

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-26936
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Yates Petroleum Corporation		6. State Oil & Gas Lease No.
3. Address of Operator 105 South Fourth Street, Artesia, NM 88210		7. Lease Name or Unit Agreement Name Charolette McKay Com
4. Well Location Unit Letter <u>E</u> : <u>1980</u> feet from the <u>North</u> line and <u>660</u> feet from the <u>West</u> line Section <u>25</u> Township <u>20S</u> Range <u>24E</u> NMPM <u>Eddy</u> County		8. Well Number 4
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3628'GR		9. OGRID Number 025575
10. Pool name or Wildcat Dagger Draw Upper Penn, South		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

- MIRU all safety equipment as needed. NU BOP. No casing recovery will be attempted as production casing is cemented to the surface.
- Set a CIBP at 7655' and cap it with 25 sx Class "H" cement. This will leave a plug over open Canyon perms.
- Spot a 35 sx Class "C" cement plug from 5791'-6000' across the Wolfcamp top and stage tool. This is a guess on the stage tool location based on the Charolette McKay #2 well which was drilled just before this well to the same depth.
- Spot a 35 sx Class "C" cement plug from 3418'-3627' across the Bone Spring top.
- Spot a 35 sx Class "C" cement plug from 2056'-2265' across the Glorieta top.
- Spot a 35 sx Class "C" cement plug from 923'-1132' across the surface casing shoe. WOC and tag, reset if necessary.
- Spot a 35 sx Class "C" cement plug from 0-209' forming the surface plug. WOC and tag, reset if necessary.
- Remove all surface equipment and weld dry hole marker as per regulations.

Wellbore schematics attached

Spud Date:

Rig Release Date:

Approved for plugging of well bore only.
 Liability under bond is retained pending receipt of C-103 (Subsequent Report of Well Plugging) which may be found at OCD Web Page under Forms, www.cmnr.state.nm.us/oed.

NM OIL CONSERVATION

ARTESIA DISTRICT

JAN 22 2016

RECEIVED

well bore must be plugged by 1/26/2017

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Tina Huerta* TITLE Regulatory Reporting Supervisor DATE January 21, 2016

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY: *JR Dack* TITLE Dist # Supervisor DATE 1/26/2016

Conditions of Approval (if any): ** See Attached COA's*

WELL NAME: Charlotte-McKay Com #4 FIELD: Dagger Draw South

LOCATION: 1,980' FNL & 660' FWL of Section 25-20S-24E Eddy Co., NM

GL: 3,611' ZERO: 17.5' KB: 3,628.5'

SPUD DATE: 2/26/92 COMPLETION DATE: 4/24/92

COMMENTS: API No.: 30-015-26936


CASING PROGRAM

9-5/8" 36# J-55	1,082'
7" 29# LT&C	8,127'

Before

TOPS

SA	638'
Glorieta	2,215'
BS	3,577'
WC	5,926'
Canyon	7,550'

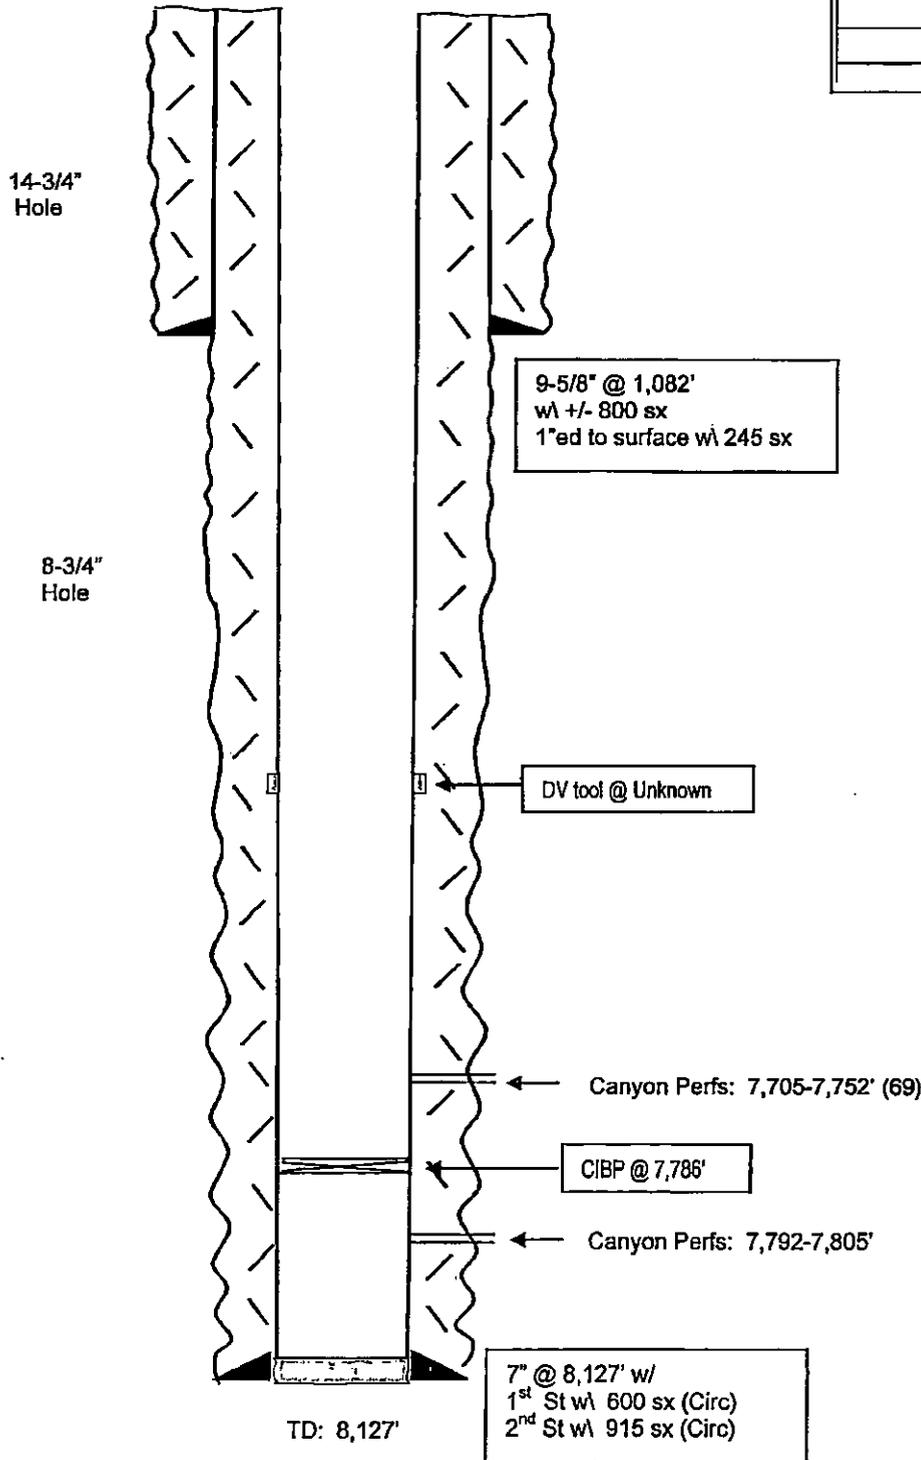

Not to Scale
3/12/15
JMH

WELL NAME: Charlotte-McKay Com # 4 FIELD: Dagger Draw South

LOCATION: 1,980' FNL & 660' FWL of Section 25-20S-24E Eddy Co., NM

GL: 3,611' ZERO: 17.5' KB: 3,628.5'

SPUD DATE: 2/26/92 COMPLETION DATE: 4/24/92


COMMENTS: API No.: 30-015-26936

CASING PROGRAM

9-5/8" 36# J-55	1,082'
7" 29# LT&C	8,127'

After

TOPS	
SA	638'
Glorieta	2,215'
BS	3,577'
WC	5,926'
Canyon	7,550'

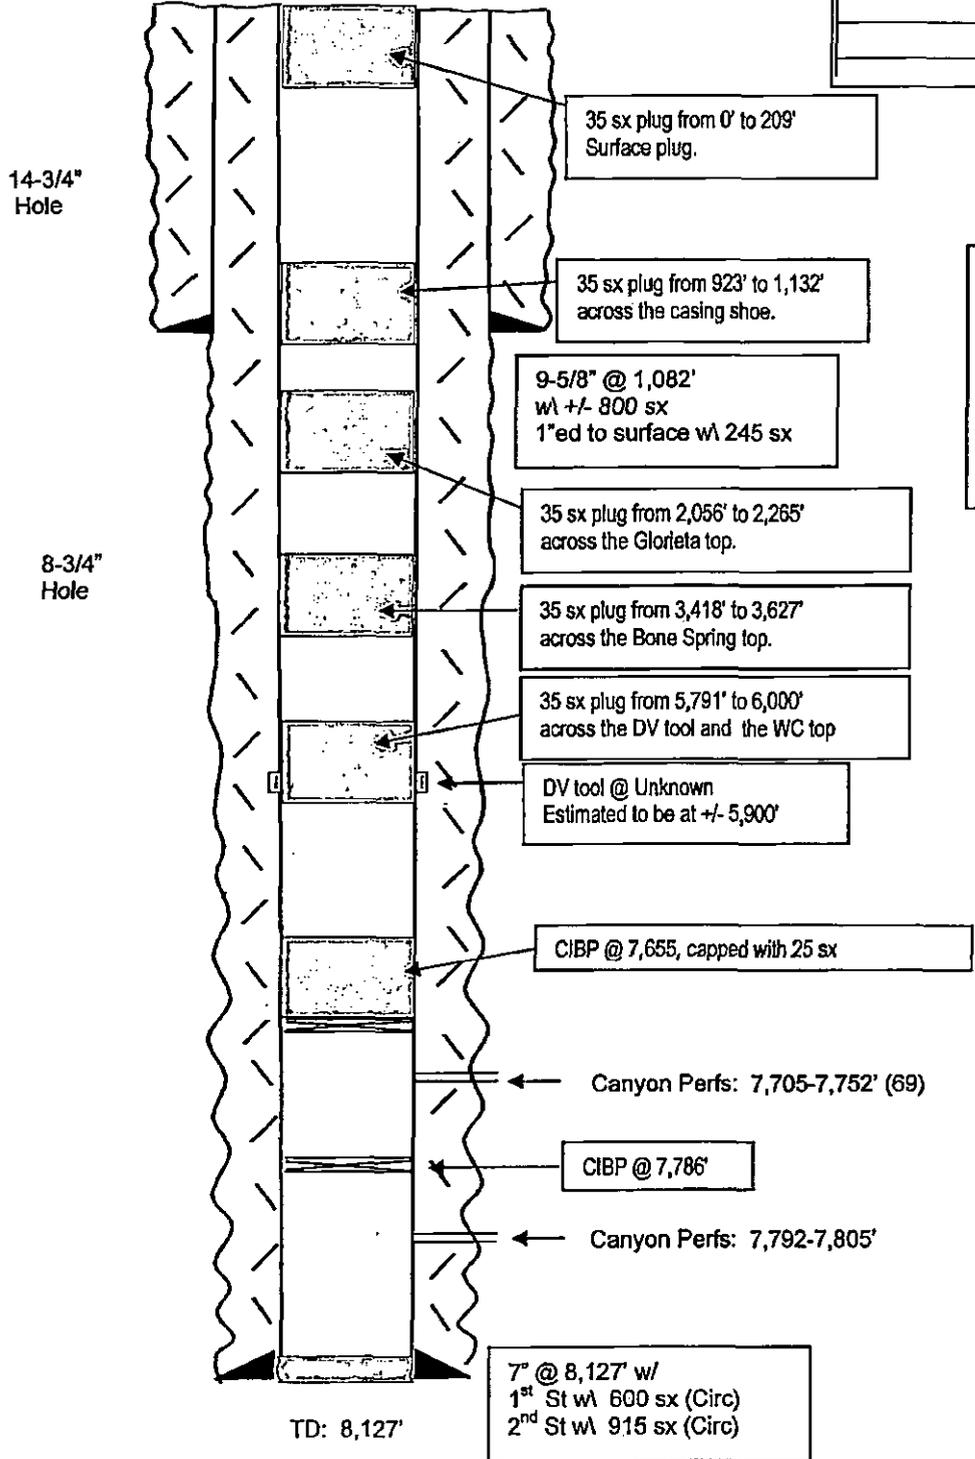

Not to Scale
9/9/15
JMH

NEW MEXICO OIL CONSERVATION DIVISION
DISTRICT 2 OFFICE
811 S. FIRST STREET
ARTESIA, NM 88210
(575)748-1283

CONDITIONS OF APPROVAL FOR PLUGGING & ABANDONMENT

Operator: Yates Fel.

Well Name & Number: Charlotte McKay COM #4

API #: 30 - 015 - 26936

1. Produced water **will not** be used during any part of the plugging & abandonment operation.
2. Notify NMOCD Dist. 2 office at least 24 hrs before beginning work.
3. Closed Loop System is to be used for entire plugging operation. Upon completion, contents of steel pit are to be hauled to a permitted disposal location.
4. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator, as well as the contractor, to verify that this permit is place prior to performing work. Drivers shall produce a copy upon request of NMOCD Field Inspectors.
5. A subsequent C-103 will serve as notification that the well bore has been plugged ONLY. A C-103 FINAL shall be filed before any bonding can be released on the well. Upon receipt of the Final, an inspection will be performed to verify that the location has been satisfactorily cleaned to NMOCD standards.
6. If work has not begun within 90 days of the approval of this procedure, an extension request must be filed, stating reason that well has not been plugged.
7. Every attempt must be made to clean the well bore out to below the perms, before any plugs can be set, by whatever means possible.
8. **Cement Retainers may not be used.**
9. **Squeeze pressures are not to exceed 500 PSI, unless approval is given by NMOCD.**
10. **Plugs may be combined after consulting with and getting approval from NMOCD.**
11. **Minimum WOC time for tag plugs will be 4 Hrs.**
12. **19.15.7.16 : B.** In the case of a dry hole, a complete record of the well on form C-105 with the attachments listed in Subsection A of 19.15.7.16 NMAC shall accompany the notice of intention to plug the well, unless previously filed. The division shall not approve the plugging report or release the bond the operator has complied with 19.15.7.16 NMAC.

DATE: 1/26/2016

APPROVED BY: AS

N.M.O.C.D.- Guidelines For Plugging

- All cement plugs will be a minimum of 100' in length, or a minimum of 25sx. Of cement, whichever is greater.
- Mud laden fluids must be placed between all cement plugs.
- Mud laden fluids must be mixed at 25 sx. Of gel per 100 bbls. Of water.
- A cement plug is required to be set 50' below, and 50' above all casing shoes, and casing stubs. **These plugs must be tagged.**
- A CIBP with 35' of cement on top, may be set instead of 100' plug.
- A plug as indicated above, must be placed within 100' of top perforation. **This plug must be tagged.**
- Plugs set above and below all salt zones, **must be tagged.**
- No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.
- D.V. tools are required to have a 100' cement plug set 50' above, and 50' below the tool. **This plug must be tagged.**

Formations to be isolated with plugs placed at the top of each formation are:

- Fusselman
- Devonian
- Morrow
- Wolfcamp
- Bone Springs
- Delaware
- Any salt section (plug at top and bottom)
- Abo
- Glorietta
- Yates (this plug is usually at base of salt section)

If cement does not exist behind casing strings at recommended formation depths, the casing must be cut and pulled with plugs set at these depths, or casing must be perforated and squeezed behind casing at the formation depths.

In the R-111P area (Potash mine area) a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than a 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.