### OCD\_ARTESIA

¥ 0.5 / i	MICT FOIL	1			
Form 3160-3 (April 2004) UNITED STATES		RECEIV	(ED	OMB No	APPROVED 1. 1004-0137 Tarch 31, 2007
DEPARTMENT OF THE IN		MAR 27	2006	<ol> <li>Lease Serial No. NM NM 98791</li> </ol>	
BUREAU OF LAND MANA APPLICATION FOR PERMIT TO D		COD: ANT	MOIN	6. If Indian, Allotee	or Tribe Name
la. Type of work:	R	(3)5	5714	7 If Unit or CA Agre	ement, Name and No.
lb. Type of Well: Oil Well Gas Well Other	<b>✓</b> Singl	le Zone Multip	ole Zone	8. Lease Name and V Music Box Fed	
2. Name of Operator Parallel Petroleum Corporation	303	87		9. API Well No.	- 34776
		include area code)	wilde	10. Field and Pool, or I	
4. Location of Well (Report location clearly and in accordance with any	State requirement	<sup>k.*)</sup> Liko Appo	9	11. Sec., T. R. M. or B	lk. and Survey or Area
At surface 300' FSL and 1780' FWL  At proposed prod. zone PP 660' FSL and 1780' FWL, BHL	. 660' FNL and	3y \$€€€9 d 1780' FWL		12-19S-21E	
14. Distance in miles and direction from nearest town or post office*  9 miles south of Hope, New Mexico				12. County or Parish  Eddy	13. State
15. Distance from proposed* location to nearest property or lease line, ft.  (Also preparest drig, unit line if any) 660'	16. No. of acre	es in lease	17. Spacir	ng Unit dedicated to this v	well
18. Distance from proposed location*	19. Proposed I				
to nearest well, drilling, completed, applied for, on this lease, ft. 5800'	5500' TVD	, 8547' MD	NMB	8000265	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) GL 4187'	22. Approxima	ate date work will sta 04/15/2005	rt*	23. Estimated duratio 30 days	n
	24. Attach	ments	Roswe	II Controlled Wat	er Basin
The following, completed in accordance with the requirements of Onshor	e Oil and Gas O	rder No.1, shall be a	ttached to th	nis form:	
Well plat certified by a registered surveyor.     A Drilling Plan.		<ol> <li>Bond to cover t Item 20 above).</li> </ol>		ons unless covered by an	existing bond on file (see
3. A Surface Use Plan (if the location is on National Forest System SUPO shall be filed with the appropriate Forest Service Office).	Lands, the	<ul><li>5. Operator certifie</li><li>6. Such other site authorized office</li></ul>	specific inf	formation and/or plans as	s may be required by the
25. Signature leane Kerlam		Printed/Typed) Peane Durham			Date IMAR2000
Title Drilling Engineer, Parallel Petroleum Corporatio	n				
Approved by (Signature) /S/ Tony J. Herrell	Name (	Printed/Typed) /s/ Ton	y J. H	[errell_	Date MAR 2 4 2
FIELD MANAGER	Office	CARLS	SBAD	FIELD O	FFICE
Application approval does not warrant or certify that the applicant hold conduct operations thereon.  Conditions of approval, if any, are attached.	s legal or equita	ble title to those righ		-	entitle the applicant to FOR 1 YEAI

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on page 2)

« **4**د.

Declared water basing Cement behind the 9 5 CASING MUST BE CIKCULATED

WITHEGO

APPROVAL SURJECT TO GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS ATTACHED

If earthen pits are used in association with the drilling of this well, an OCD pit permit must be obtained prior to pit construction.

DISTRICT I'
1625 N. French Dr., Hobbs, NM 88240

State of New Mexico

Energy, Minerals & Natural Resources Department

Form C-102
Revised August 15, 2000
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505

DISTRICT IV 2040 South Pacheco, Santa Fe, NM 87505 ☐ AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code 96 086	Pool Code Pool Name  96086 Wildcat: Wolfcan			
Property Code		erty Name DX FEDERAL	AL Well Number		
OGRID No.	-	ator Name LEUM CORPORATION	Elevation 4187'		


### Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	12	19 S	21 E		300	SOUTH	1780	WEST	EDDY

### Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
С	12	19 S	21 E		660	NORTH	1780	WEST	EDDY
Dedicated Acres	Joint o	r Infill Co	nsolidation	Code Ore	ier No.				
320									

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

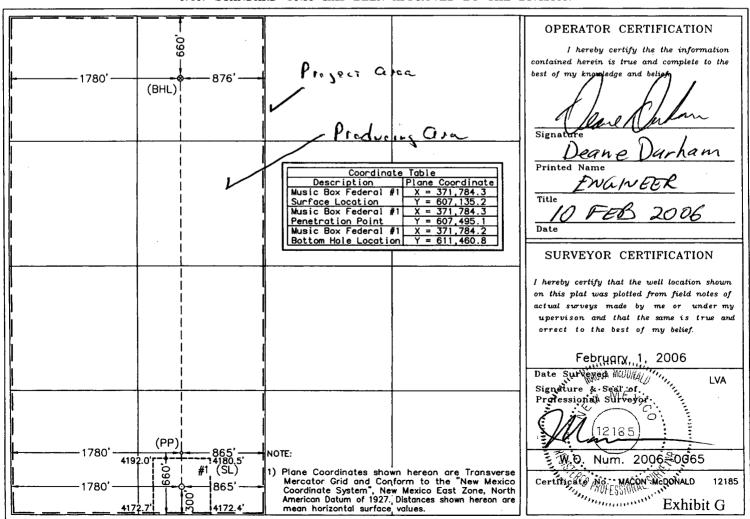

District II
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

### State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Form C-144

June 1, 2004

### Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes \( \subseteq \) No X

Type of action: Registration of a pit or below-grade tank X Closure of a pit or below-grade tank \( \subseteq \)

Type of dotton. Togothation of a pire	r below grade tank 1x closure of a pit of celow grade	
Operator: Parallel Petroleum Corporation Telephone:	432-684-3905 e-mail address: gmil	ler@hec-enviro.com
Address: 1004 N. Big Spring Street, Suite 400, Midland, Texas 797	01	
Facility or well name: Music Box Federal #1 API #:	U/L or Qtr/Qtr Unit N Sec 1	2 T 19S R 21E
County: Eddy Latitude 32°	40' 6.23" N Longitude 104° 46' 59.43	" W NAD: 1927 X 1983 🗍
Surface Owner: Federal X State Private Indian		
Pit	Below-grade tank	
Type: Drilling X Production Disposal	Volume:bbl Type of fluid:	RECEIVED
Workover	Construction material:	[[] 7 4 page
Lined X Unlined	Double-walled, with leak detection? Yes 🔲 If not,	explain why not.
Liner type: Synthetic X Thickness 12 mil Clay		VUU-AITESIA
Pit Volume 25,000 bbl		
Double to amount of the first o	Less than 50 feet	(20 points)
Depth to ground water (vertical distance from bottom of pit to seasonal	50 feet or more, but less than 100 feet	(10 points) 0
high water elevation of ground water.) 750°	100 feet or more	( 0 points)
	Yes	(20 points)
Wellhead protection area: (Less than 200 feet from a private domestic	No	( 0 points) 0
water source, or less than 1000 feet from all other water sources.)		
Distance to surface water: (horizontal distance to all wetlands, playas,	Less than 200 feet	(20 points)
irrigation canals, ditches, and perennial and ephemeral watercourses.)	200 feet or more, but less than 1000 feet	(10 points) <b>0</b>
	1000 feet or more	( 0 points)
	Ranking Score (Total Points)	0
If this is a pit closure: (1) Attach a diagram of the facility showing the pit's your are burying in place) onsite   offsite   If offsite, name of facility		
remediation start date and end date. (4) Groundwater encountered: No 🗌 Y	es If yes, show depth below ground surface	ft. and attach sample results.
(5) Attach soil sample results and a diagram of sample locations and excavat	ions.	
Additional Comments:		
I hereby certify that the information above is true and complete to the best of has been/will be constructed or closed according to NMOCD guidelines		
Date: 2-6-06		
Printed Name/Title Gary Miller, Agent Phone 432/682/4559	Signature	
Your certification and NMOCD approval of this application/closure does notherwise endanger public health or the environment. Nor does it relieve the regulations.	ot relieve the operator of liability should the contents of the operator of its responsibility for compliance with an	of the pit or tank contaminate ground water or y other federal, state, or local laws and/or
Approval: Gerry Guye		/
Printed Name/Title Compliance Officer	Signature Demyour	Date: 2-17-06
Fellibration Attor	Signature /	Date.
	<del>- ,</del>	

### SURFACE AND OPERATIONS PLAN FOR DRILLING, COMPLETION, AND PRODUCING

### PARALLEL PETROLEUM CORPORATION MUSIC BOX FEDERAL #1 SHL: 300' FSL AND 1780' FWL, SEC 11, T19S, R21E EDDY COUNTY, NEW MEXICO

### **LOCATED:**

9 miles South of Hope, New Mexico

### OIL & GAS LEASE:

NM NM 98791

### **RECORD LESSEE:**

Nearburg Exploration Company, LLC 3300 N. A Street, Bldg. 2 #120 Midland, Texas 79705

### **BOND COVERAGE:**

\$25,000 statewide bond # NMB000265 of Parallel Petroleum Corporation

### **ACRES IN LEASE:**

1922.48

### **SURFACE OWNER:**

Federal

### **SURFACE TENANT:**

Barbra Runyon Ranch P.O. Box 2468 Roswell, NM 88202 Jim Bob Burnet, Ranch Manager, 505-484-3141

### POOL:

Primary Objective - Wolfcamp

### MUSIC BOX FEDERAL #1 Page 2

### **EXHIBITS:**

- A. Area Road Map
- B. Drilling Rig Layout
- C. Pad Elevation Plat
- D. Vicinity Map
- E. Area Production Map
- F. Topographic & Location Verification Map
- G. Well Location & Acreage Dedication Map (NMOCD Form C-102)
- H. NMOCD Form C-144, Pit Registration (Original forwarded to NMOCD)
- I. Blow Out Preventer (BOP) Schematic
- J. Choke Manifold Schematic
- K. Estimated Horizontal Survey Calculation Program
- L. Estimated Wellbore Plot

### 1. EXISTING ROADS

- A. Exhibits A and D are area road maps showing existing roads in the vicinity of the site.
- B. Exhibit F is a topographic map of the location showing existing roads and the proposed new access road.

### 2. <u>ACCESS ROADS</u>

### A. Length and Width

The access road will be built as shown on Exhibit D. The access road will come off County Road 20 and go east on to an existing 2 track road that runs along side an H-Frame power line. This access road may be utilized for as many as four drill sites including this one. The two track road will be improved for oilfield use. The road will go east 5995' and then turn left (north) 498' to the proposed location. Both the improved two track and new access road will be surfaced with caliche and will be 16' to 24' wide with a total length of 6493'. A 75' wide turn in will be constructed onto the access road at County Road 20 and at each wellsite turn in.

### B. Surface Material

Caliche from a commercial source.

### C. Maximum Grade

Less than five percent.

### **MUSIC BOX FEDERAL #1**

### Page 3

### D. Turnouts

Two turnouts will be constructed on the access road.

### E. Drainage Design

There will be at least three low water crossings constructed on the existing two track road.

### F. Culverts

It is not anticipated that any culverts will be needed on the access road at this time.

### G. Gates and Cattle Guards

No gates or cattle guards will be installed as no fences will be crossed for this location or access road.

### 3. LOCATION OF EXISTING WELLS

Existing wells in the immediate area are shown in Exhibit "E".

### 4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

Necessary production facilities for this well will be located on the well pad.

### 5. LOCATION AND TYPE OF WATER SUPPLY

A water well may be drilled on this location for water supply for both drilling and completion. Upon completion of operations on this site the well may be used for drilling of additional wells on this lease. The well will be made available for the surface tenant upon completion of drilling in this area for use as stock water. A permit will be secured from the New Mexico Office of the State Engineer for this water well.

### 6. METHODS OF HANDLING WASTE DISPOSAL

- A. Drilling fluids will be allowed to dry in the drilling pits until the pits are closed.
- B. Water produced during tests will be disposed of in the drilling pits.
- C. Oil produced during tests will be stored in test tanks.
- D. Trash will be contained in a trash trailer and removed from well site.

### **MUSIC BOX FEDERAL #1**

### Page 4

- E. All trash and debris will be removed from the well site within 30 days after finishing drilling and/or completion operations.
- F. The reserve pit will be closed as per BLM and NMOCD regulations and guidelines. This will include leaving the drill cuttings in place in the pit, allowing them to dry, and covering the pit with at least 3' of backfill while not disturbing the pit liner. The cuttings may also be placed in a lined trench along side the drilling pit for disposal. If this disposal method is used the cuttings will be covered with a plastic liner and then covered with a minimum of 3' of backfill.

### 7. ANCILLARY FACILITIES

None required.

### 8. WELL SITE LAYOUT

Exhibit B shows the relative location and dimensions of the well pad, mud pits, reserve pit, and the location of major rig components.

### 9. PLANS FOR RESTORATION OF THE SURFACE

- A. After completion of drilling and/or completion operations, all equipment and other material that will not be used lease for operations will be removed from the site.
- B. After abandonment, all equipment, trash, and debris will be removed and the site will be reclaimed as per BLM permit stipulations.

### 10. OTHER INFORMATION

### A. Topography

The project is located on open, rolling ridge slopes, with east/southeast exposure. The area has a regional drainage being to the south and east toward Gardner Draw.

### B. Soil

Soils are very thin and shallow, tan/pink/grey loamy sandy silts, overlying limestone bedrock.

### MUSIC BOX FEDERAL #1

### Page 5

### C. Flora and Fauna

The location is located on a ridge and the vegetation consist of broom snakeweed, grasses, creosote, cholla, yucca catclaw, prickly pear, beargrass and various species of cacti.

### D. Ponds and Streams

Gardner Draw, an intermittent stream which flows west to east, is located ½ mile south of the site. A small stock pond is located 1800' southeast of the location. Drainage from this site will eventually flow into Gardener Draw. There are no other rivers, lakes, ponds, or streams in the area.

### E. Residences and Other Structures

The Barbra Runyon Ranch house is located 1 miles northeast of the proposed well site

### F. Archaeological, Historical, and Cultural Sites

See archaeological report # SNMAS-06NM-2080

submitted by:

Southern New Mexico Archaeological Services, Inc.,

P.O. Box 1

Bent, New Mexico 88314 Phone 505-671-4797

### G. Land Use

Grazing

### H. Surface Ownership

Federal

### 11. OPERATOR'S REPRESENTATIVE

Deane Durham, Engineer Parallel Petroleum Corporation 1004 North Big Spring Street, Suite 400 Midland, Texas 79701 Office: (432) 684-3727

### MUSIC BOX FEDERAL #1 Page 6

### 12. <u>CERTIFICATION</u>

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Parallel Petroleum Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

2006

Date

Name: Deane Durham

Title: Engineer

## ATTACHMENT TO FORM 3160-3 MUSIC BOX FEDERAL #1 Surface Hole Location 300 FSL AND 1780 FWL, SEC 12, 19S, 21E Bottom Hole Location 660 FNL AND 1780 FWL, SEC 12, 19S, 21E EDDY COUNTY, NEW MEXICO

### **DRILLING PROGRAM**

This well is designed as a horizontal test in the Wolfcamp formation.

### 1. GEOLOGIC NAME OF SURFACE FORMATION

San Andres

### 2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS

Glorieta 1795'(+2392') Tubb 2801'(+1386') Yeso 2941' (+1246')

Abo Shale 3441' (+746')

Abo Carbonate 3585' (+602')

Wolfcamp 4393' (-206')

Wolfcamp Shale 4499'(-312')

### 3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL, OR GAS

Fresh water

790'

Oil and Gas

Wolfcamp 4393' (-206')

No H<sub>2</sub>S gas should be encountered

### 4. CASING AND CEMENTING PROGRAM

Casing Size	<u>From To</u>	<u>Weight</u>	<u>Grade</u>	<u>Joint</u>
20" conductor	0'-40'			
9 5/8"	0'-1300'	36#	J-55	LTC
5 1/2"	0' - 9,325'	17#	N-80	LTC

Equivalent or adequate grades and weights of casing may be substituted at time casing is run, depending on availability.

### MUSIC BOX FEDERAL #1 Page 2

9-5/8" slurry: Lead: 125 sacks (50:50) Poz (Fly Ash): Class C + 5% bwow Sodium Chloride + 10% bwoc Bentonite + 151.7% fresh water. Tail: 200 sacks Class C + 1% bwoc Calcium Chloride + 56.3% fresh water

Note: If cement does not circulate to surface, notify BLM. A temperature survey will most likely be required. Top out to surface with 1" pipe in the annulus.

Note: 5-1/2" Cement per completion procedure.

### **Drilling Procedure**

- a. Set 20" conductor pipe at 40' with a rathole unit.
- b. Drill 12 ¼" surface hole to an approximate depth of 1300', using fresh water and viscous sweeps for hole cleaning. Set 9 5/8", 36# J-55 casing with 460 sx, Class C cement (lead will be 50/50 Poz, circulate to surface, 1" if necessary).
- c. Set slips on 9 5/8" CSG. Cut 9 5/8" CSG and NU & test BOP.
- d. Drill 8 3/4" production hole to 5500', using cut brine to an approximate depth of 3400' and a starch mud system to TD.
- e. Run open-hole logs
- f. Plug lower portion of the hole, per OCD/BLM specifications.
- g. Set CMT kick-off plug.
- h. Dress CMT to kick off point at approximately 4100', oriented at 0 degree (grid) azimuth.
- i. Build angle at 14 degrees per 100' to 90 degrees and hold.
- j. Drill 7 7/8" horizontal drain hole to a terminus of 660' FNL.
- k. Run 5 ½" 17# N-80 CSG to TD. Cement with 500 sx Class C
- 1. Rig Down Rotary Tools

### 5. <u>MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL</u>

The BOP stack will consist of a 3,000 psi working pressure, dual ram type preventer and annular.

A BOP sketch is attached.

### 6. TYPES AND CHARACTERS OF THE PROPOSED MUD SYSTEM

- a. Spud and drill to 1,300' with 8.3 ppg Fresh Water system and viscous sweeps for hole cleaning.
- c. The production section from 1,300' to 4,300' will utilize a cut brine mud system.
- d. The remaining production section from 4,300' to TD will be a starch mud system with mud weight sufficient to control formation pressures.

### MUSIC BOX FEDERAL #1 Page 3

### 7. <u>AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT</u>

None required.

### 8. LOGGING, TESTING, AND CORING PROGRAM

Mud logs as well as DLL/CNL/LDT/CAL/GR logging is planned. Drill stem tests, cores and sidewall cores are possible.


### 9. <u>ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES & POTENTIAL HAZARDS</u>


None anticipated.

BHP expected to be 1,100 psi.

### 10. ANTICIPATED STARTING DATE:

It is planned that operations will commence around second quarter of 2006 with drilling and completion operation lasting about 35 days.

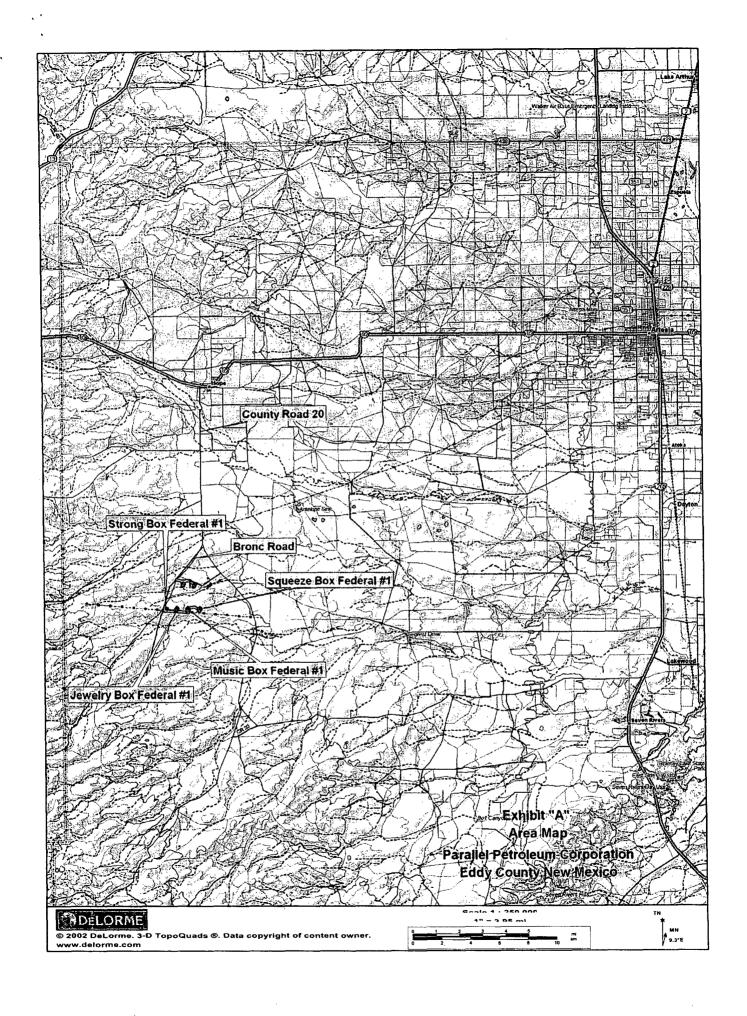

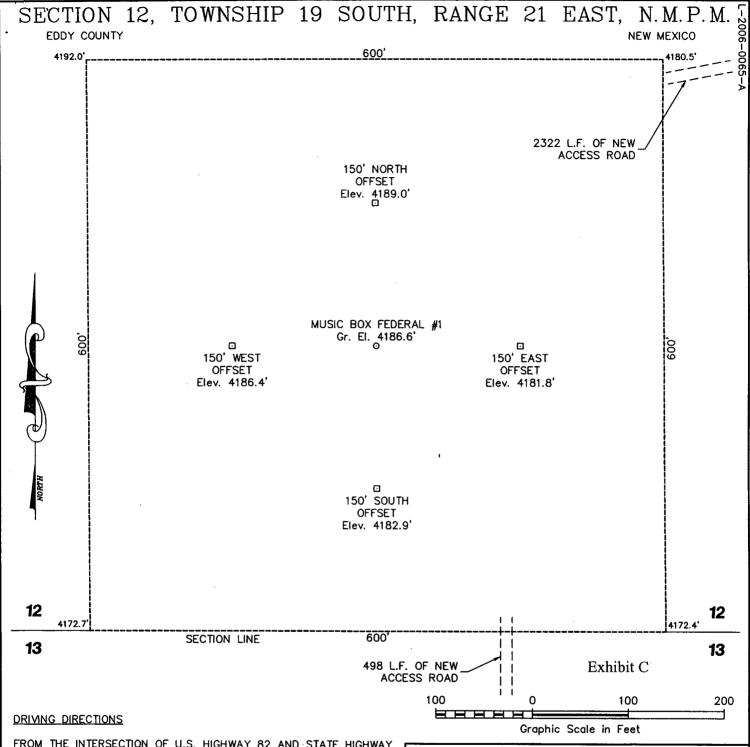

FROM THE INTERSECTION OF U.S. HIGHWAY 82 AND STATE HIGHWAY 449 IN HOPE, NM GO SOUTH ON SAID STATE HIGHWAY 449 2.2 MILES TO THE END OF SAID STATE HIGHWAY 449 AND THE BEGINNING OF COUNTY ROAD 12, THEN CONTINUE SOUTH ANOTHER 4.8 MILES (7.0 TOTAL) TO A FORK IN THE ROAD, THE INTERSECTION OF SAID COUNTY ROAD 12 AND COUNTY ROAD 20 (BRONC ROAD), THEN GO SOUTHWEST ALONG SAID COUNTY ROAD 20 (BRONC ROAD) 3.5 MILES TO A POINT WHERE A PROPOSED ACCESS ROAD BEGINS ON EAST (LEFT) SIDE OF SAID COUNTY ROAD 20, THEN GO SOUTHEAST ALONG SAID ACCESS ROAD 1.1 MILE TO A POINT WHERE ANOTHER PROPOSED ACCESS ROAD BEGINS ON THE NORTH (LEFT) SIDE OF SAID ACCESS ROAD, THEN GO NORTH 0.1 MILE TO THE PROPOSED LOCATION.

WEST
COMPANY
of Midland, Inc.

110 W. LOUISIANA, STE. 110 MIDLAND TEXAS, 79701 (432) 687-0865 - (432) 687-0868 FAX


### PARALLEL PETROLEUM CORPORATION

### MUSIC BOX FEDERAL #1

Located 300' FSL & 1780' FWL, Section 12 Township 19 South, Range 21 East, N.M.P.M. Eddy County, New Mexico

Drawn By: LVA	Date: February 10, 2006					
Scale: 1"=100'	Field Book: 326 / 25-27, 30-31					
Revision Date:	Quadrangle: Antelope Sink					
W.O. No: 2006-0065	Dwg. No.: L-2006-0065-A					

### LOCATION VERIFICATION MAP

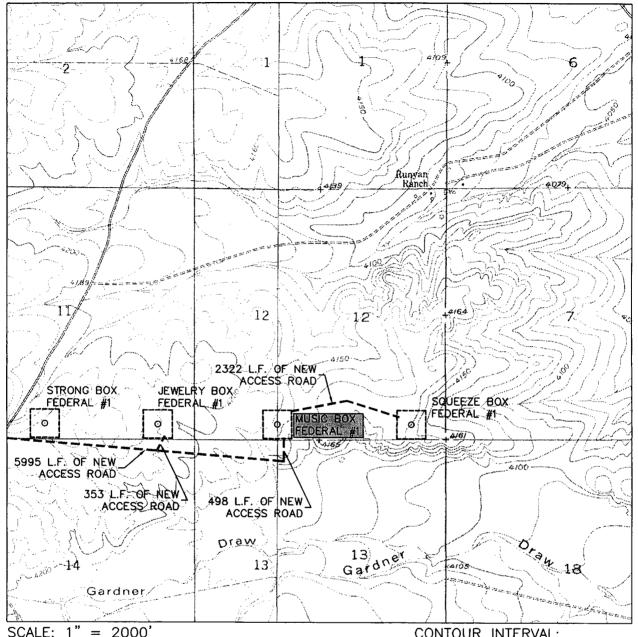


= 2000SCALE: 1

CONTOUR INTERVAL: ANTELOPE SINK - 10'

SEC. 12	2 IWP. 19-5 RGE. 21-E
SURVEY	N.M.P.M.
COUNTY	EDDY
DESCRIP	TION 300' FSL & 1780' FWL
ELEVATIO	N 4187'
OPERATO	OR PARALLEL PETROLEUM CORPORATION

LEASE MUSIC BOX FEDERAL

U.S.G.S. TOPOGRAPHIC MAP ANTELOPE SINK, N.M.




WEST

COMPANY


110 W. LOUISIANA, STE. 110

MIDLAND TEXAS, 79701

687-0865 - (432) 687-0868 FAX

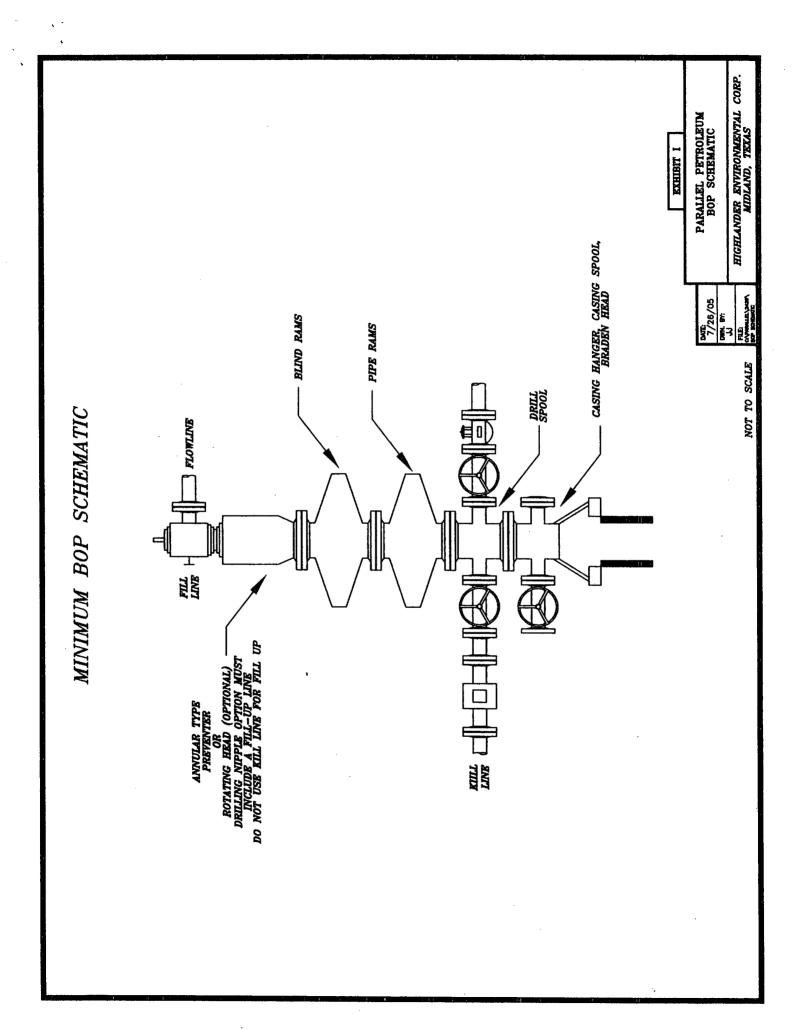

# $\begin{array}{ccc} CHOKE & MANIFOLD \\ \mathcal{5}M & SERVICE \end{array}$

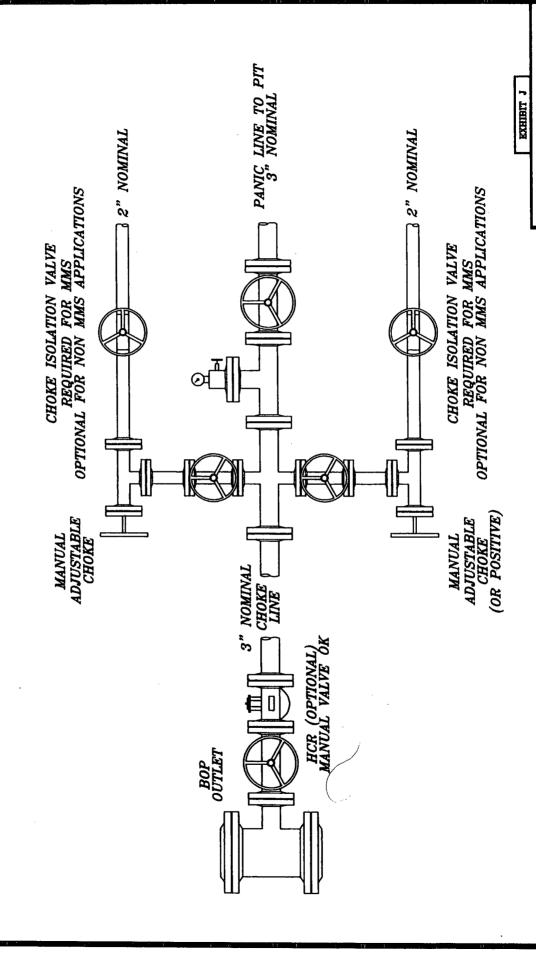

HIGHLANDER ENVIRONMENTAL CORP.
MIDLAND, TEXAS


DATE: 8/17/05
DWN. BY:
JJ
FILE: CYMMULAL/MOST
GOODE BURNOLD

NOT TO SCALE

PARALLEL PETROLEUM CHOKE MANIFOLD

11	PET	AF	A L	LE		JRVEY (	CALCULA	ITION	I PROGR	AM
OPER	ATOR		Parallel P	etroleum (	Corporation	on	Supervisor	s:		
MELL			Music Bo							
	TION:		Sec. 12 T-	19-S R-21	-E					
API N	UMBE	R:		*****						
			COMM	ENTS:						
		,							EC.(-/+)	
									ORR.(-/+)	1
1414141414	<del>mina</del>								CORR.(-/+)	0.0
			02/09/06		TIME;	6:10 PM	TRUE TO GRID	)		<b>\\</b>
	JM CURY	/ATURE (	CALCULATIO	VS(SPE-3362	) PI	ROPOSED	DIRECTION	0.0		RACKING NTER
SVY NUM	MD	INC	GRID AZM	TVD	VERT SECT	N-S	E-W	DLS/ 100	ABOVE(+) BELOW(-)	RIGHT(+)
TIE	0	0.0	0.0	0.0	0.0	0.0	0.0		***************************************	
1	4011	0.0	0.0	4011.0	0.0	0.0	0.0	0.0	382.0	0.0
2	4021	1.5	0.0	4021.0	0.1	0.1	0.0	15.0	372.0	0.0
3	4031	3.0	0.0	4031.0	0.5	0.5	0.0	15.0	362.0	0.0
4	4609	90.4	0.0	4390.1	381.6	381.6	0.0	15.1	0.3	0.0
5	8547	90.4	0.0	4362.6	4319.5	4319.5	0.0	0.0	0.3	0.0

KOP @ 4011' MD BUR = 15 DEG per 100 FT End Curve @ 4609' MD, 4390.1' TVD BHL @ 8547' MD, 4362.6' TVD, 4319.5' VS

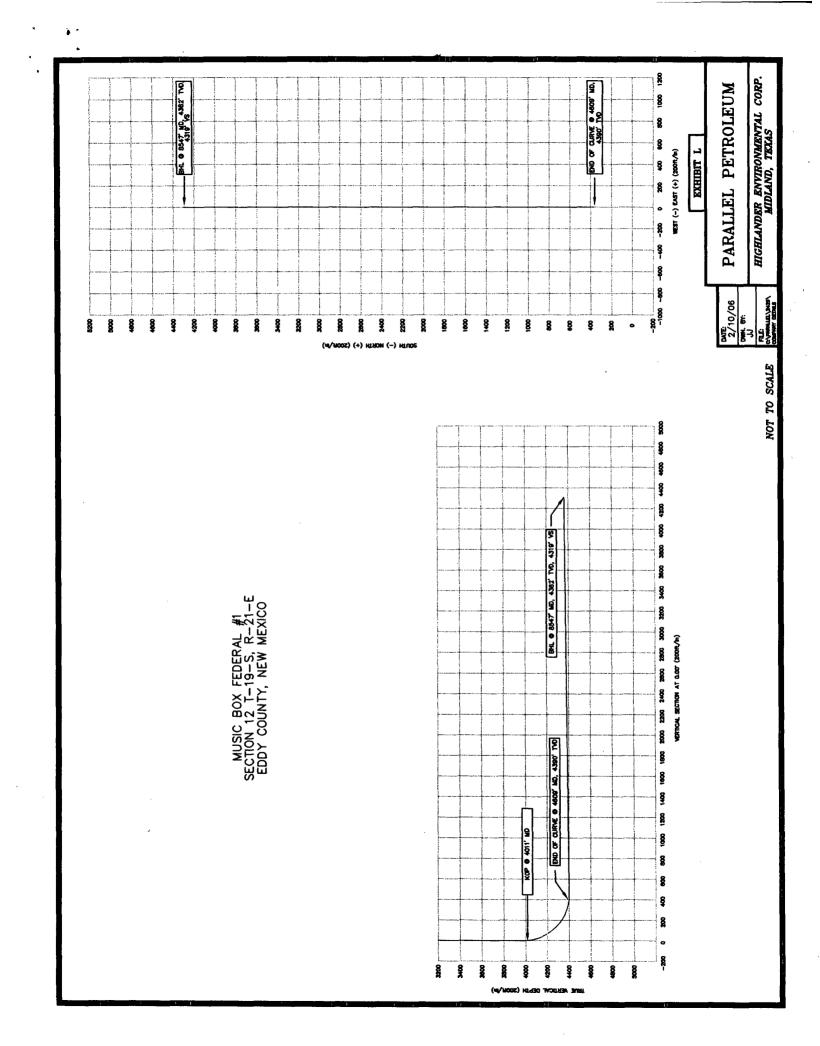

### CONDITIONS OF APPROVAL - DRILLING

Operator's Name: <u>Parallel Petroleum Corporation</u> Well No. <u>1 – Music Box Federal</u>

Location: SH: 300' FSL & 1780' FWL BH: 660' FNL & 1780' FWL sec. 12, T. 19 S., R. 21 E.

Lease: NM-98791

### I. DRILLING OPERATIONS REQUIREMENTS:

1. The Bureau of Land Management (BLM) is to be notified at (505) 234-5972 in sufficient time for a representative to witness:

### A. Spudding

- B. Cementing casing: 9-5/8 inch 5-1/2 inch
- 2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
- 3. Include the API No. assigned to well by NMOCD on the subsequent report of setting the first casing string.

### II. CASING:

- 1. <u>9-5/8</u> inch surface casing should be set <u>at approximately 1300 feet</u>, below usable water and circulate cement to the surface. If cement does not circulate to the surface, the Carlsbad Field Office shall be notified at (505) 234-5972 and a temperature survey or cement bond log shall be run to verify the top of the cement. Remedial cementing shall be completed prior to drilling out that string.
- 2. Minimum required fill of cement behind the <u>5-1/2</u> inch production casing is <u>sufficient to tie back 500 feet above</u> the uppermost perforation in the pay zone.

### **III. PRESSURE CONTROL:**

- 1. Before drilling below the <u>9-5/8</u> inch surface casing, the blowout preventer assembly shall consist of a minimum of One Annular Preventer or Two Ram-Type Preventers and a Kelly Cock/Stabbing Valve.
- 2. Minimum working pressure of the blowout preventer and related equipment (BOPE) shall be 2000 psi.
- 3. The BOPE shall be installed before drilling below the <u>9-5/8</u> inch surface casing and shall be tested as described in Onshore Order No. 2. Any equipment failing to test satisfactorily shall be repaired or replaced.
- A. The results of the test will be reported to the BLM Carlsbad Field Office at 620 East Greene Street, Carlsbad, New Mexico 88220-6292.
- B. Testing fluid must be water or an appropriate clear liquid suitable for sub-freezing temperatures. Use of drilling mud for testing is not permitted since it can mask small leaks.
- C. Testing must be done in a safe workman like manner. Hard line connections shall be required. mud returns from the well.