

District I (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 3001525991
5. Indicate Type of Lease STATE [] FEE [x]
6. State Oil & Gas Lease No. 317259
7. Lease Name or Unit Agreement Name Rose 12A
8. Well Number 1
9. OGRID Number
10. Pool name or Wildcat STRAWN WC-0155192512A
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3391.9 GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)
1. Type of Well: Oil Well [] Gas Well [] Other [x]
2. Name of Operator Percussion Petroleum Operating
3. Address of Operator 919 Milam St, Suite 2475, Houston TX 77002
4. Well Location Unit Letter A : 990 feet from the 990 N line and 990 feet from the E line
Section 12 Township 19S Range 25E NMPM County Eddy
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3391.9 GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK [] PLUG AND ABANDON [x]
TEMPORARILY ABANDON [] CHANGE PLANS []
PULL OR ALTER CASING [] MULTIPLE COMPL []
DOWNHOLE COMMINGLE []
CLOSED-LOOP SYSTEM []
OTHER: []
SUBSEQUENT REPORT OF:
REMEDIATION WORK [] ALTERING CASING []
COMMENCE DRILLING OPNS [] P AND A []
CASING/CEMENT JOB []
OTHER: []

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

SEE ATTACHED PLUGGING Procedure & Diagram
Notif, NMOC 24 hrs before MIRA

NM OIL CONSERVATION ARTESIA DISTRICT

AUG 09 2018

RECEIVED

Spud Date: 9/30/88 Rig Release Date: 10/25/88
* See Attached COA's Must be Plugged by 8-10-19
I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tobin Rhodes TITLE VP-Production DATE

Type or print name Tobin Rhodes E-mail address: toby@percussionpetroleum.com PHONE: 575 748 5359

APPROVED BY: [Signature] TITLE STA H Ms DATE 8-10-18
Conditions of Approval (if any):

Percussion Petroleum Operating

3001525991 – Rose 12A #1

Proposed Plugging Procedure

August 9, 2018

1. MIRU pulling unit.
2. Pull all tubing from hole
3. Pickup CIBP and TIH to ~~8100~~ 8400 *CIBP*
4. Circulate hole with 10# mud.
5. Spot 25 sacks of cement on top of CIBP – WOC + Tag
6. POOH.
7. Run in hole with wireline perf gun and perforate at 5650'
8. TIH with squeeze retainer on tubing. Set at 5600.
9. Squeeze with 30 sacks.
10. Spot 5 sacks on top of retainer – WOC + Tag
11. POOH
12. Run in hole with wireline perf gun and perforate at 3550'
13. TIH with squeeze retainer on tubing. Set at 3500.
14. Squeeze with 30 sacks.
15. Spot 5 sacks on top of retainer – WOC + Tag
16. POOH
17. Run in hole with wireline perf gun and perforate at 1400'
18. TIH with squeeze retainer on tubing. Set at 1350.
19. Squeeze with 30 sacks.
20. Spot 5 sacks on top of retainer. – WOC + Tag
21. POOH to 100' – Perf + Attempt to Circulate to Surf
22. Spot 10 sack plug in 4 ½ Casing
23. Dump 10 sacks down 4 ½- 8 5/8 annulus
24. Weld on plate and erect regulation dry hole marker.

- 3001525991 - 12-19S-25E - Eddy County, NM
- Rose 12A #1 - Percussion Petroleum Operating

Propose to place 10 sack plug inside 4 1/2" casing at the surface. Dump 10 sacks down 4 1/2 8 5/8 annulus

Propose to perforate at 1400'. Then set squeeze retainer at 1350' and squeeze with 30 sacks of cement. Then spot 5 sacks on top of retainer. Cement inside and outside 4 1/2 > 100'

8 5/8", 24 #, J55 casing set at 1350' in 12 1/4" hole. Cemented with 1250 sacks of cement. Cement circulated.

Propose to perforate at 3550'. Then set squeeze retainer at 3500' and squeeze with 30 sacks of cement. Then spot 5 sacks on top of retainer. Cement inside and outside 4 1/2 > 100'

Propose to perforate at 5650'. Then set squeeze retainer at 5600' and squeeze with 30 sacks of cement. Then spot 5 sacks of cement on top of retainer. Cement inside and outside 4 1/2 > 100'

Propose to set CIBP at 8100' and spot 25 sacks of cement on top. Cement inside 4 1/2" > 250'

Perforations 8484-8500'

CIBP set at 8800' above perforations 8822-8828'

4 1/2", 11.6 #, K55/N80 casing set at 9345'. Cemented with 475 sacks. TOC @ 7800' by Temp survey

MEASURED DEPTH (FT)

100.00
200.00
300.00
400.00
500.00
600.00
700.00
800.00
900.00
1,000.00
1,100.00
1,200.00
1,300.00
1,400.00
1,500.00
1,600.00
1,700.00
1,800.00
1,900.00
2,000.00
2,100.00
2,200.00
2,300.00
2,400.00
2,500.00
2,600.00
2,700.00
2,800.00
2,900.00
3,000.00
3,100.00
3,200.00
3,300.00
3,400.00
3,500.00
3,600.00
3,700.00
3,800.00
3,900.00
4,000.00
4,100.00
4,200.00
4,300.00
4,400.00
4,500.00
4,600.00
4,700.00
4,800.00
4,900.00
5,000.00
5,100.00
5,200.00
5,300.00
5,400.00
5,500.00
5,600.00
5,700.00
5,800.00
5,900.00
6,000.00
6,100.00
6,200.00
6,300.00
6,400.00
6,500.00
6,600.00
6,700.00
6,800.00
6,900.00
7,000.00
7,100.00
7,200.00
7,300.00
7,400.00
7,500.00
7,600.00
7,700.00
7,800.00
7,900.00
8,000.00
8,100.00
8,200.00
8,300.00
8,400.00
8,500.00
8,600.00
8,700.00
8,800.00
8,900.00
9,000.00
9,100.00
9,200.00
9,300.00
9,400.00
9,500.00

Glorieta, 2400

Yeno, 2673

Bone Spring, 3731

Wolkemp, 6116


Canyon, 7758

Starn, 8744

Atoka, 8733

Morrow, 8939

TD, 9345

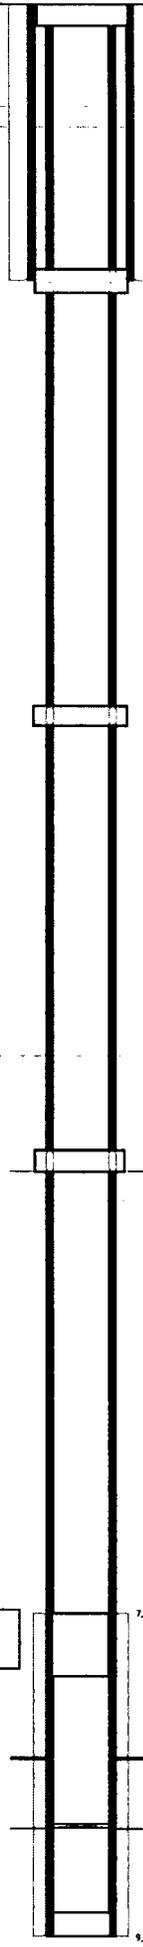

CONDITIONS FOR PLUGGING AND ABANDONMENT

District II / Artesia N.M.

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, **Notify NMOCD District Office II at (575)-748-1283 at least 24 hours before beginning work.**

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs.
2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
3. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
6. If the well is not plugged within 1
7. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
8. **Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.**
9. Produced water **will not** be used during any part of the plugging operation.
10. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
11. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
12. **Class 'C' cement will be used above 7500 feet.**
13. **Class 'H' cement will be used below 7500 feet.**
14. **A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged**
15. **All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing**

16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
17. **A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.**
18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, **(WOC 4 hrs and tag).**
19. **No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.**
20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
 - A) Fusselman
 - B) Devonian
 - C) Morrow
 - D) Wolfcamp
 - E) Bone Springs
 - F) Delaware
 - G) Any salt sections
 - H) Abo
 - I) Glorieta
 - J) Yates.
 - K) **Potash---** (In the R-111-P Area (Potash Mine Area), a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, **WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.**
21. **If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing**

DRY HOLE MARKER REQUIREMENTS

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name 2. Lease and Well Number 3.API Number 4. Unit Letter 5. Quarter Section (feet from the North, South, East or West) 6. Section, Township and Range 7. Plugging Date 8. County (SPECIAL CASES)-----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)