

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

MAR 16 2020

FORM APPROVED  
OMB NO. 1004-0137  
Expires: January 31, 2018

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or recomplete an abandoned well. Use form 3160-3 (APD) for such proposals.*

EMERALD OGDARTESIA

5. Lease Serial No.  
NMMN138865  
6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE - Other instructions on page 2**

7. If Unit or CA/Agreement, Name and/or No.

1. Type of Well  
 Oil Well  Gas Well  Other

8. Well Name and No.  
BOROS FEDERAL 202H

2. Name of Operator Contact: NICKY FITZGERALD  
MATADOR PRODUCTION COMPANYE-Mail: nicky.fitzgerald@matadorresources.com

9. API Well No.  
30-015-46564-00-X1

3a. Address ONE LINCOLN CENTER 5400 LBJ FREEWAY SUITE  
DALLAS, TX 75240

3b. Phone No. (include area code)  
1500 972-371-5448

10. Field and Pool or Exploratory Area  
WOLFCAMP

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Sec 15 T26S R31E NENW 430FNL 1820FWL  
32.048824 N Lat, 103.768784 W Lon

11. County or Parish, State  
EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Change to Original A PD
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

BLM Bond No. NMB001079  
Surety Bond No. RLB0015172

Matador Resources respectfully requests the OPTION to amend the casing, cementing and mud program on the Boros Federal #202H (30-015-46564).

Please find supporting documentation attached and contact JD Harkrider at 972-629-2177 for any questions.

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #506617 verified by the BLM Well Information System  
For MATADOR PRODUCTION COMPANY, sent to the Carlsbad  
Committed to AFMSS for processing by DEBORAH HAM on 03/11/2020 (20DMH0119SE)

Name (Printed/Typed) JD HARKRIDER

Title DRILLING ENGINEER

Signature (Electronic Submission)

Date 03/10/2020

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By NDUNGU KAMAU

Title PETROLEUM ENGINEER

Date 03/12/2020

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Carlsbad

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**\*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\***

Accepted  
RUP 3-25-20

## PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

<b>OPERATOR'S NAME:</b>	Matador Production Company
<b>LEASE NO.:</b>	NMNM138865
<b>WELL NAME &amp; NO.:</b>	Boros Federal 202H
<b>SURFACE HOLE FOOTAGE:</b>	430'/N & 1820'/W
<b>BOTTOM HOLE FOOTAGE:</b>	330'/S & 1651'/W
<b>LOCATION:</b>	Section 15, T.26 S., R.31 E., NMP
<b>COUNTY:</b>	Eddy County, New Mexico

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input type="radio"/> Multibowl	<input checked="" type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input type="checkbox"/> COM	<input type="checkbox"/> Unit

**All Previous COAs Still Apply.**

### A. CASING

1. The 13-3/8 inch surface casing shall be set at approximately **1381 feet** (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that

string.

2. The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:

**Option 1 (Single Stage):**

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

**Option 2:**

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
  - Cement to surface. If cement does not circulate, contact the appropriate BLM office.

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

**B. PRESSURE CONTROL**

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **10,000 (10M)** psi. **Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**

## 1. Casing & Cement

All casing will be API and new. See attached casing assumption worksheet.

String	Hole Size (in)	Set MD (ft)	Set TVD (ft)	Casing Size (in)	Wt. (lb/ft)	Grade	Joint	Collapse	Burst	Tension
Surface	17.5	0 - 1385	0 - 1385	13.375	54.5	J-55	BUTT	1.125	1.125	1.8
Intermediate 1 Top	9.875	0 - 9500	0 - 9467	7.625	29.7	P-110	BUTT	1.125	1.125	1.8
Intermediate 1 Bottom	9.875 or 8.75	9500 - 10840	9467 - 10807	7.625	29.7	P-110	BUTT or VAM HTFNR	1.125	1.125	1.8
Production	6.75	0 - 21607	0 - 11434	5.5	20	P-110	Hunting TLWSC	1.125	1.125	1.8

- All casing strings will be tested in accordance with Onshore Order #2 - III.B.1.h
- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed
- All non-API joint connections will be of like or greater quality, and as run specification sheets will be on location for review
- 9-7/8" hole depth may fluctuate, but 7-5/8" BUTT will only be run inside of 9-7/8" OH and Flush joint will be run in 8-3/4" OH. Cement volumes will be adjusted proportionally. Option to drill the entire Intermediate I hole section in 9-7/8" hole size.
- A variance is requested to wave the centralizer requirement for the 7-5/8" flush casing in the 8-3/4" hole and 5-1/2" SF/Flush casing in the 6-3/4" hole


String	Type	Sacks	Yield	Weight	Percent Excess	Top of Cement (ft)	Class	Blend
Surface	Lead	510	2.21	12.4	50%	0	C	Class C Cement + 1% Calcium Chloride + LCM
	Tail	266	1.32	14.8	50%	1085	C	Class C Cement + LCM
Intermediate 1 DV ~4,150'	Lead	276	5.57	10.2	30%	0	A/C	Stage 2: Tuned Light Blend
	Lead	276	5.57	10.2	30%	4150	A/C	Stage 1: Tuned Light Blend
	Tail	114	1.367	13.5	30%	9840	A/C	Stage 1: Class A/C + LCM
Intermediate 1 Alternate Design	Lead	552	5.57	10.2	30%	0	A/C	Tuned Light Blend
	Tail	114	1.367	13.5	30%	9840	A/C	Class A/C + LCM
	Tail	1000	1.468	14.2	30%	0	C	Bradenhead Contingency: Class C Cement + LCM
Production	Tail	744	1.37	13.5	10%	200' Tie-Back	H	Fluid Loss + Dispersant + Retarder + LCM

- If a DV tool is used, depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above the current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

## 2. Mud Program

An electronic Pason mud monitoring system complying with Onshore Order 2 will be used. All necessary mud products (barite, bentonite, LCM) for weight addition and fluid loss control will be on location at all times. Mud program is subject to change due to hole conditions.

Hole Section	Mud Type	Depth From	Depth To	Density (lb/gal)	Viscosity	Fluid Loss
Surface	Spud Mud	0	Surf Shoe	8.4 - 8.8	28-30	NC
Intermediate 1	Brine Diesel Emulsion	Surf Casing Shoe	7-5/8" Shoe	8.4 - 9.4	28-30	NC
Production	OBM	7-5/8' Shoe	Lateral TD	11.0 - 12.5	30-35	<20

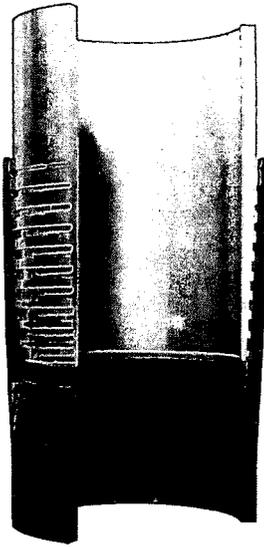

# TEC-LOCK WEDGE

5.500" 20 LB/FT (.361"Wall) with 5.875" SPECIAL CLEARANCE OD  
BEN P110 CY

## Pipe Body Data

Nominal OD:	5.500	in
Nominal Wall:	.361	in
Nominal Weight:	20.00	lb/ft
Plain End Weight:	19.83	lb/ft
Material Grade:	P110 CY	
Mill/Specification:	BEN	
Yield Strength:	125,000	psi
Tensile Strength:	135,000	psi
Nominal ID:	4.778	in
API Drift Diameter:	4.653	in
Special Drift Diameter:	None	in
RBW:	87.5 %	
Body Yield:	729,000	lbf
Burst:	14,360	psi
Collapse:	13,010	psi

## Connection Data

Standard OD:	5.875	in
Pin Bored ID:	4.778	in
Critical Section Area:	5.656	in <sup>2</sup>
Tensile Efficiency:	97 %	
Compressive Efficiency:	100 %	
Longitudinal Yield Strength:	707,000	lbf
Compressive Limit:	729,000	lbf
Internal Pressure Rating:	14,360	psi
External Pressure Rating:	13,010	psi
Maximum Bend:	101.2	°/100ft

## Operational Data

Minimum Makeup Torque:	15,000	ft*lbf
Optimum Makeup Torque:	18,700	ft*lbf
Maximum Makeup Torque:	41,200	ft*lbf
Minimum Yield:	45,800	ft*lbf
Makeup Loss:	5.97	in

**Notes** Operational Torque is equivalent to the Maximum Make-Up Torque



**Revisions to Operator-Submitted EC Data for Sundry Notice #506617**

	<b>Operator Submitted</b>	<b>BLM Revised (AFMSS)</b>
Sundry Type:	APDCH NOI	APDCH NOI
Lease:	NMNM138865	NMNM138865
Agreement:		
Operator:	MATADOR PRODUCTION COMPANY 5400 LBJ FREEWAY, SUITE 1500 DALLAS, TX 75240 Ph: 972-371-5448	MATADOR PRODUCTION COMPANY ONE LINCOLN CENTER 5400 LBJ FREEWAY SUITE 1500 DALLAS, TX 75240 Ph: 972.371.5200
Admin Contact:	NICKY FITZGERALD REGULATORY ANALYST E-Mail: nicky.fitzgerald@matadorresources.com  Ph: 972-371-5448	NICKY FITZGERALD REGULATORY ANALYST E-Mail: nicky.fitzgerald@matadorresources.com  Ph: 972-371-5448
Tech Contact:	JD HARKRIDER DRILLING ENGINEER E-Mail: jharkrider@matadorresources.com  Ph: 972-629-2177	JD HARKRIDER DRILLING ENGINEER E-Mail: jharkrider@matadorresources.com  Ph: 972-629-2177
Location:		
State:	NM	NM
County:	EDDY	EDDY
Field/Pool:	PURPLE SAGE;WOLFCAMP(GAS)	WOLFCAMP
Well/Facility:	BOROS FEDERAL 202H Sec 15 T26S R31E 430FNL 1820FWL 32.048823 N Lat, 103.768783 W Lon	BOROS FEDERAL 202H Sec 15 T26S R31E NENW 430FNL 1820FWL 32.048824 N Lat, 103.768784 W Lon