

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

S OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-22293
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Nickson BM
8. Well Number 4
9. OGRID Number 025575
10. Pool name or Wildcat Penasco Draw San Andres Yeso

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 S. 4th Street, Artesia, NM 88210


4. Well Location
Unit Letter L : 1650 feet from the South line and 330 feet from the West line
Section 30 Township 18S Range 26E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3445'GR

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____

Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____



12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL. <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. Rig up all safety equipment as needed. POOH with TAC, S/N, perf sub, mud joint with bull plug and all but 1077' of tubing.
2. RIH with gauge ring and junk basket to +/-1410'.
3. Set a 4-1/2" CIBP at 1400' with 35' cement on top.
4. Spot 100' cement plug (25 sx) across the shoe from 1077'-1177'. Tag plug.
5. Spot 100' cement plug (25 sx) across the shoe from 387'-487'. Tag plug.
6. Spot 100' cement plug (25 sx) from 100' to surface. Tag plug.
7. Cut off wellhead and install dry hole marker as per regulated.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

**Notify OCD 24 hrs. prior
To any work done.**

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOC guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE February 16, 2007

Type or print name Tina Huerta E-mail address: tinah@ypcnm.com Telephone No. 505-748-1471

For State Use Only
APPROVED BY: [Signature] TITLE FED Reg DATE 2/22/07
Conditions of Approval (if any):

WELL NAME: Nickson BM #4

FIELD:

LOCATION: 1,650' FSL & 330' FWL of Section 30-18S-26E

Eddy Co., NM

GL: 3,445'

ZERO:

KB:

3,458'

SPUD DATE:

COMPLETION DATE:

COMMENTS: API No.: 30-015-222930

CASING PROGRAM

10-3/4" 40# J55	<u>437'</u>
7" 20# J55	<u>1,127'</u>
5-1/2" 14# J55	0-983'
4-1/2" 9.5# J55	983-1,545' <u>1,545'</u>

15" Hole

9-1/2" Hole

6-1/4" Hole

10-3/4" @ 437' w/ 300 sx
(Circ)

5-1/2" to 983'
4-1/2" from 983-1545'

7" @ 1,127' w/400 sx (Circ, fell
back. Filled with 1-1/2 yd
ready mix)

SA Yeso perms: 1,460-1,504; 2,296'; 2,305'

5-1/2" to 983' then finished with
4-1/2" from 983-1545' w/150 sx
(Circ)

Before

TOPS

SA

756'

Not to Scale
1/27/06
DC/Hill

Not to Scale

1/27/06


DC/Hill

PBTD: 1,545'
TD: 1,550'

WELL NAME: Nickson BM #4 FIELD: _____
 LOCATION: 1,650' FSL & 330' FWL of Section 30-18S-26E Eddy Co., NM
 GL: 3,445' ZERO: _____ KB: 3,458' _____
 SPUD DATE: _____ COMPLETION DATE: _____
 COMMENTS: API No.: 30-015-222930 _____

CASING PROGRAM

10-3/4" 40# J55	437'
7" 20# J55	1,127'
5-1/2" 14# J55 0-983'	
4-1/2" 9.5# J55 983-1,545'	1,545'

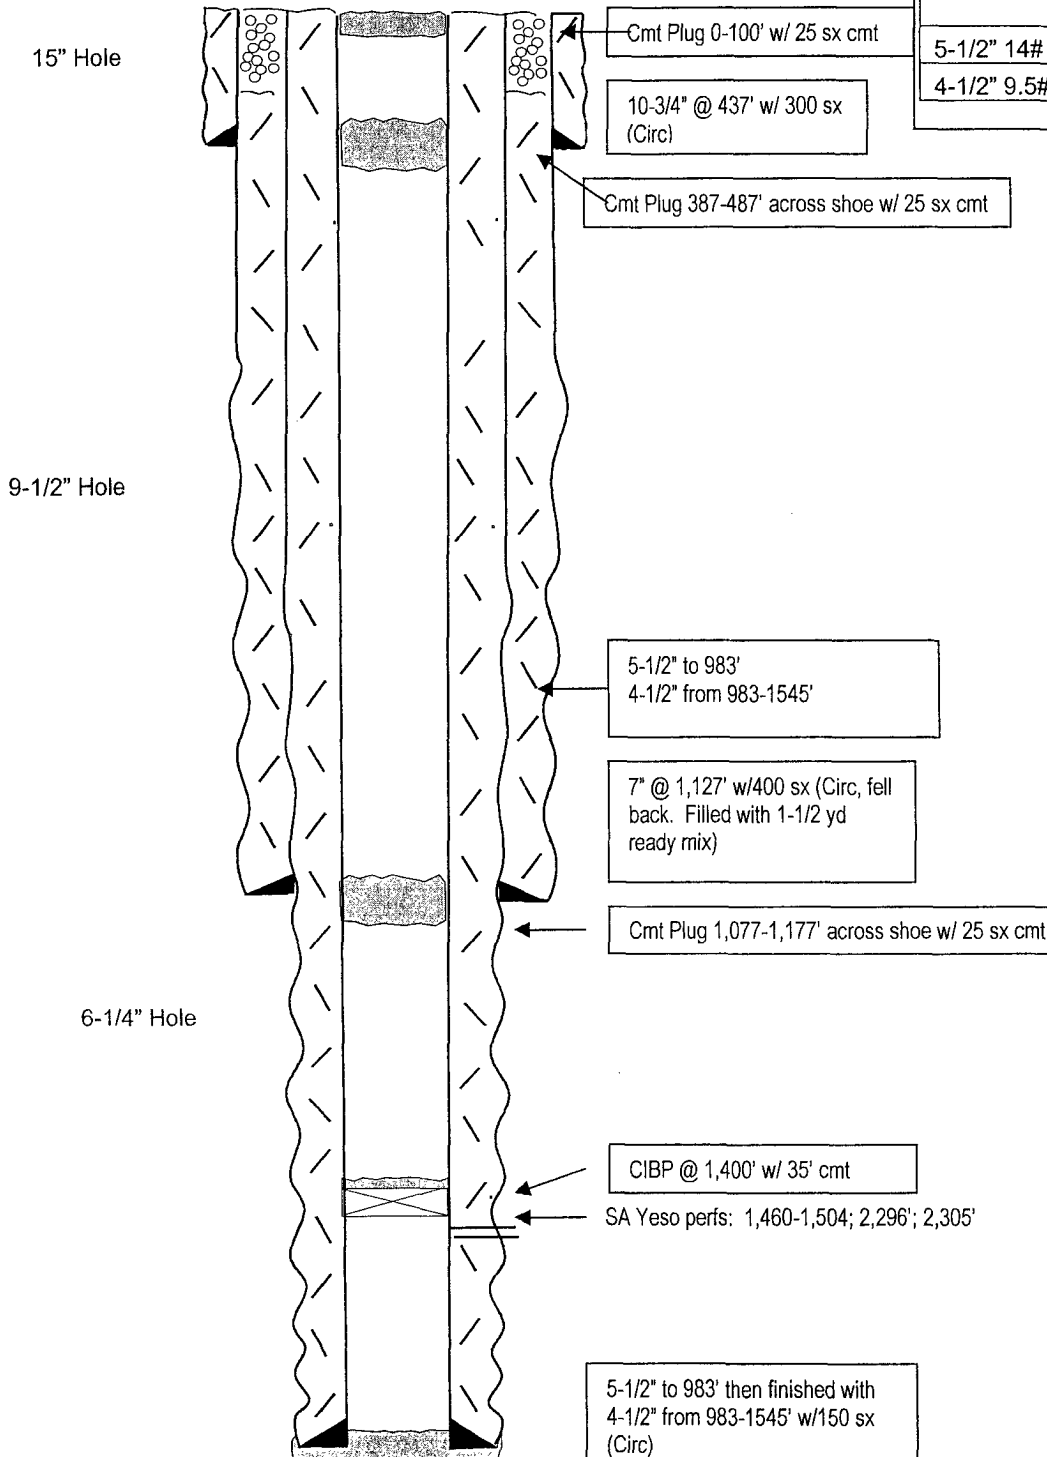

After

TOPS

SA

756'

Not to Scale

1/27/06
DC/Hill

PBTD: 1,545'
TD: 1,550'