



OCD-ARTESIA

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SEP 20 2007

FORM APPROVED
OMB No 1004-0137
Expires March 31, 2007

ATS-07-369
EA-07-1203

called operator
8-2-07 dm

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a Type of work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5 Lease Serial No (SL) 100844, (BHL) 1095630
1b Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6 If Indian, Allottee or Tribe Name N/A
2 Name of Operator COG Operating, LLC- 229137		7 If Unit or CA Agreement, Name and No N/A
3a Address 550 W. Texas Ave., Suite 1300 Midland, TX 79701		8 Lease Name and Well No Comet "22" Federal #2
3b Phone No. (include area code) 432-685-9158		9 API Well No 30-015-35818
4 Location of Well (Report location clearly and in accordance with any State requirements *) At surface 1980' FSL & 330' FWL, Unit L At proposed prod zone 1980' FSL & 330' FEL, Unit I		10 Field and Pool, or Exploratory Crow Flats Wolfcamp
14 Distance in miles and direction from nearest town or post office* Approx. 13 Northwest from Loco Hills, NM		11 Sec, T R M or Blk and Survey or Area Section 22, T16S, R28E
15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drg unit line, if any) 330'	16 No of acres in lease 920	17 Spacing Unit dedicated to this well 160
18 Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft 1320'	19 Proposed Depth 6800' TVD, 11,150' MD	20 BLM/BIA Bond No on file NMB 000215
21 Elevations (Show whether DF, KDB, RT, GL, etc) 3605' GL	22 Approximate date work will start* 09/15/2007	23 Estimated duration 45 Days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, must be attached to this form

- | | |
|--|---|
| 1 Well plat certified by a registered surveyor | 4 Bond to cover the operations unless covered by an existing bond on file (see Item 20 above) |
| 2 A Drilling Plan | 5 Operator certification |
| 3 A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office) | 6 Such other site specific information and/or plans as may be required by the BLM |

25 Signature 	Name (Printed/Typed) Dwaine Moore	Date 07/27/2007
Title Agent For COG Operating, LLC		
Approved by (Signature) /s/ James Stovall	Name (Printed/Typed) /s/ James Stovall	Date SEP 18 2007
Title FIELD MANAGER		Office CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon
Conditions of approval, if any, are attached

APPROVAL FOR TWO YEARS

Title 18 USC Section 1001 and Title 43 USC Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

*(Instructions on page 2)

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

If earthen pits are used in association with the drilling of this well, an OCD pit permit must be obtained prior to pit construction.

**APPROVAL SUBJECT TO
GENERAL REQUIREMENTS
AND SPECIAL STIPULATIONS
ATTACHED**

Roswell Controlled Water Basin

**Witness Surface &
Intermediate Casing**

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240

DISTRICT II
1301 W. Grand Avenue, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised October 12, 2005

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code 97102	Pool Name Crow Flats Wolfcamp
Property Code 36629	Property Name COMET "22" FEDERAL	Well Number 2
OGRID No. 829137	Operator Name C.O.G. OPERATING L.L.C.	Elevation 3605'

Surface Location

UL or lot No. L	Section 22	Township 16 S	Range 28 E	Lot Idn	Feet from the 1980	North/South line SOUTH	Feet from the 330	East/West line WEST	County EDDY
--------------------	---------------	------------------	---------------	---------	-----------------------	---------------------------	----------------------	------------------------	----------------

Bottom Hole Location If Different From Surface

UL or lot No. I	Section 22	Township 16 S	Range 28 E	Lot Idn	Feet from the 1980	North/South line SOUTH	Feet from the 330	East/West line EAST	County EDDY
--------------------	---------------	------------------	---------------	---------	-----------------------	---------------------------	----------------------	------------------------	----------------

Dedicated Acres 160	Joint or Infill	Consolidation Code	Order No.
------------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature: [Signature] Date: 7/25/07 Dwaine Moore Agent For COG Printed Name: COG	
	SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date Surveyed: APRIL 11, 2007 Signature: [Signature] Professional Surveyor: 909 Certificate No. Gary L. Jones 7977 BASIN SURVEYS	

STATEMENT ACCEPTING RESPONSIBILITY FOR OPERATIONS

C.O.G. Operating, LLC (229137)
550 W. Texas Avenue, Ste. 1300
Midland, TX 79701

The undersigned accepts all applicable terms, conditions, stipulations and restrictions covering operations conducted on the leased land or portion thereof, as described below:

Lease No:

NM
NMLC # 100844
NMLC # 095630 - called operator 8-2-07 DM
NM

Well Name:

Comet "22" Federal #2

Legal Description of Land:

SL: 1980' FSL & 330' FWL, Unit L
BHL: 1980' FSL & 330' FEL, Unit I
Section 22, T16S, R28E
Eddy County, NM

Formation(s) (if applicable):

Crows Flat Wolfcamp (#97102)

Bond Coverage:

\$25,000 statewide bond of C.O.G. Operating, LLC

BLM Bond File No:

NMB 000215

7-29-07

Date



John Coffman
C.O.G. Operating, LLC

1. Proration Unit Spacing: 160 Acres
2. Ground Elevation: 3605'
3. Proposed Depths: TVD = 6800', MD = 11150'
4. Estimated tops of geological markers:

5 Possible mineral bearing formations:

6. Casing Program

<u>Hole size</u>	<u>Interval</u>	<u>OD of Casing</u>	<u>Weight</u>	<u>Cond</u>	<u>Collar</u>	<u>Grade</u>
17-1/2"	0' - +/-500'	13-3/8"	48#	New	STC	H40
Collapse sf - 2.98, Burst sf – 2.33, Tension sf – 13.42						
12 1/4"	0' - 1800'	9-5/8"	40#	New	STC	J-55
Collapse sf - 2. 86, Burst sf – 1.42, Tension sf – 7 22						
8-3/4"	0' – 6000'MD	5-1/2"	17#	New	LTC	L-80
Collapse sf - 2. 08, Burst sf – 2.35, Tension sf – 2.92						
7-7/8"	6000' – 11150'MD	5-1/2"	17#	New	BTC	L-80
Collapse sf – 1.85, Burst sf – 2.28, Tension sf – 29.19						

ATTACHMENT TO FORM 3160-3
COG Operating
Comet "22" Federal # 2
Page 2 of 3

7 Cement Program

13 3/8" Surface Casing Set at +/- 500'. Circulate to Surface with Class "C" w/ 2% CaCl₂

9 5/8" Intermediate Set at +/- 1800'. Circulate to Surface with Class "C" w/ 2% CaCl₂.

COA 5 1/2" Production Set at +/- 11150' MD. Cement casing with 200 sx. 50/50/2 "C" & 650 sx Class "H" Est. TOC @ 5000'.

8. Pressure Control Equipment:

After setting 13 3/8" casing and installing 3000 psi casing head, NU 13 5/8" 3000 psi annular BOP. Test annular BOP, casing and manifold with clear fluid to 1000 psi w/ rig pump

After setting 9 5/8" casing and installing 3000 psi casing spool, NU 3000 psi double ram BOP and 3000 psi annular BOP. Test double ram BOP and manifold to 3000# with clear fluid and annular to 1500 psi using an independent tester, this equipment will be used continuously until TD is reached. Blind rams will be operationally checked on each trip out of hole. Pipe rams will be operationally checked each 24 hour period These checks will be noted on daily tour sheets. Other accessories to the BOP equipment include a Kelly cock and floor safety valves, choke lines and choke manifold with 3000 psi WP rating.

9. Proposed Mud Circulating System

Interval	Mud Wt.	Visc.	FL	Type Mud System
0' - 500'	8.5	28	NC	Fresh water native mud w/ paper for seepage and sweeps. Lime for PH.
500'- 1800'	9.1	30	NC	Cut brine mud, lime for PH and paper for seepage and sweeps
1800'- 6000'	9.1	29	NC	Drill section with fresh water/cut brine circulating the reserve utilizing periodic sweeps of paper as needed for seepage control and solids removal.
6000' - 11150'	9.5	36	10	Drill horizontal section with XCD polymer / cut brine / starch.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the well site at all times.

10. Production Hole Drilling Summary:

Drill 8-3/4" hole thru Wolfcamp, run open hole logs. Spot 150 sx. "H" Kick off plug from +/- 6300' to +/- 5900'. Time drill and kick off 7-7/8" hole at +/- 6000', building curve over +/- 575' to horizontal at 6550' TVD. Drill horizontal section in an easterly direction for +/-4500' lateral. Run production casing and cement

ATTACHMENT TO FORM 3160-3
COG Operating
Comet "22" Federal # 2
Page 3 of 3

11. Auxiliary Well Control and Monitoring Equipment

- A. Kelly cock will be kept in the drill string at all times
- B. A full opening drill pipe-stabbing valve with proper drill pipe connections will be on the rig floor at all times.

12. Logging, Testing and Coring Program:

- A. The electric logging program will consist of GR-Dual Laterolog, Spectral Density, Dual Spaced Neutron, CSNG Log and will be ran from T D to 9 5/8" casing shoe.
- B. Drill Stem test is not anticipated.
- C. No conventional coring is anticipated.
- D. Further testing procedures will be determined after the 5 1/2" production casing has been cemented at TD based on drill shows and log evaluation.

13. Abnormal Conditions, Pressures, Temperatures and Potential Hazards:

No abnormal pressures or temperatures are anticipated. The estimated bottom hole at TD is 110 degrees and estimated maximum bottom hole pressure is 2945 psig. Low levels of Hydrogen sulfide have been monitored in producing wells in the area, so H2S may be present while drilling of the well. An H2S plan is attached to the Drilling Program. No major loss of circulation zones has been reported in offsetting wells.

14. Anticipated Starting Date

Drilling operations will commence approximately on August 15 2007 with drilling and completion operations lasting approximately 45 days.


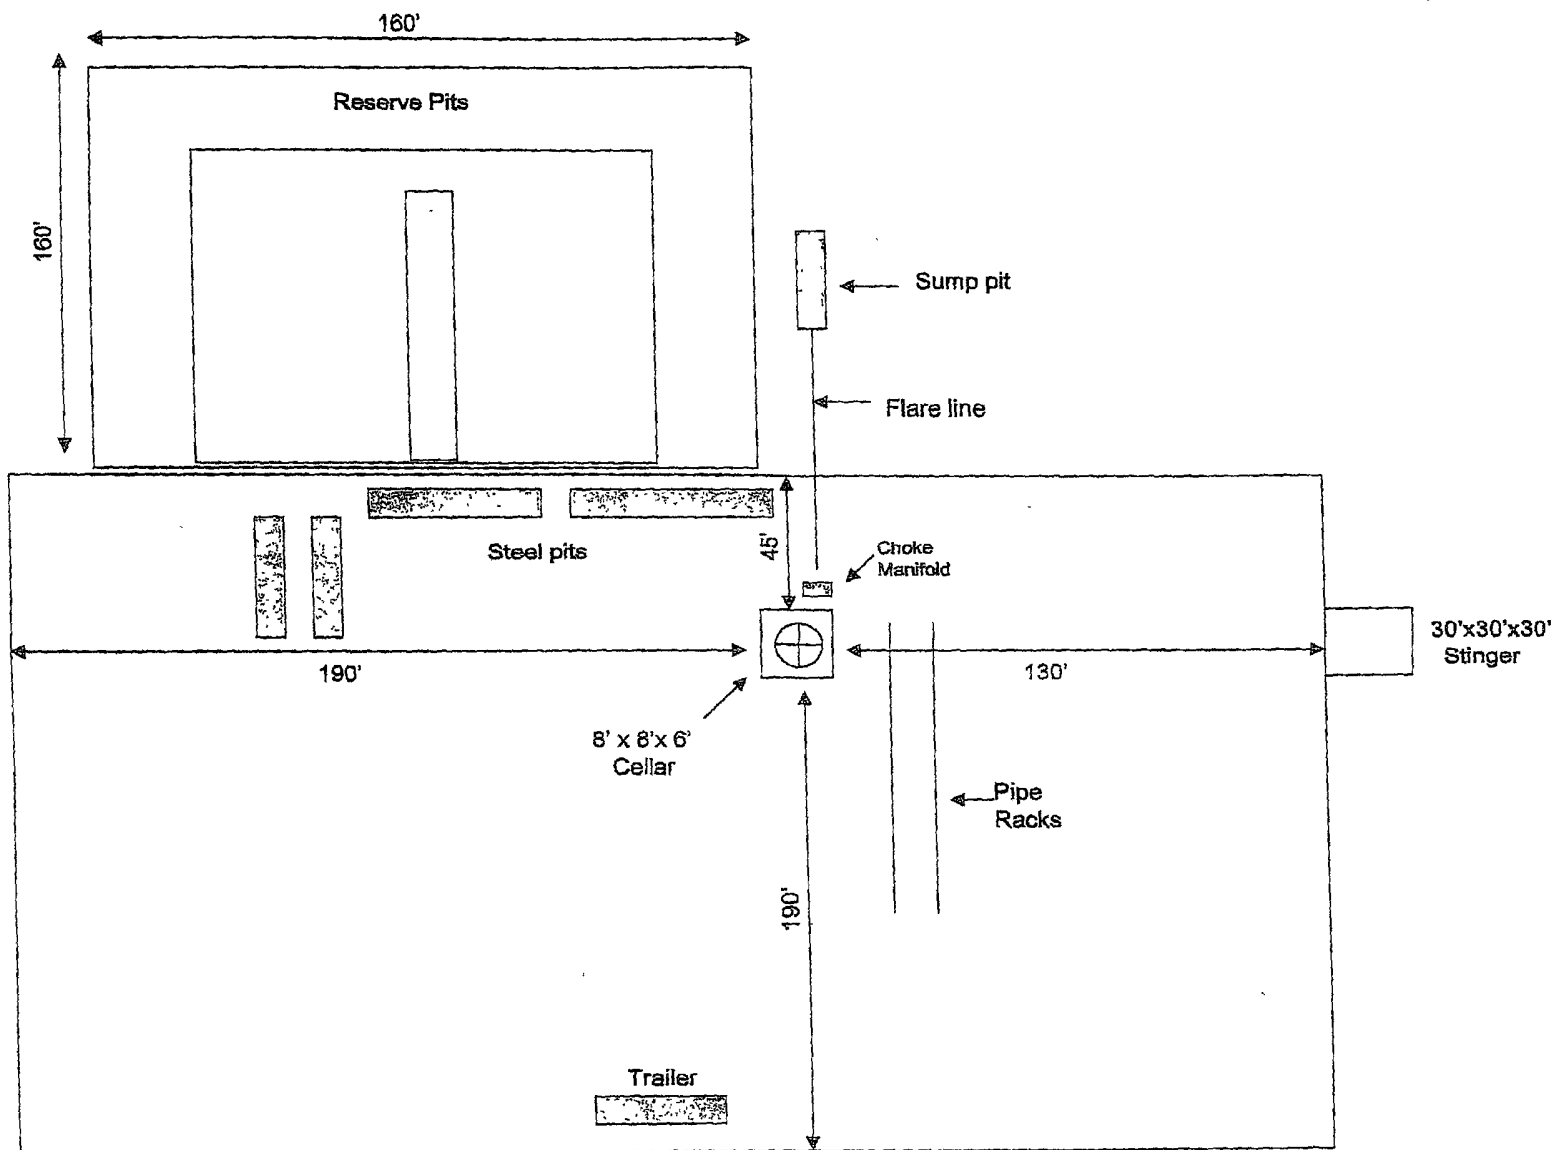


Exhibit "F"

*See Alpha
Pile Chart
V-Road North*


Exhibit "G"

BOPE SCHEMATIC

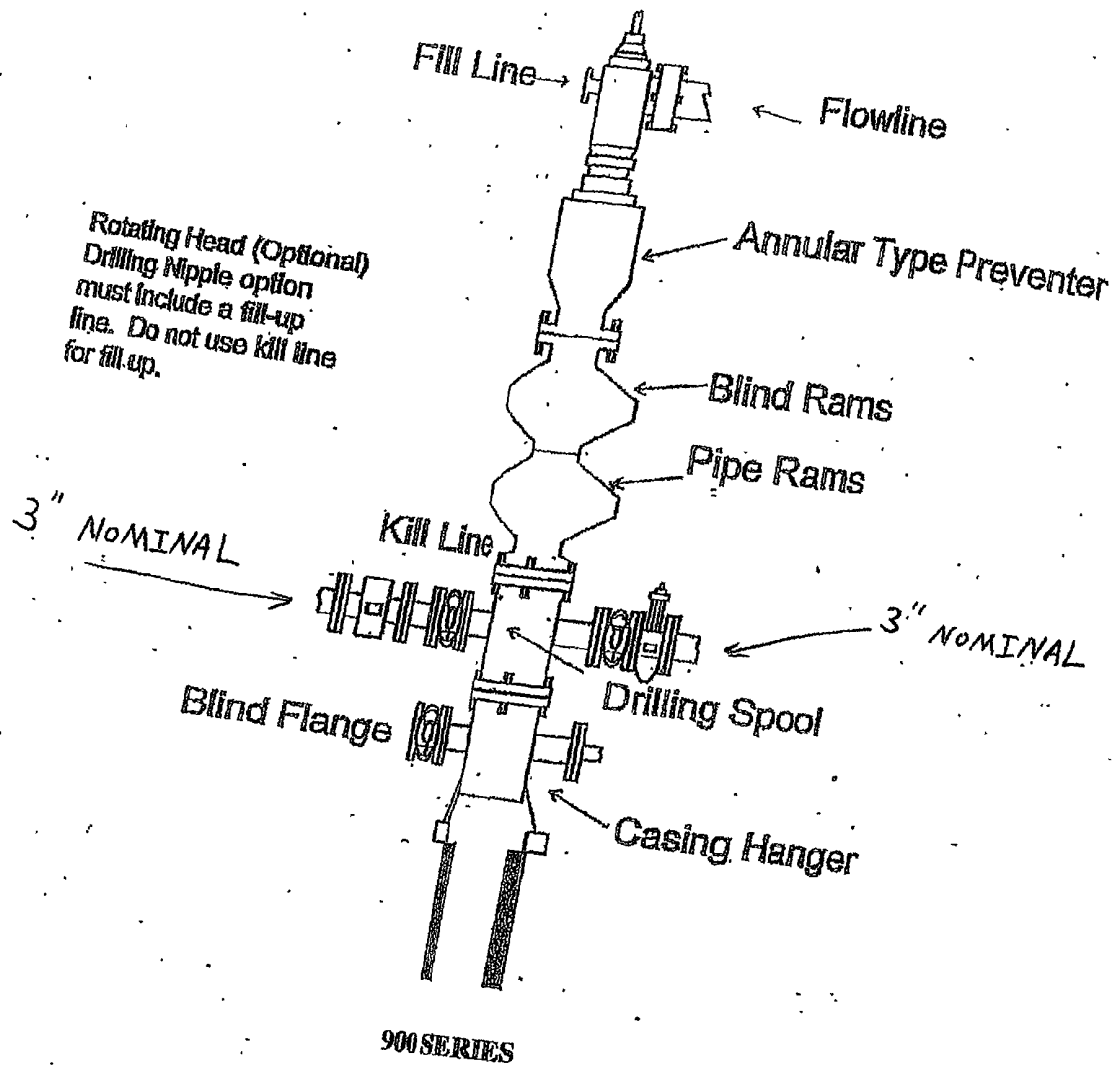

CHOKE MANIFOLD

3M SERVICE

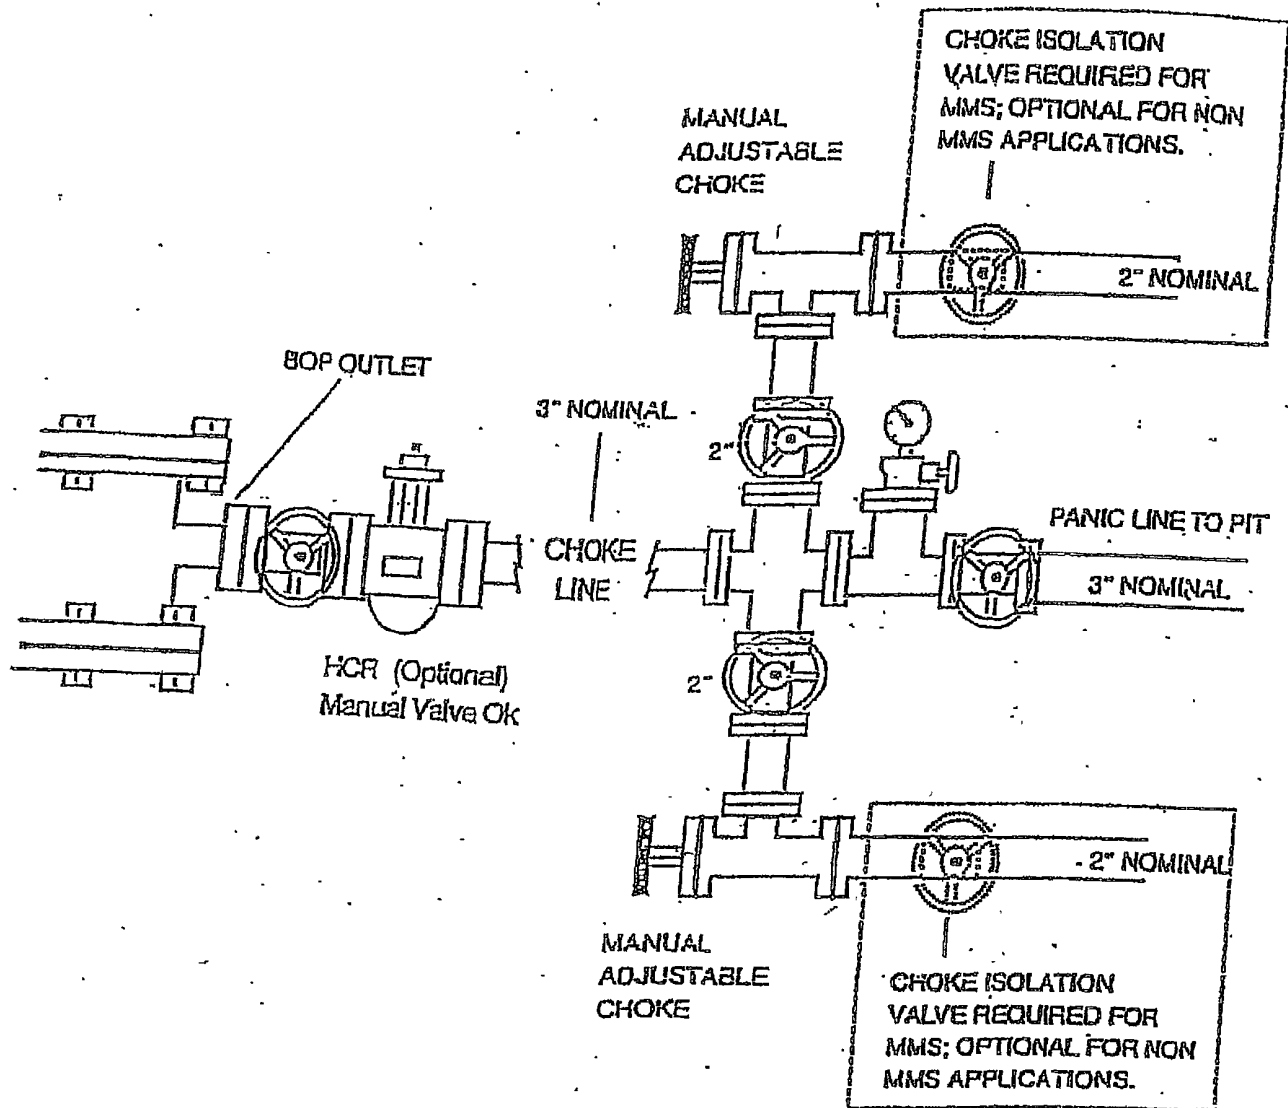

Planned Wellpath Report

Plan #1
Page 1 of 4



INTEQ

REFERENCE WELLPATH IDENTIFICATION			
Operator	Concho O&G	Slot	#2_SHL
Area	Eddy County, NM	Well	#2
Field	Section 22 T16S R28E (Comet)	Wellbore	#2_PWB
Facility	Comet 22 Federal #2		

REPORT SETUP INFORMATION			
Projection System	NAD83 / TM New Mexico State Planes, Eastern Zone (3001), US feet	Software System	WellArchitect™ 1.2
North Reference	Grid	User	Gomeoscr
Scale	0.999912	Report Generated	08/07/07 at 16:18:43
Wellbore last revised	08/07/07	Database/Source file	WA_Midland/#2_PWB.xml

WELLPATH LOCATION						
	Local coordinates		Grid coordinates		Geographic coordinates	
	North [feet]	East [feet]	Easting [US feet]	Northing [US feet]	Latitude [°]	Longitude [°]
Slot Location	0.00	0.00	591056.10	693379.18	32 54 21.639N	104 10 16.793W
Facility Reference Pt			591056.10	693379.18	32 54 21.639N	104 10 16.793W
Field Reference Pt			591052.32	692055.85	32 54 08.544N	104 10 16.861W

WELLPATH DATUM			
Calculation method	Minimum curvature	Rig on #2_SHL (RT) to Facility Vertical Datum	0.00 feet
Horizontal Reference Pt	Facility Center	Rig on #2_SHL (RT) to GRN ELEV.	3605.00 feet
Vertical Reference Pt	Rig on #2_SHL (RT)	Facility Vertical Datum to Mud Line (Facility)	0.00 feet
MD Reference Pt	Rig on #2_SHL (RT)	Section Origin	N 0.00, E 0.00 ft
Field Vertical Reference	GRN. ELEV.	Section Azimuth	85.74°

RECEIVED
2007 AUG -9 PM 1:21
BUREAU OF LAND MGMT
OFFICE OF THE CHIEF

Planned Wellpath Report

Plan #1
Page 2 of 4



INTEQ

REFERENCE WELLPATH IDENTIFICATION			
Operator	Concho O&G	Slot	#2 SHL
Area	Eddy County, NM	Well	#2
Field	Section 22 T16S R28E (Comet)	Wellbore	#2 PWB
Facility	Comet 22 Federal #2		

WELLPATH DATA (59 stations) † = interpolated/extrapolated station									
MD [feet]	Inclination [°]	Azimuth [°]	TVD [feet]	Vert Sect [feet]	North [feet]	East [feet]	DLS [°/100ft]	Design Comments	Path Comment
0.00	0.000	85.737	0.00	0.00	0.00	0.00	0.00	Tie On	
390.00†	0.000	85.737	390.00	0.00	0.00	0.00	0.00		Yates
1020.00†	0.000	85.737	1020.00	0.00	0.00	0.00	0.00		Queen
1950.00†	0.000	85.737	1950.00	0.00	0.00	0.00	0.00		San Andres
3370.00†	0.000	85.737	3370.00	0.00	0.00	0.00	0.00		Glorieta
5400.00†	0.000	0.000	5400.00	0.00	0.00	0.00	0.00		Abo
6230.00	0.000	85.737	6230.00	0.00	0.00	0.00	0.00	KOP	
6330.00†	10.050	85.737	6329.49	8.75	0.65	8.72	10.05		
6430.00†	20.100	85.737	6425.92	34.72	2.58	34.63	10.05		
6530.00†	30.150	85.737	6516.35	77.13	5.73	76.91	10.05		
6569.76†	34.146	85.737	6550.00	98.28	7.31	98.01	10.05		Wolfcamp
6630.00†	40.200	85.737	6597.98	134.66	10.01	134.29	10.05		
6730.00†	50.250	85.737	6668.32	205.56	15.28	204.99	10.05		
6830.00†	60.300	85.737	6725.21	287.64	21.38	286.85	10.05		
6930.00†	70.350	85.737	6766.91	378.40	28.13	377.35	10.05		
7030.00†	80.400	85.737	6792.12	475.03	35.31	473.72	10.05		
7125.54	90.002	85.737	6800.11	570.12	42.38	568.55	10.05	EOC	
7130.00†	90.002	85.737	6800.11	574.58	42.71	573.00	0.00		
7230.00†	90.002	85.737	6800.10	674.58	50.14	672.72	0.00		
7330.00†	90.002	85.737	6800.10	774.58	57.58	772.44	0.00		
7430.00†	90.002	85.737	6800.10	874.58	65.01	872.17	0.00		
7530.00†	90.002	85.737	6800.10	974.58	72.44	971.89	0.00		
7630.00†	90.002	85.737	6800.09	1074.58	79.87	1071.61	0.00		
7730.00†	90.002	85.737	6800.09	1174.58	87.31	1171.34	0.00		
7830.00†	90.002	85.737	6800.09	1274.58	94.74	1271.06	0.00		

Planned Wellpath Report

Plan #1
Page 3 of 4



INTEQ

REFERENCE WELLPATH IDENTIFICATION			
Operator	Concho O&G	Slot	#2 SHL
Area	Eddy County, NM	Well	#2
Field	Section 22 T16S R28E (Comet)	Wellbore	#2 PWB
Facility	Comet 22 Federal #2		

WELLPATH DATA (59 stations) † = interpolated/extrapolated station									
MD [feet]	Inclination [°]	Azimuth [°]	TVD [feet]	Vert Sect [feet]	North [feet]	East [feet]	DLS [°/100ft]	Design Comments	Path Comment
7930.00†	90.002	85.737	6800.09	1374.58	102.17	1370.78	0.00		
8030.00†	90.002	85.737	6800.08	1474.58	109.61	1470.51	0.00		
8130.00†	90.002	85.737	6800.08	1574.58	117.04	1570.23	0.00		
8230.00†	90.002	85.737	6800.08	1674.58	124.47	1669.95	0.00		
8330.00†	90.002	85.737	6800.08	1774.58	131.91	1769.68	0.00		
8430.00†	90.002	85.737	6800.07	1874.58	139.34	1869.40	0.00		
8530.00†	90.002	85.737	6800.07	1974.58	146.77	1969.12	0.00		
8630.00†	90.002	85.737	6800.07	2074.58	154.21	2068.85	0.00		
8730.00†	90.002	85.737	6800.06	2174.58	161.64	2168.57	0.00		
8830.00†	90.002	85.737	6800.06	2274.58	169.07	2268.29	0.00		
8930.00†	90.002	85.737	6800.06	2374.58	176.50	2368.02	0.00		
9030.00†	90.002	85.737	6800.06	2474.58	183.94	2467.74	0.00		
9130.00†	90.002	85.737	6800.05	2574.58	191.37	2567.46	0.00		
9230.00†	90.002	85.737	6800.05	2674.58	198.80	2667.19	0.00		
9330.00†	90.002	85.737	6800.05	2774.58	206.24	2766.91	0.00		
9430.00†	90.002	85.737	6800.05	2874.58	213.67	2866.63	0.00		
9530.00†	90.002	85.737	6800.04	2974.58	221.10	2966.36	0.00		
9630.00†	90.002	85.737	6800.04	3074.58	228.54	3066.08	0.00		
9730.00†	90.002	85.737	6800.04	3174.58	235.97	3165.80	0.00		
9830.00†	90.002	85.737	6800.04	3274.58	243.40	3265.53	0.00		
9930.00†	90.002	85.737	6800.03	3374.58	250.84	3365.25	0.00		
10030.00†	90.002	85.737	6800.03	3474.58	258.27	3464.97	0.00		
10130.00†	90.002	85.737	6800.03	3574.58	265.70	3564.70	0.00		
10230.00†	90.002	85.737	6800.02	3674.58	273.13	3664.42	0.00		
10330.00†	90.002	85.737	6800.02	3774.58	280.57	3764.14	0.00		

Planned Wellpath Report

Plan #1
Page 4 of 4



INTEQ

REFERENCE WELLPATH IDENTIFICATION			
Operator	Concho O&G	Slot	#2 SHL
Area	Eddy County, NM	Well	#2
Field	Section 22 T16S R28E (Comet)	Wellbore	#2 PWB
Facility	Comet 22 Federal #2		

WELLPATH DATA (59 stations) † = interpolated/extrapolated station

MD [feet]	Inclination [°]	Azimuth [°]	TVD [feet]	Vert Sect [feet]	North [feet]	East [feet]	DLS [°/100ft]	Design Comments	Path Comment
10430.00†	90.002	85.737	6800.02	3874.58	288.00	3863.87	0.00		
10530.00†	90.002	85.737	6800.02	3974.58	295.43	3963.59	0.00		
10630.00†	90.002	85.737	6800.01	4074.58	302.87	4063.31	0.00		
10730.00†	90.002	85.737	6800.01	4174.58	310.30	4163.04	0.00		
10830.00†	90.002	85.737	6800.01	4274.58	317.73	4262.76	0.00		
10930.00†	90.002	85.737	6800.01	4374.58	325.17	4362.48	0.00		
11030.00†	90.002	85.737	6800.00	4474.58	332.60	4462.21	0.00		
11130.00†	90.002	85.737	6800.00	4574.58	340.03	4561.93	0.00		
11151.90	90.002	85.737	6800.00	4596.49	341.66	4583.77	0.00	#2 BHL	

HOLE & CASING SECTIONS Ref Wellbore: #2 PWB Ref Wellpath: Plan #1

String/Diameter	Start MD [feet]	End MD [feet]	Interval [feet]	Start TVD [feet]	End TVD [feet]	Start N/S [feet]	Start E/W [feet]	End N/S [feet]	End E/W [feet]
7.875in Open Hole	6230.00	11151.90	4921.90	6230.00	6800.00	0.00	0.00	341.66	4583.77

TARGETS

Name	MD [feet]	TVD [feet]	North [feet]	East [feet]	Grid East [us survey feet]	Grid North [us survey feet]	Latitude [°]	Longitude [°]	Shape
1) #2 BHL	11151.90	6800.00	341.66	4583.77	595639.46	693720.81	32 54 24.946N	104 09 23.023W	point

SURVEY PROGRAM Ref Wellbore: #2 PWB Ref Wellpath: Plan #1

Start MD [feet]	End MD [feet]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	11151.90	NaviTrak (Standard)		#2 PWB

Concho O&G

Location Eddy County, NM
Field Section 22 T16S R28E (Comet)
Facility Comet 22 Federal #2


Slot: #2 SHL
Well #2
Wellbore #2 PWB

**BAKER
HUGHES**
INTEQ

Well Profile Data

Design Comment	MD (ft)	Inc. (")	Az. (°)	TVD (ft)	Local N (ft)	Local E (ft)	DLS (°/100ft)	VS (ft)
Tie On	0.00	0.000	85.737	0.00	0.00	0.00	0.00	0.00
KOP	6230.00	0.000	85.737	6230.00	0.00	0.00	0.00	0.00
EOC	7125.54	90.002	85.737	6800.11	42.38	568.55	10.05	570.12
#2 SHL	11151.50	90.002	85.737	6800.00	341.66	4583.77	0.00	4596.49

Plot reference well path Plan #1	
True vertical depths are referenced to Rig on #2 SHL (RT)	Grid System: NAD83/TM New Mexico State Planes Eastern Zone (30011 US feet)
Measured depths are referenced to Rig on #2 SHL (RT)	North Reference: Grid north
Rig on #2 SHL (RT) to GRN ELEV 3805 feet	Local True distance
GRN ELEV to Measured (Facility Comet 22 Federal #2) -3805 feet	Depth error in feet
Coordinates are in feet referenced to Facility Center	Created by: gmcmscrn 5/7/00*

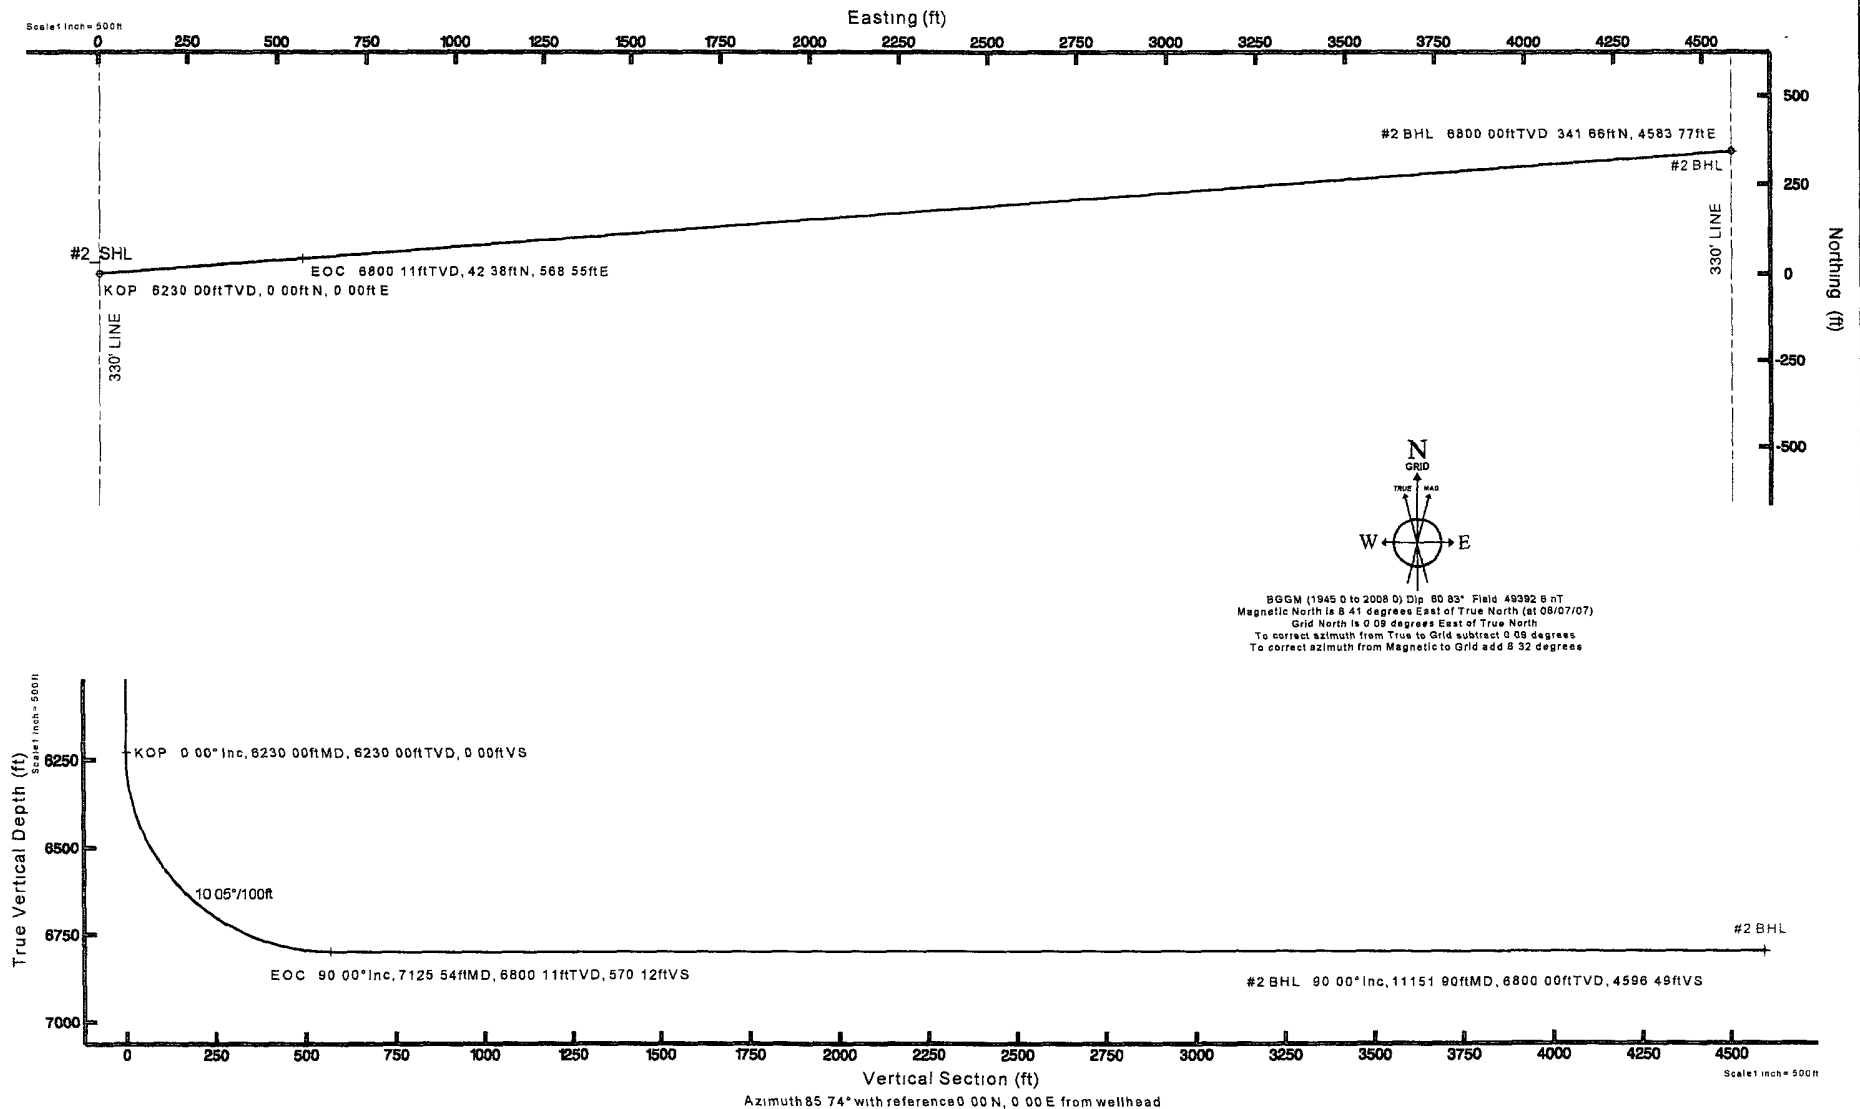

PROPOSED WELLPATH REPORT (CSV version)

Prepared by Baker Hughes INTEQ

Software System: WellArchitect™1.2

REFERENCE WELLPATH IDENTIFICATION

Operator Concho O&G
Area Eddy County, NM
Field Section 22 T16S R28E (Comet)
Facility Comet 22 Federal #2
Slot #2_SHL
Well #2
Wellbore #2 PWB
Wellpath Plan #1
Sidetrack (none)

REPORT SETUP INFORMATION

Projection : NAD83 / TM New Mexico State Planes, Eastern Zone (3001), US feet

North Refe Grid

Scale 0.999912

Wellbore L 8/7/2007

Software S WellArchitect™

User Gomeoscr

Report Gen 08/07/07 at 16:19:40

DataBase/ WA_Midland/ev01.xml

WELLPATH	Local North [ft]	Local East [ft]	Grid East [ft]	Grid North [ft]	Latitude [°]	Longitude [°]
Slot Location	0	0	591056.1	693379.2	32 54 21.6	104 10 16.793W
Facility Ref			591056.1	693379.2	32 54 21.6	104 10 16.793W
Field Refer			591052.3	692055.9	32 54 08.5	104 10 16.861W

WELLPATH DATUM

Calculation Minimum curvature

Horizontal Facility Center

Vertical Re Rig on #2_SHL (RT)

MD Refere Rig on #2_SHL (RT)

Field Vertic GRN. ELEV.

Rig on #2_ 0.00 feet
 Rig on #2_ 3605 00 feet
 Facility Ver 0.00 feet
 Section Ori 0.00 feet
 Section Ori 0 00 feet
 Section Azi 85.74°

WELL PATH DATA Wellbore. #2 PWB Wellpath Plan #1 † = interpolated/extrapolated station									
	MD feet	Inclination deg	Azimuth deg	TVD feet	Vert Sect feet	North feet	East feet	DLS deg/100ft	Design Cor Path Comr Tgt#
	0	0	85 737	0	0	0	0	0	Tie On
†	100	0	0	100	0	0	0	0	
†	200	0	0	200	0	0	0	0	
†	300	0	0	300	0	0	0	0	
†	390	0	85 737	390	0	0	0	0	Yates
†	400	0	0	400	0	0	0	0	
†	500	0	0	500	0	0	0	0	
†	600	0	0	600	0	0	0	0	
†	700	0	0	700	0	0	0	0	
†	800	0	0	800	0	0	0	0	
†	900	0	0	900	0	0	0	0	
†	1000	0	0	1000	0	0	0	0	
†	1020	0	85 737	1020	0	0	0	0	Queen
†	1100	0	0	1100	0	0	0	0	
†	1200	0	0	1200	0	0	0	0	
†	1300	0	0	1300	0	0	0	0	
†	1400	0	0	1400	0	0	0	0	
†	1500	0	0	1500	0	0	0	0	
†	1600	0	0	1600	0	0	0	0	
†	1700	0	0	1700	0	0	0	0	
†	1800	0	0	1800	0	0	0	0	
†	1900	0	0	1900	0	0	0	0	
†	1950	0	85 737	1950	0	0	0	0	San Andres
†	2000	0	0	2000	0	0	0	0	
†	2100	0	0	2100	0	0	0	0	
†	2200	0	0	2200	0	0	0	0	

†	2300	0	0	2300	0	0	0	0
†	2400	0	0	2400	0	0	0	0
†	2500	0	0	2500	0	0	0	0
†	2600	0	0	2600	0	0	0	0
†	2700	0	0	2700	0	0	0	0
†	2800	0	0	2800	0	0	0	0
†	2900	0	0	2900	0	0	0	0
†	3000	0	0	3000	0	0	0	0
†	3100	0	0	3100	0	0	0	0
†	3200	0	0	3200	0	0	0	0
†	3300	0	0	3300	0	0	0	0
†	3370	0	85 737	3370	0	0	0	0
†	3400	0	0	3400	0	0	0	0
†	3500	0	0	3500	0	0	0	0
†	3600	0	0	3600	0	0	0	0
†	3700	0	0	3700	0	0	0	0
†	3800	0	0	3800	0	0	0	0
†	3900	0	0	3900	0	0	0	0
†	4000	0	0	4000	0	0	0	0
†	4100	0	0	4100	0	0	0	0
†	4200	0	0	4200	0	0	0	0
†	4300	0	0	4300	0	0	0	0
†	4400	0	0	4400	0	0	0	0
†	4500	0	0	4500	0	0	0	0
†	4600	0	0	4600	0	0	0	0
†	4700	0	0	4700	0	0	0	0
†	4800	0	0	4800	0	0	0	0
†	4900	0	0	4900	0	0	0	0
†	5000	0	0	5000	0	0	0	0
†	5100	0	0	5100	0	0	0	0
†	5200	0	0	5200	0	0	0	0
†	5300	0	0	5300	0	0	0	0
†	5400	0	0	5400	0	0	0	0
†	5500	0	0	5500	0	0	0	0
†	5600	0	0	5600	0	0	0	0
†	5700	0	0	5700	0	0	0	0
†	5800	0	0	5800	0	0	0	0

Glorieta

Abo

†	5900	0	0	5900	0	0	0	0	
†	6000	0	0	6000	0	0	0	0	
†	6100	0	0	6100	0	0	0	0	
†	6200	0	0	6200	0	0	0	0	
	6230	0	85.737	6230	0	0	0	0	KOP
†	6300	7.035	85.737	6299.82	4.29	0.32	4.28	10.05	
†	6400	17.085	85.737	6397.49	25.16	1.87	25.09	10.05	
†	6500	27.135	85.737	6490.02	62.75	4.66	62.58	10.05	
†	6569.76	34.146	85.737	6550	98.28	7.31	98.01	10.05	Wolfcamp
†	6600	37.185	85.737	6574.57	115.91	8.62	115.59	10.05	
†	6700	47.235	85.737	6648.54	183.01	13.6	182.5	10.05	
†	6800	57.285	85.737	6709.67	261.99	19.47	261.26	10.05	
†	6900	67.335	85.737	6756.08	350.42	26.05	349.45	10.05	
†	7000	77.385	85.737	6786.34	445.6	33.12	444.36	10.05	
†	7100	87.435	85.737	6799.54	544.59	40.48	543.09	10.05	
	7125.54	90.002	85.737	6800.11	570.12	42.38	568.55	10.05	EOC
†	7200	90.002	85.737	6800.11	644.58	47.91	642.8	0	
†	7300	90.002	85.737	6800.1	744.58	55.35	742.53	0	
†	7400	90.002	85.737	6800.1	844.58	62.78	842.25	0	
†	7500	90.002	85.737	6800.1	944.58	70.21	941.97	0	
†	7600	90.002	85.737	6800.09	1044.58	77.64	1041.7	0	
†	7700	90.002	85.737	6800.09	1144.58	85.08	1141.42	0	
†	7800	90.002	85.737	6800.09	1244.58	92.51	1241.14	0	
†	7900	90.002	85.737	6800.09	1344.58	99.94	1340.87	0	
†	8000	90.002	85.737	6800.08	1444.58	107.38	1440.59	0	
†	8100	90.002	85.737	6800.08	1544.58	114.81	1540.31	0	
†	8200	90.002	85.737	6800.08	1644.58	122.24	1640.04	0	
†	8300	90.002	85.737	6800.08	1744.58	129.68	1739.76	0	
†	8400	90.002	85.737	6800.07	1844.58	137.11	1839.48	0	
†	8500	90.002	85.737	6800.07	1944.58	144.54	1939.21	0	
†	8600	90.002	85.737	6800.07	2044.58	151.98	2038.93	0	
†	8700	90.002	85.737	6800.07	2144.58	159.41	2138.65	0	
†	8800	90.002	85.737	6800.06	2244.58	166.84	2238.38	0	
†	8900	90.002	85.737	6800.06	2344.58	174.27	2338.1	0	
†	9000	90.002	85.737	6800.06	2444.58	181.71	2437.82	0	
†	9100	90.002	85.737	6800.05	2544.58	189.14	2537.55	0	
†	9200	90.002	85.737	6800.05	2644.58	196.57	2637.27	0	

†	9300	90 002	85 737	6800.05	2744 58	204.01	2736.99	0
†	9400	90.002	85 737	6800 05	2844 58	211 44	2836.72	0
†	9500	90.002	85 737	6800.04	2944.58	218.87	2936.44	0
†	9600	90.002	85.737	6800 04	3044 58	226.31	3036.16	0
†	9700	90.002	85 737	6800.04	3144 58	233 74	3135.89	0
†	9800	90.002	85 737	6800.04	3244.58	241 17	3235.61	0
†	9900	90.002	85 737	6800 03	3344.58	248 61	3335 33	0
†	10000	90.002	85 737	6800.03	3444.58	256 04	3435 06	0
†	10100	90.002	85.737	6800 03	3544.58	263.47	3534.78	0
†	10200	90 002	85 737	6800.03	3644 58	270 9	3634.5	0
†	10300	90.002	85 737	6800.02	3744.58	278.34	3734 23	0
†	10400	90 002	85 737	6800 02	3844 58	285 77	3833 95	0
†	10500	90 002	85.737	6800.02	3944 58	293 2	3933.67	0
†	10600	90.002	85.737	6800.01	4044 58	300 64	4033.4	0
†	10700	90 002	85.737	6800.01	4144.58	308.07	4133.12	0
†	10800	90.002	85.737	6800.01	4244.58	315.5	4232.84	0
†	10900	90 002	85.737	6800 01	4344 58	322.94	4332.57	0
†	11000	90.002	85.737	6800	4444.58	330 37	4432.29	0
†	11100	90.002	85.737	6800	4544 58	337.8	4532 01	0
	11151.9	90 002	85.737	6800	4596 49	341.66	4583 77	0 #2 BHL

1

HOLE AND CASING SECTIONS Ref Wellbore: #2 PWB Ref Wellpath: Plan #1

String/Dian	Start MD	End MD	Interval	Start TVD	End TVD	Start N/S	End N/S	Start E/W	End E/W
	feet	feet	feet	feet	feet				
7.875in Op	6230	11151 9	4921.9	6230	6800	0	0	341.66	4583.77

T A R G E T S

Name	MD	TVD	North	East	Grid East	Grid North	Latitude	Longitude	Shape	Comment	Design Comments
	feet	feet	feet	feet	us survey f	us survey f	DegMinSec	DegMinSec			
(1) #2 BHL	11151 9	6800	341 66	4583.77	595639 5	693720 8	32 54 24 9	104 09 23	point		

SURVEY PROGRAM Ref Wellbore #2 PWB Ref Wellpath Plan #1

Start MD	End MD	Pos Unc	M Log Name/ Wellbore
feet	feet		
0	11151.9		NaviTrak (Standard) #2 PWB

COG OPERATING, LLC

**HYDROGEN SULFIDE (H₂S) CONTINGENCY PLAN
FOR DRILLING / COMPLETING / WORKOVER / FACILITY
WITH THE EXPECTATION OF H₂S IN EXCESS OF 100 PPM**

**COMET "22" FEDERAL #2
NEW DRILL WELL
SL: 1980' FSL & 330' FWL, UNIT L
BHL: 1980' FSL & 330' FEL, UNIT I
SECTION 22, T16S, R28E
EDDY COUNTY, NEW MEXICO**

This well / facility is not expected to have H₂S, but the following is submitted as requested.

TABLE OF CONTENTS

I.	General Emergency Plan	Page 3
II.	Emergency Procedure for Uncontrolled Release of H ₂ S	Page 3
III.	Emergency Numbers for Notification	Page 4
IV.	Protection of the General (ROE) Radius of Exposure	Page 5
V.	Public Evacuation Plan	Page 6
VI.	Procedure for Igniting an Uncontrollable Condition	Page 7
VII.	Required Emergency Equipment	Page 8
VIII.	Using Self-Contained Breathing Air Equipment (SCBA)	Page 9
IX.	Rescue & First Aid for Victims of H ₂ S Poisoning	Page 10
X.	H ₂ S Toxic Effects	Pages 11-12
XI.	H ₂ S Physical Effects	Pages 13-14
XII.	Location Map	Page 15
XIII.	Vicinity Map	Page 16

GENERAL H2S EMERGENCY ACTIONS

In the event of any evidence of H2S emergency, the following plan will be initiated:

1. All personnel will immediately evacuate to an up-wind and if possible up-hill "safe area".
2. If for any reason a person must enter the hazardous area, they must wear a SCBA (self-contained breathing apparatus).
3. Always use the "buddy system".
4. Isolate the well / problem if possible.
5. Account for all personnel.
6. Display the proper colors warning all unsuspecting personnel of the danger at hand.
7. Contact the company representative as soon as possible if not at the location (use the enclosed call list as instructed).

At this point the company representative will evaluate the situation and coordinate the necessary duties to bring the situation under control, and if necessary, the notification of emergency response agencies and residents.

EMERGENCY PROCEDURES FOR AN UNCONTROLLABLE RELEASE OF H2S

1. All personnel will don the self-contained breathing apparatus.
2. Remove all personnel to the "safe area: (always use the "buddy system").
3. Contact company representative if not on location.
4. Set in motion the steps to protect and / or remove the general public to any upwind "safe are". Maintain strict security and safety procedures while dealing with the source.
5. No entry to any unauthorized personnel.
6. Notify the appropriate agencies:
City Police - City streets
State Police - State Roads
County Sheriff - County Roads
7. Call the NMOCD.

If at this time the supervising person determines the release of H2S cannot be contained to the site location and the general public is in harms way, he will immediately notify public safety personnel.

EMERGENCY CALL LIST

	<u>Office</u>	<u>Cell</u>	<u>Home</u>
John Coffman	432-683-7443	432-631-9762	432-699-5552
Erick Nelson	432-683-7443	432-238-7591	
Matt Corser	432-683-7443	432-413-0071	

EMERGENCY RESPONSE NUMBERS

Eddy County, New Mexico

State Police	505-748-9718
Eddy County Sheriff	505-746-2701
Emergency Medical Services (Ambulance)	911 or 505-746-2701
Eddy County Emergency Management (Harry Burgess)	505-887-9511
State Emergency Response Center (SERC)	505-476-9620
Carlsbad Police Department	505-885-2111
Carlsbad Fire Department	505-885-3125
New Mexico Oil Conservation Division	505-748-1283
Callaway Safety Equipment, Inc.	505-392-2973

PROTECTION OF THE GENERAL (ROE) RADIUS OF EXPOSURE

In the event greater than 100 ppb H₂S is present, the ROE calculations will be done to determine if the following is warranted:

- * 100 ppm at any public area (any place not associated with this site)
- * 500 ppm at any public road (any road which the general public may travel).
- * 100 ppm radius of 3000' will be assumed if there is insufficient data to do the calculations, and there is a reasonable expectation that H₂S could be present in concentrations greater than 100 ppm in the gas mixture.

Calculation for the 100 ppm ROE: (H₂S concentrations in decimal form)

$$X = [(1.589)(\text{concentration})(Q)] (0.6258) \quad 10,000 \text{ ppm} + = .01$$

$$1,000 \text{ ppm} + = .001$$

Calculation for the 500 ppm ROE: 100 ppm + = .0001

$$10 \text{ ppm} + = .00001$$

$$X = [(0.4546)(\text{concentration})(Q)] (.06258)$$

EXAMPLE: If a well / facility has been determined to have 150 ppm H₂S in the gas mixture and the well / facility is producing at a gas rate of 200 MCFD then:

$$\text{ROE for 100 ppm} \quad X = [(1.589)(.00010)(200,000)] (0.6258)$$

$$X = 8.8'$$

$$\text{ROE for 500 ppm} \quad X = [(0.4546)(.00050)(200,000)] (0.6258)$$

$$X = 10.9'$$

These calculations will be forwarded to the appropriate NMOCD district office when applicable.

PUBLIC EVACUATION PLAN

When the supervisor has determined that the general public will be involved, the following plan will be implemented.

1. Notification of the emergency response agencies of the hazardous condition and implement evacuation procedures.
2. A trained person in H₂S safety shall monitor with detection equipment the H₂S concentration, wind and area of exposure. This person will determine the outer perimeter of the hazardous area. The extent of the evacuation area will be determined from the data being collected. Monitoring shall continue until the situation has been resolved. All monitoring equipment shall be UL approved for use in Class I Groups A, B, C & D, Division I hazardous locations. All monitors will have a minimum capability of measuring H₂S, oxygen, and flammable values.
3. Law enforcement shall be notified to set up necessary barriers and maintain such for the duration of the situation as well as aid in the evacuation procedure.
4. The company representative shall stay in communication with all agencies throughout the duration of the situation and inform such agencies when the situation has been contained and the effected area is safe to enter.

PROCEDURE FOR IGNITING AN UNCONTROLLABLE CONDITION

The decision to ignite a well should be a last resort and one, if not both, of the following pertain:

1. Human life and / or property are endangered.
2. There is no hope of bringing the situation under control with the prevailing conditions at the site.

Instructions for Igniting the Well:

1. Two people are required. They must be equipped with positive pressure, self-contained breathing apparatus and "D"-ring style, full body, OSHA approved safety harness. Non-flammable rope will be attached.
2. One of the people will be a qualified safety person who will test the atmosphere for H₂S, oxygen and LFL. The other person will be the company representative.
3. Ignite upwind from a distance no closer than necessary. Make sure that where you ignite from has the maximum escape avenue available. A 25mm flare gun with a range of approximately +/- 500 feet shall be used to ignite the gas.
4. Before igniting, check for the presence of combustible gases.
5. After igniting, continue emergency actions and procedures as before.

REQUIRED EMERGENCY EQUIPMENT

1. Breathing Apparatus

- * Rescue Packs (SCBA) – 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
- * Work / Escape Packs – 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- * Emergency Escape Packs – 4 packs shall be stored in the doghouse for emergency evacuation.

2. Signage and Flagging

- * One Color Code Condition Sign will be placed at the entrance to the site reflecting the possible conditions at the site.
- * A Colored Condition flag will be on display reflecting the condition at the site at that time.

3. Briefing Area

- * Two perpendicular areas will be designated by signs and readily accessible.

4. Windsocks

- * Two windsocks will be placed in strategic locations, visible from all angles.

5. H2S Detectors and Alarms

* The stationary detector with three (3) sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible alarm @ 15 ppm. Calibrate a minimum of every 30 days or as needed. The three sensors will be placed in the following places: (Gas sample tubes will be stored in the safety trailer):

- * Rig Floor
- * Bell Nipple
- * End of flow line or where well bore fluid is being discharged

6. Auxiliary Rescue Equipment

- * Stretcher
- * Two OSHA full body harnesses
- * 100' of 5/8" OSHA approved rope
- * One 20 lb. Class ABC fire extinguisher
- * Communication via cell phones on location and vehicles on location

USING SELF-CONTAINED BREATHING AIR EQUIPMENT (SCBA)

1. SCBA should be worn when any of the following are performed:
 - * Working near the top or on top of a tank
 - * Disconnecting any line where H₂S can reasonably be expected.
 - * Sampling air in the area to determine if toxic concentrations of H₂S exist.
 - * Working in areas where over 10 ppm of H₂S has been detected.
 - * At any time there is a doubt of the level of H₂S in the area.
2. All personnel shall be trained in the use of SCBA prior to working in a potentially hazardous location.
3. Facial hair and standard eyeglasses are not allowed with SCBA.
4. Contact lenses are never allowed with SCBA.
5. When breaking out any line where H₂S can reasonably be expected.
6. After each use, the SCBA unit shall be cleaned, disinfected, serviced and inspected.
7. All SCBA shall be inspected monthly.

RESCUE & FIRST AID FOR VICTIMS OF H2S POISONING

- * Do not panic.
- * Remain calm and think.
- * Get on the breathing apparatus.
- * Remove the victim to the safe breathing area as quickly as possible, upwind and uphill from source or crosswind to achieve upwind.
- * Notify emergency response personnel.
- * Provide artificial respiration and / or CPR as necessary.
- * Remove all contaminated clothing to avoid further exposure.
- * A minimum of two (2) personnel on location shall be trained in CPR and First Aid.

Toxic Effects of H2S Poisoning

Hydrogen Sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 PPM, which is .001% by volume. Hydrogen Sulfide is heavier than air (specific gravity-1.192) and is colorless and transparent. Hydrogen Sulfide is almost as toxic as Hydrogen Cyanide and is 5-6 times more toxic than Carbon Monoxide. Occupational exposure limits for Hydrogen sulfide and other gasses are compared below in Table 1. toxicity table for H2S and physical effects are shown in Table II.

Table 1
Permissible Exposure Limits of Various Gasses

Common Name	Symbol	Sp. Gravity	TLV	STEL	IDLH
Hydrogen Cyanide	HCN	.94	4.7 ppm	C	
Hydrogen Sulfide	H2S	1.192	10 ppm	15 ppm	100 ppm
Sulfide Dioxide	SO2	2.21	2 ppm	5 ppm	
Chlorine	CL	2.45	.5 ppm	1 ppm	
Carbon Monoxide	CO	.97	25 ppm	200 ppm	
Carbon Dioxide	CO2	1.52	5000 ppm	30,000 ppm	
Methane	CH4	.55	4.7% LEL	14% UEL	

Definitions

- A. TLV – Threshold Limit Value is the concentration employees may be exposed to based on a TWA (time weighted average) for eight (8) hours in one day for 40 hours in one (1) week. This is set by ACGIH (American Conference of Governmental Hygienists and regulated by OSHA.
- B. STEL – Short Term Exposure Limit is the 15 minute average concentration an employee may be exposed to providing that the highest exposure never exceeds the OEL (Occupational Exposure Limit). The OEL for H2S is 19 PPM.
- C. IDLH – Immediately Dangerous to Life and Health is the concentration that has been determined by the ACGIH to cause serious health problems or death if exposed to this level. The IDLH for H2S is 100 PPM.
- D. TWA – Time Weighted Average is the average concentration of any chemical or gas for an eight (8) hour period. This is the concentration that any employee may be exposed to based on an TWA.

TABLE II
Toxicity Table of H₂S

Percent %	PPM	Physical Effects
.0001	1	Can smell less than 1 ppm.
.001	10	TLV for 8 hours of exposure
.0015	15	STEL for 15 minutes of exposure
.01	100	Immediately Dangerous to Life & Health. Kills sense of smell in 3 to 5 minutes.
.02	200	Kills sense of smell quickly, may burn eyes and throat.
.05	500	Dizziness, cessation of breathing begins in a few minutes.
.07	700	Unconscious quickly, death will result if not rescued promptly.
.10	1000	Death will result unless rescued promptly. Artificial resuscitation may be necessary.

PHYSICAL PROPERTIES OF H₂S

The properties of all gasses are usually described in the context of seven major categories:

COLOR
ODOR
VAPOR DENSITY
EXPLOSIVE LIMITS
FLAMMABILITY
SOLUBILITY (IN WATER)
BOILING POINT

Hydrogen Sulfide is no exception. Information from these categories should be considered in order to provide a fairly complete picture of the properties of the gas.

COLOR – TRANSPARENT

Hydrogen Sulfide is colorless so it is invisible. This fact simply means that you can't rely on your eyes to detect its presence, a fact that makes the gas extremely dangerous to be around.

ODOR – ROTTEN EGGS

Hydrogen Sulfide has a distinctive offensive smell, similar to "rotten eggs". For this reason it earned its common name "sour gas". However, H₂S, even in low concentrations, is so toxic that it attacks and quickly impairs a victim's sense of smell, so it could be fatal to rely on your nose as a detection device.

VAPOR DENSITY – SPECIFIC GRAVITY OF 1.192

Hydrogen Sulfide is heavier than air so it tends to settle in low-lying areas like pits, cellars or tanks. If you find yourself in a location where H₂S is known to exist, protect yourself. Whenever possible, work in an area upwind and keep to higher ground.

EXPLOSIVE LIMITS – 4.3% TO 46%

Mixed with the right proportion of air or oxygen, H₂S will ignite and burn or explode, producing another alarming element of danger besides poisoning.

FLAMMABILITY

Hydrogen Sulfide will burn readily with a distinctive clear blue flame, producing Sulfur Dioxide (SO₂), another hazardous gas that irritates the eyes and lungs.

SOLUBILITY – 4 TO 1 RATIO WITH WATER

Hydrogen Sulfide can be dissolved in liquids, which means that it can be present in any container or vessel used to carry or hold well fluids including oil, water, emulsion and sludge. The solubility of H₂S is dependent on temperature and pressure, but if conditions are right, simply agitating a fluid containing H₂S may release the gas into the air.

BOILING POINT – (-76 degrees Fahrenheit)

Liquefied Hydrogen Sulfide boils at a very low temperature, so it is usually found as a gas.

SURFACE USE AND OPERATIONS PLAN
FOR DRILLING, COMPLETION, AND PRODUCING

C.O.G. Operating, LLC
Comet "22" Federal #2
SL: 1980' FSL & 330' FWL, Unit L
BHL: 1980' FSL & 330' FEL, Unit I
Sec 22, T16S, R28E
Eddy County, New Mexico

LOCATED

Approximately 13 miles Northwest from Loco Hills, New Mexico

OIL & GAS LEASE

SL: NMLC #100844
BHL: NMLC #095630

RECORD TITLE LESSEE

SL: COG Operating, LLC, 550 W. Texas, Suite 1300, Midland, TX 79701
BHL: Nearburg Exploration Co LLC, 3300 N. A St, #120, Midland, TX 79705

BOND COVERAGE

\$25,000 statewide bond of C.O.G. Operating, L.L.C. NMB 000215

SURFACE OWNER

Bureau of Land Management

MINERAL OWNER

Bureau of Land Management

GRAZING TENANT

Bogle LTD CO LLC, PO Box 460, Dexter, NM 88230; 505-734-5442

POOL

Crow Flats Wolfcamp (#97102)

PROPOSED TOTAL DEPTH

This well will be drilled to a Total Vertical Depth of approximately 6800' and a Measured Depth of approximately 11150'.

Comet "22" Federal #2
Page 2

EXHIBITS

- A. Well Location & Acreage Dedication Map
- B. Area Road Map
- C. Vicinity Oil & Gas Map
- D. Topographic & Location Verification Map
- E. Proposed Lease Road and Pad Layout Map
- F. Drilling Rig Layout
- G. BOPE Schematic
- H. Choke Manifold Schematic
- I-1. Pipeline Plat
- I-2. Pipeline Topo

EXISTING ROADS

- A. Exhibit A is a portion of a section map showing the location of the proposed well as staked.
- B. Exhibit B is a map showing existing roads in the vicinity of the proposed well site.
- C. Directions to well location:
From the junction of U.S. Hwy 82 and County Road 202 (Southern Union), go North on County Road 202 for 3.8 miles to lease road. On lease road go North 1.5 miles to lease road. On lease road, go East 1.5 miles to lease road. On lease road go North 2.7 miles to lease road, thence East 1.0 miles, thence South to ELK "21" #1 and proposed lease road.

ACCESS ROADS

- A. Length and Width: 466.9'' long and 30' wide. The access road will be built and is shown on Exhibit E.
- B. Surface Material: Existing
- C. Maximum Grad: Less than five percent
- D. Turnouts: None necessary
- E. Drainage Design: Existing
- F. Culverts: None necessary
- G. Gates and Cattle Guards: None needed

LOCATION OF EXISTING WELLS

Existing wells in the immediate area are shown in Exhibit C.

LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

Necessary production facilities for this well will be located on the well pad.

LOCATION AND TYPE OF WATER SUPPLY

It is not contemplated that a water well will be drilled. Water necessary for drilling will be purchased and hauled to the site over existing roads shown on Exhibit B.

METHODS OF HANDLING WASTE DISPOSAL


- A. Drilling fluids will be allowed to evaporate in the drilling pits until the pits are dry.
- B. Water produced during tests will be disposed of in the drilling pits.
- C. Oil produced during tests will be stored in test tanks.
- D. Trash will be contained in a trash trailer and removed from well site.
- E. All trash and debris will be removed from the well site within 30 days after finishing drilling and/or completion operations.

ANCILLARY FACILITIES

None required.

WELL SITE LAYOUT

Exhibits E and F show the relative location and dimensions of the well pad, mud pits, reserve pit, and trash pit, and the location of major rig components.

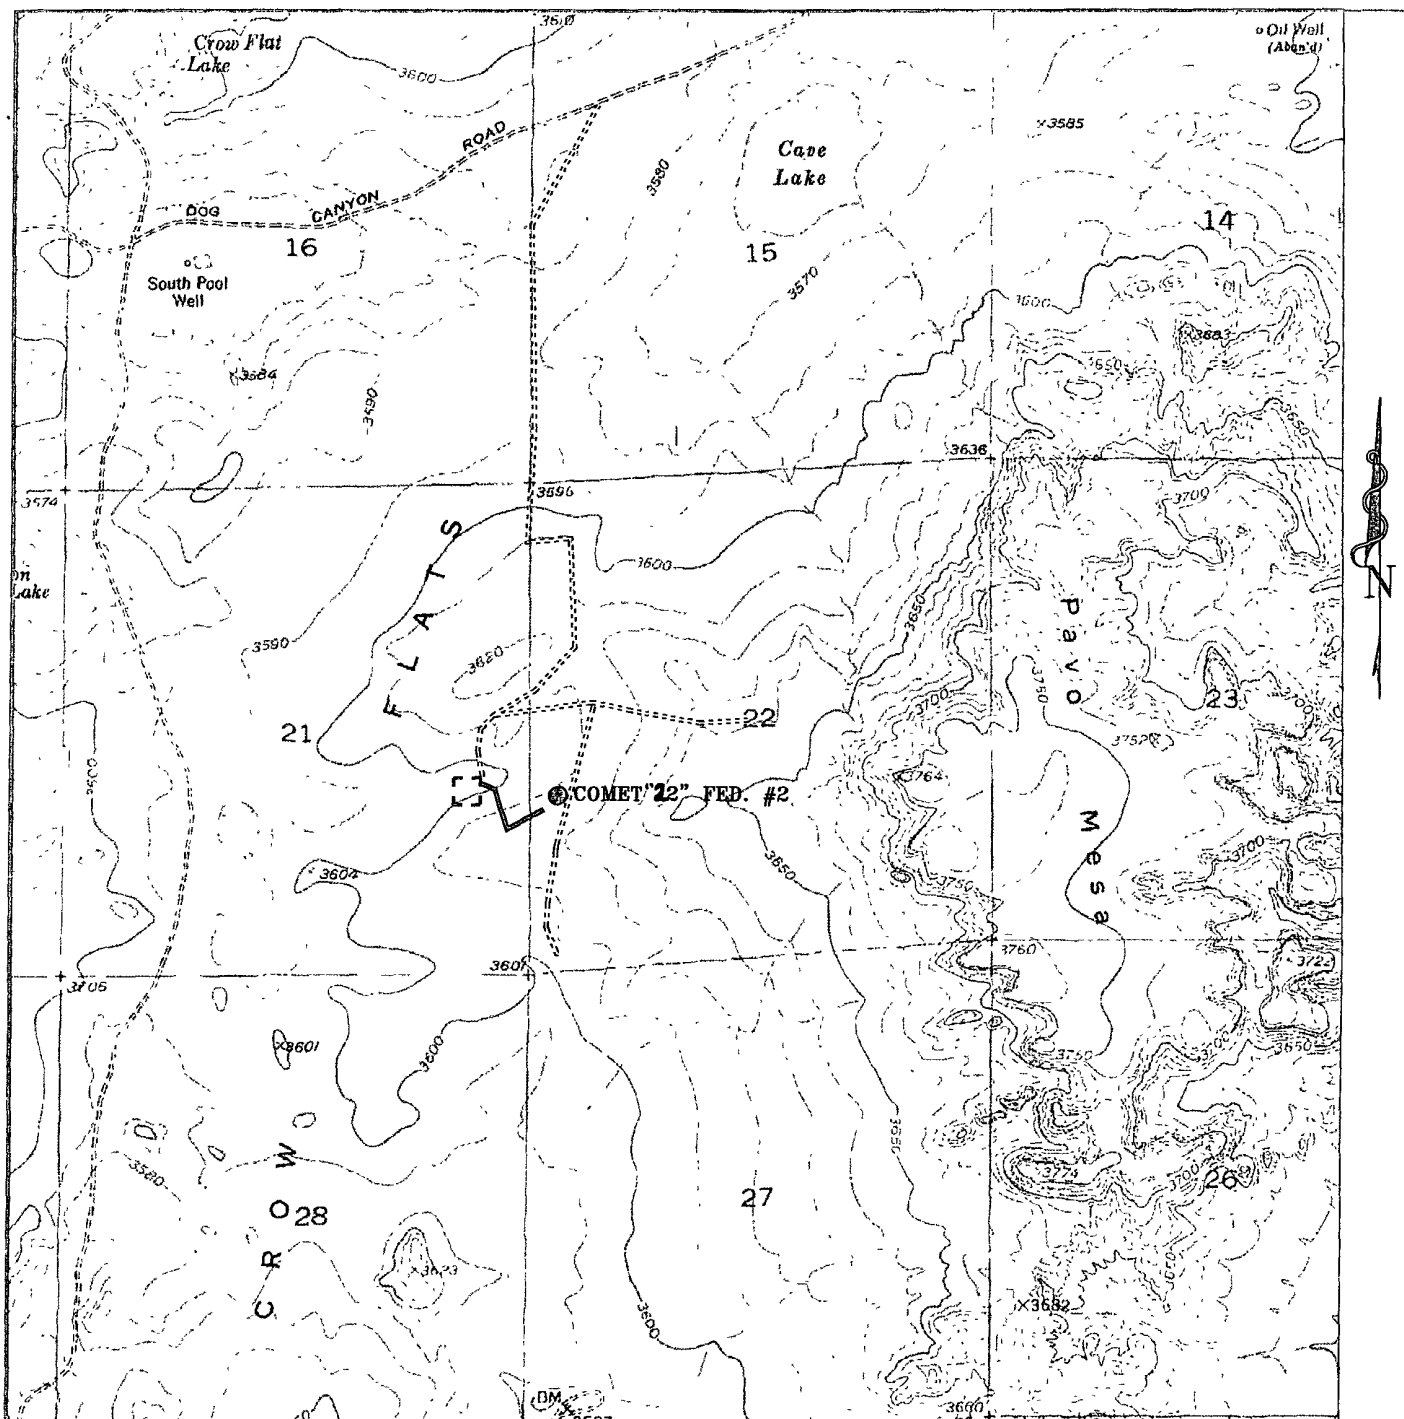

COMET "22" FEDERAL #2

Located at 1980' FSL and 330 FWL
 Section 22, Township 16 South, Range 28 East,
 N.M.P.M., Eddy County, New Mexico.



focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (505) 393-7316 - Office
 (505) 392-3074 - Fax
 basinsurveys.com

W O Number JMS 18032T


Survey Date 05-04-2007

Scale 1" = 2000'

Date 05-10-2007

**C.O.G.
 OPERATING
 L.L.C.**

**SECTION 22, TOWNSHIP 16 SOUTH, RANGE 28 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.**

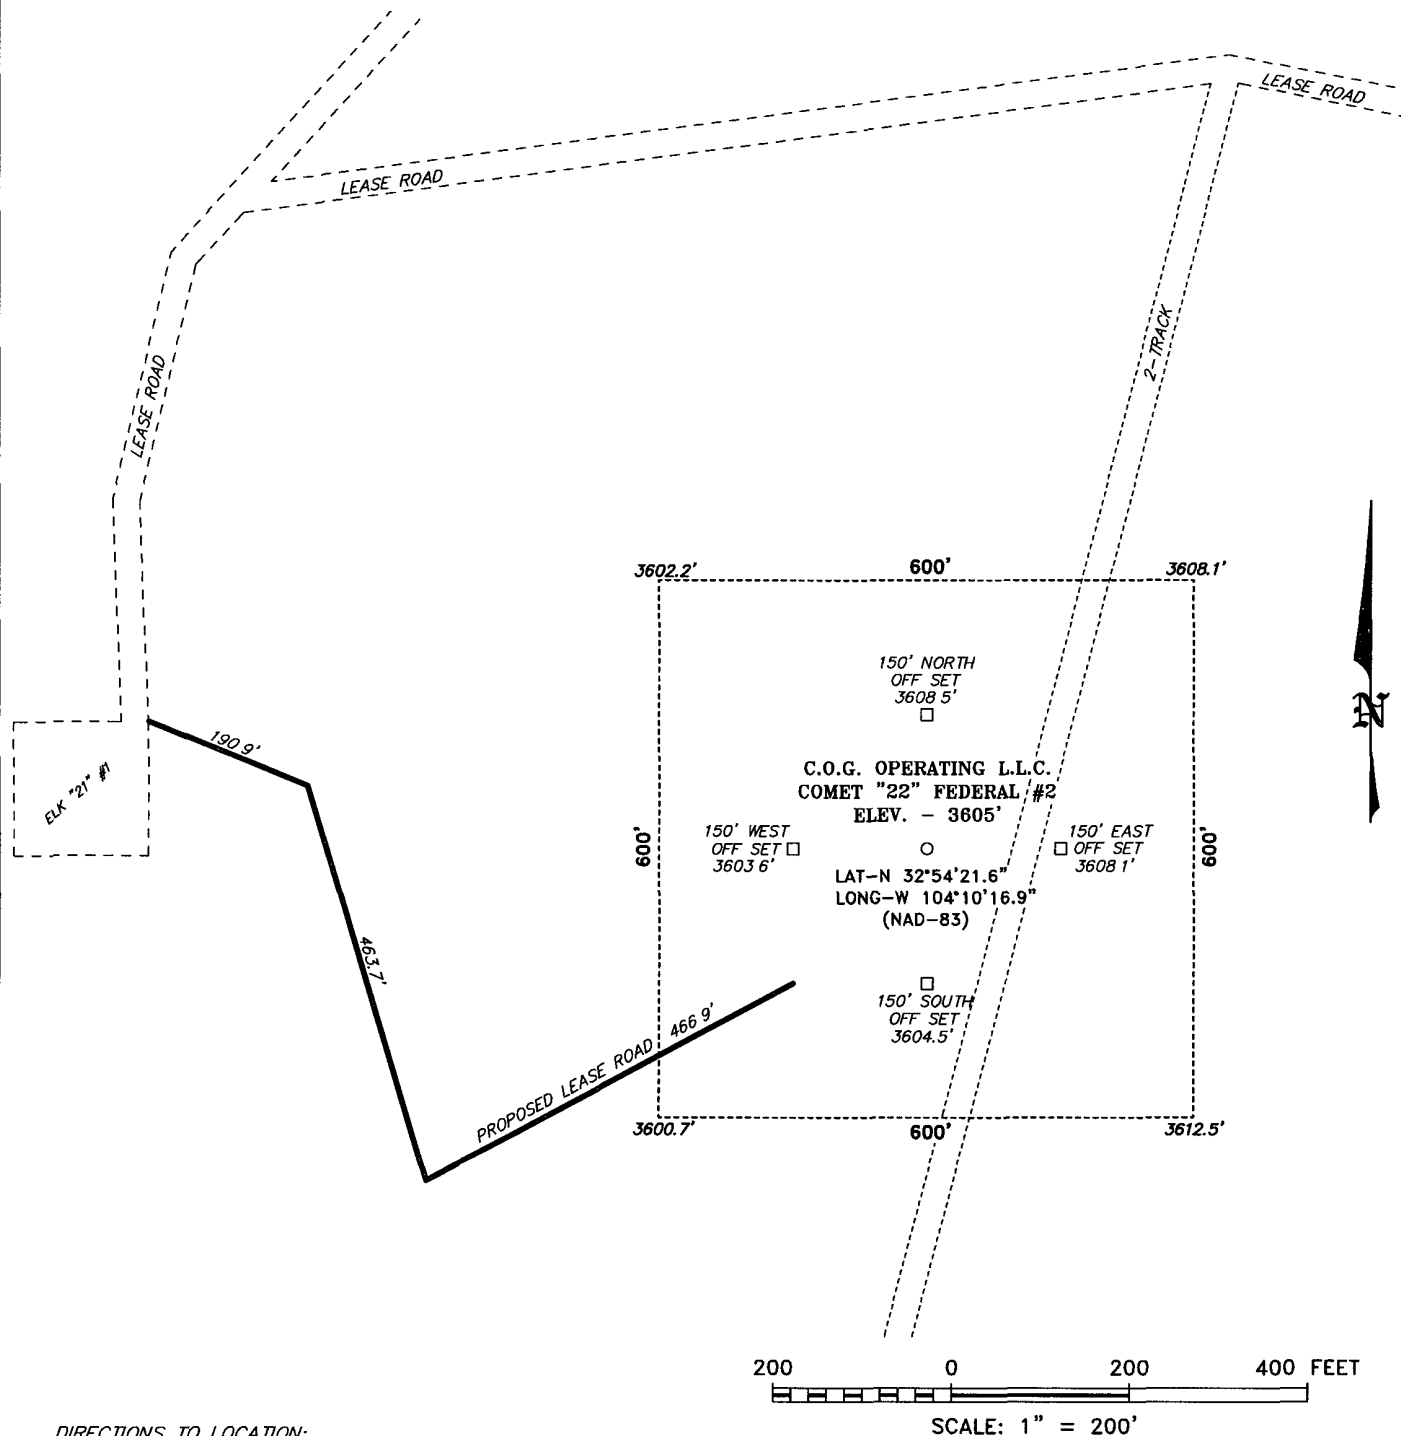

DIRECTIONS TO LOCATION:

FROM THE JUNCTION OF U.S. HWY 82 AND CO RD. 202 (SOUTHERN UNION), GO NORTH ON CO. RD. 202 FOR 3.8 MILES TO LEASE ROAD, ON LEASE ROAD GO NORTH 1.5 MILES TO LEASE ROAD, ON LEASE ROAD GO EAST 1.5 MILES TO LEASE ROAD, ON LEASE ROAD GO NORTH 2.7 MILES TO LEASE ROAD, THENCE EAST 1.0 MILES; THENCE SOUTH TO ELK "21" #1 LOCATION AND PROPOSED LEASE ROAD.

BASIN SURVEYS

P.O. BOX 1786—HOBBS, NEW MEXICO

W.O. Number: 18032

Drawn By: J. M. SMALL

Date: 05-10-2007

Disk: JMS 18032W

C.O.G. OPERATING L.L.C.


REF: COMET "22" FEDERAL #2 / Well Pad Topo

THE COMET "22" FEDERAL #2 LOCATED 1980' FROM
THE SOUTH LINE AND 330' FROM THE WEST LINE OF
SECTION 22, TOWNSHIP 16 SOUTH, RANGE 28 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

Survey Date: 05-04-2007

Sheet 1 of 1 Sheets

**SECTION 22, TOWNSHIP 16 SOUTH, RANGE 28 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.**

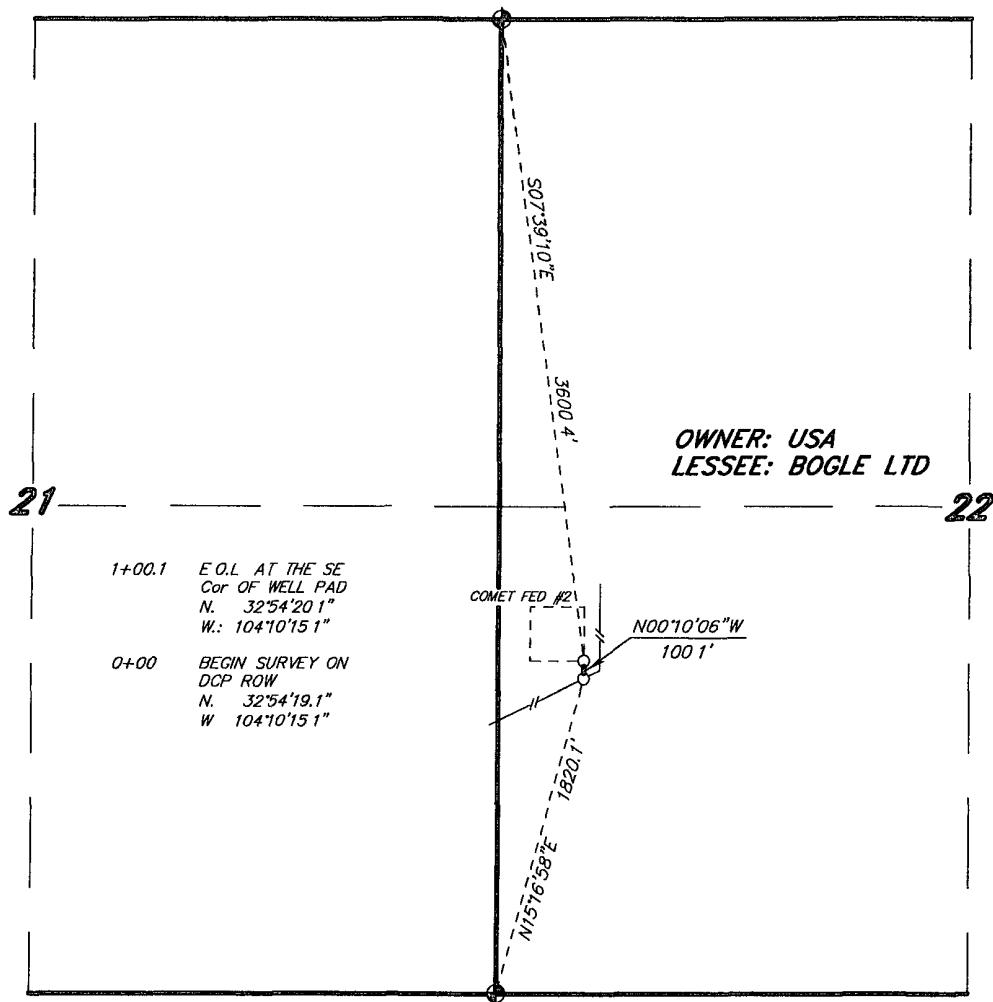

LEGAL DESCRIPTION

A STRIP OF LAND 30.0 FEET WIDE, LOCATED IN SECTION 22, TOWNSHIP 16 SOUTH, RANGE 28 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO AND BEING 15.0 FEET LEFT AND RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY

SECTION 22 = 1001 FEET = 6.07 RODS = 0.02 MILES = 0.07 ACRES

I HEREBY CERTIFY THAT THIS PLAT WAS PREPARED FROM FIELD NOTES OF AN ORIGINAL SURVEY AND MEETS OR EXCEEDS ALL REQUIREMENTS FOR LAND SURVEYS AS SPECIFIED BY THIS STATE

GARY L. JONES
TEXAS P.L.S.

No. 7977
No. 5074

BASIN SURVEYS P.O. BOX 1786—HOBBS, NEW MEXICO

W.O. Number: 18441

Drawn By: J. M. SMALL

Date: 08-14-2007

Disk: JMS 18441P

Survey Date: 08-14-2007

Sheet 1 of 1 Sheets

1000 0 1000 2000 FEET

C.O.G. OPERATING L.L.C.

REF: PROP PIPELINE TO THE COMET FEDERAL #2

A PIPELINE CROSSING USA LAND IN
SECTION 22, TOWNSHIP 16 SOUTH, RANGE 28 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

Conditions of Approval Cave and Karst

EA#: NM-520-07-1203
Lease #: NM-100844, NM-~~0~~95630
COG Operating LLC *AK*
Comet "22" Federal # 2 and # 3

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production.

Berming:

Any tank batteries will be constructed and bermed large enough to contain any spills that may occur.

Bermed areas will be lined with rip-stop padding to prevent tears or punctures in liners and lined with a permanent 20 mil plastic liner.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Rotary drilling techniques in cave or karst areas will include the use of fresh water as a circulating medium in zones where caves or karst features are expected. Use depth to the deepest expected fresh water as listed in the geologist report.

Casing:

All casing will meet or exceed National Association of Corrosion Engineers specifications pertaining to the geology of the location and be run to American Petroleum Institute and BLM standards.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported.

Regardless of the type of drilling machinery used, if a void (bit drops) of four feet or more and circulation losses greater than 75 percent occur simultaneously while drilling in any cave-bearing zone, drilling operations will immediately stop and the BLM will be notified by the operator. The BLM will assess the consequences of the situation and work with operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment the well bore will be cemented completely from 100 feet below the bottom of the cave bearing zone to the surface.

Record Keeping:

The Operator will track customary drilling activities, including the rate of penetration, pump pressure, weight on bit, bit drops, percent of mud returns, and presence or absence of cuttings returning to the surface. As part of customary record keeping, each detectable void or sudden increase in the rate of penetration not attributable to a change in the formation type should be documented and evaluated as it is encountered.

CONDITIONS OF APPROVAL - DRILLING

Operator's Name: COG Operating LLC
Well Name & No. 2-Comet "22" Federal
Location SHL: 1980' FSL, 0330' FWL, Sec. 22, T-16-S, R-28-E, Eddy County, NM
Location BHL: 1980' FSL, 0330' FEL, Sec. 22, T-16-S, R-28-E, Eddy County, NM
Lease: NM-100844 (SHL) / NM-095630 (BHL)

.....

I. DRILLING OPERATIONS REQUIREMENTS:

- A. The Bureau of Land Management (BLM) is to be notified a minimum of 2 hours in advance for a representative to witness:
1. Spudding well
 2. Setting and/or Cementing of all casing strings
 3. BOPE tests
- Eddy County call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (505) 361-2822
- B. **Although Hydrogen Sulfide has not been reported in this section, it is always a potential hazard. If H₂S is detected, please report the measurements to the BLM.**
- C. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
- D. When floor controls are required, (3M or Greater), controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

II. CASING:

- A. The 13-3/8 inch surface casing shall be set in the Tansill Formation at approximately 500 feet and cemented to the surface.
1. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with a surface log readout will be used or a cement bond log shall be run to verify the top of the cement.
 2. Wait on cement (WOC) time for a primary cement job will be a minimum of 18 hours or 24 hours in the potash area or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 3. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 4. **If cement falls back, remedial action will be done prior to drilling out that string.**

Possible lost circulation in the Grayburg and San Andres formations.

High cave/karst area.

High pressure gas bursts possible within the Wolfcamp formation.

- B.** The minimum required fill of cement behind the 9-5/8 inch intermediate casing is cement shall come to surface. If cement does not come to surface see A.1 thru 4.

If 75% or greater lost circulation occurs while drilling the intermediate casing hole, the cement on the production casing must come to surface.

- C.** The minimum required fill of cement behind the 5-1/2 inch production casing is **cement to extend a minimum of 200 feet inside the intermediate casing. Proposed cement volume is inadequate to get to required height. Prior to moving the rig, please provide verification of cement top.**
- D.** If hardband drill pipe is rotated inside casing; returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

III. PRESSURE CONTROL:

- A.** All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- B.** The appropriate BLM office shall be notified a minimum of 2 hours in advance for a representative to witness the tests.
1. The tests shall be done by an independent service company.
 2. The results of the test shall be reported to the appropriate BLM office.
 3. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 4. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.
 5. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp **if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days.** This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.
 6. A variance to test the surface casing and BOP/BOPE to the reduced pressure of 1000 psi with rig pumps is approved.

IV. DRILLING MUD:

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the **Wolfcamp** formation and shall be used until production casing is run and cemented.

1. Recording pit level indicator to indicate volume gains and losses.
2. Mud measuring device for accurately determining the mud volumes necessary to fill the hole during trips.
3. Flow-sensor on the flow line to warn of abnormal mud returns from the well

Engineer on call phone (after hours): Carlsbad - 505-706-2779

WWI 081507