

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505



JAN 23 2009

OCD-ARTESIA

Form C-103
May 27, 2004

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-31365
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator OXY USA Inc.		6. State Oil & Gas Lease No.
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250		7. Lease Name or Unit Agreement Name: Davis 18
4. Well Location Unit Letter <u>D</u> : <u>660</u> feet from the <u>north</u> line and <u>660</u> feet from the <u>west</u> line Section <u>18</u> Township <u>20S</u> Range <u>27E</u> NMPM County <u>Eddy</u>		8. Well Number 1
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3334'		9. OGRID Number 16696
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

**Notify OCD 24 hrs. prior
to any work done.**

See Attachment

Approval Granted providing work
is complete by 4/26/09

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 4/22/09

Type or print name David Stewart

E-mail address:

david_stewart@oxy.com

Telephone No. 432-685-5717

For State Use Only

APPROVED BY Phyllis Harper TITLE Comptroller DATE 4/26/09

Conditions of Approval, if any:

TD-10550' PBTB-10150' Perfs-8832-8844' 10225-10326' CIBP-10200' 10285'

13-3/8" 48-61# csg @ 515' w/625sx, 17-1/2" hole, TOC-Surf-Circ

9-5/8" 43.5-47-53.5# @ 2915' w/ 975sx, 12-1/4" hole, TOC-Surf-Circ

5-1/2" 17# csg @ 10550' w/2200sx, 8-1/2" hole, TOC-Surf-Circ

1st w/ 500sx, DVT @ 9009' w/ 1000sx, DVT @ 6007' w/ 700sx

Circ well w/ 10# MLF & between plugs

1. RIH & Set CIBP @ 8785' M&P 25sx cmt

2. M&P 25sx cmt @ 7890-7790'

3. M&P 25sx cmt @ 6062-5962'

4. M&P 25sx cmt @ 4510-4410'


5. M&P 25sx cmt @ 2965-2865' ← WOC - Tag

6. M&P 25sx cmt @ 1560-1460'

7. M&P 25sx cmt @ 565-465' WOC-Tag

8. M&P 25sx cmt @ 100' to Surface

OXY USA Inc. - Current
Davis 18 #1
API No. 30-015-31365

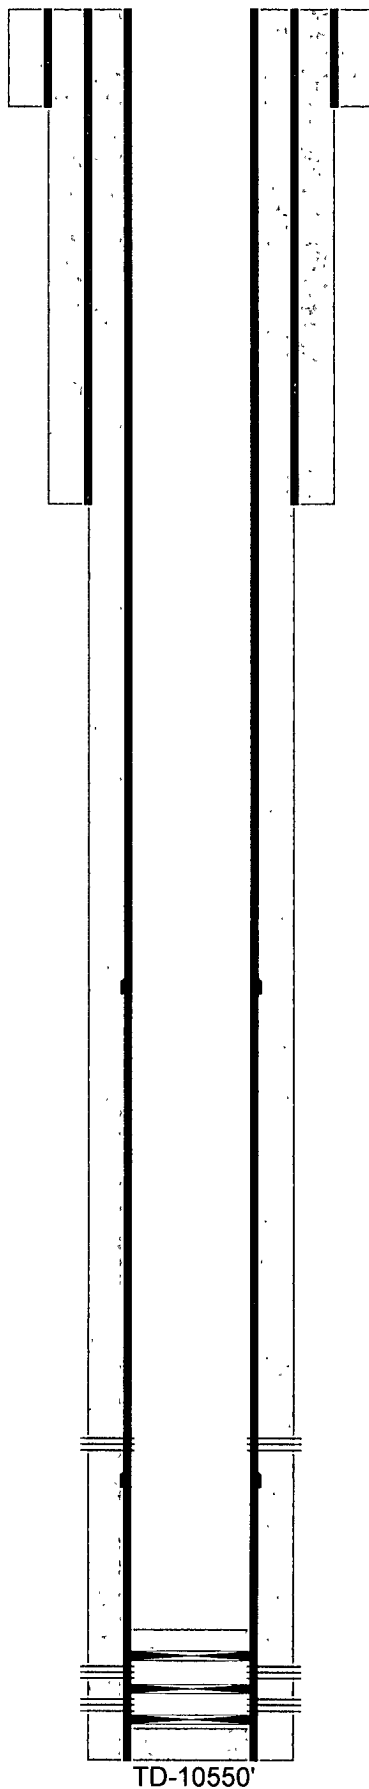

17-1/2" hole @ 515'
13-3/8" csg @ 515'
w/ 625sx-TOC-Surf-Circ

12-1/4" hole @ 2915'
9-5/8" csg @ 2915'
w/ 975sx-TOC-Surf-Circ

3/07-CIBP @ 10200' w/ 50' cmt
5/05-CIBP @ 10285'
5/05-CIBP @ 10326'
PBTD-10500'

Perfs @ 8832-8844'

8-1/2" hole @ 10550'
5-1/2" csg @ 10550'
DVT @ 9009' & 6012'
1st w/ 500sx-TOC-9004'-Circ
2nd w/ 1000sx-TOC-6007'-Circ
3rd w/ 700sx-TOC-Surf-Circ

Perfs @ 10225-10270'
Perfs @ 10296-10326'

OXY USA Inc. - Proposed
Davis 18 #1
API No. 30-015-31365

25sx @ Surface

25sx @ 565-465' WOC-Tag

25sx @ 1560-1460'

25sx @ 2965-2865' WOC - Tag


25sx @ 4510-4410'

25sx @ 6062-5962'

25sx @ 7890-7790'

CIBP @ 8785' w/ 25sx

3/07-CIBP @ 10200' w/ 50' cmt
5/05-CIBP @ 10285'
5/05-CIBP @ 10326'
PBTD-10500'

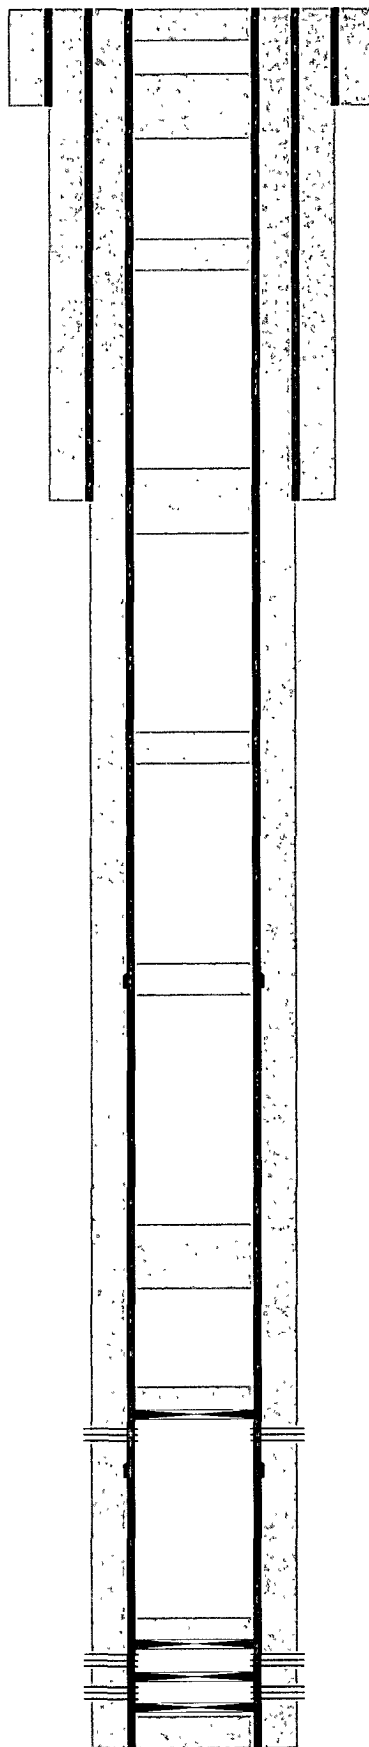

17-1/2" hole @ 515'
13-3/8" csg @ 515'
w/ 625sx-TOC-Surf-Circ

12-1/4" hole @ 2915'
9-5/8" csg @ 2915'
w/ 975sx-TOC-Surf-Circ

Perfs @ 8832-8844'

8-1/2" hole @ 10550'
5-1/2" csg @ 10550'
DVT @ 9009' & 6012'
1st w/ 500sx-TOC-9004'-Circ
2nd w/ 1000sx-TOC-6007'-Circ
3rd w/ 700sx-TOC-Surf-Circ

Perfs @ 10225-10270'

Perfs @ 10296-10326'

TD-10550'