

Submit 3 Copies To Appropriate District Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

FEB - 2 2009 Form C-103  
June 19, 2008

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505



WELL API NO. 30-015-21671
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Smith FA
8. Well Number 1
9. OGRID Number 025575
10. Pool name or Wildcat Eagle Creek; San Andres

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other **REVISED**

2. Name of Operator  
Yates Petroleum Corporation

3. Address of Operator  
105 South Fourth Street, Artesia, NM 88210

4. Well Location  
Unit Letter C : 924 feet from the North line and 1710 feet from the West line  
Section 13 Township 17S Range 25E NMPM Eddy County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
3465'GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU WSU and safety equipment as needed. POOH with rods and pump. NU BOP. POOH with tubing and lay down TAC, S/N, perf sub, mud joint with bull plug and all but 1162' of tubing.
2. Set a 4-1/2" CIBP at 1347' with 35' cement on top.
3. Spot a 25 sx cement plug across the shoe from 1151'-1251'. WOC and tag plug, reset if necessary.
4. Spot a 25 sx cement plug across the shoe from 248'-348'. WOC and tag plug, reset if necessary.
5. Spot a 25 sx cement plug from 0'-100'. WOC and tag plug, reset if necessary.
6. Cut off wellhead and install marker and clean up location as per regulated.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Approval Granted providing work  
is complete by 5/3/09

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE January 29, 2009

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY: [Signature] TITLE Compliance Officer DATE 2/3/09

Conditions of Approval (if any):


**WELL NAME:** Smith FA #1      **FIELD:** Eagle Creek  
**LOCATION:** 924' FNL & 1,710' FWL of Section 13-17S-25E      Eddy Co., NM  
**GL:** 3,465'      **ZERO:**      **KB:**      **CASING PROGRAM**  
**SPUD DATE:** 11/4/75      **COMPLETION DATE:** 12/1/75  
**COMMENTS:** API No.: 30-015-21671

10-3/4" 32# J-55	<b>348'</b>
7" 20# K-55	<b>1,201'</b>
5-1/2" 14 J55 (1000')	
4-1/2" 9.5 J55 (497')	<b>1,497'</b>

15" Hole

9-7/8" Hole

6-1/4" Hole

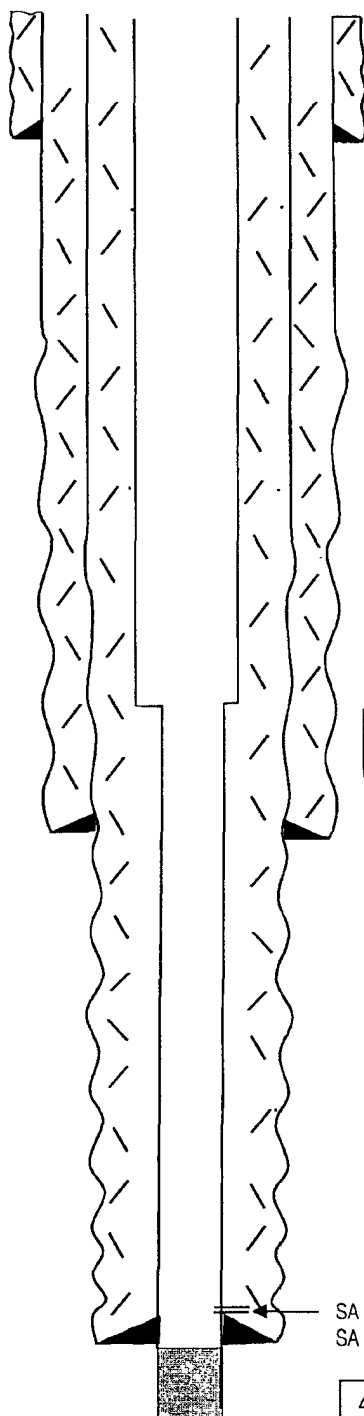

10-3/4" @ 348' w/ 250  
sx (Circ)

Ran 4-1/2" from 1000-1,497'

7" @ 1,201' w/500  
1"ed w/550 to surface

SA Perfs: 1,397-1,497'  
SA Open Hole Perfs. 1,498-1,503

4-1/2 x 5-1/2" set at 1,497' cmted  
with 150 sx (Circ)

PBTd: 1,497'  
TD: 1,520'

**Before**

**TOPS**

SA 768'

**Not to Scale**  
 1/19/09  
 DC/Hill


**WELL NAME:** Smith FA #1      **FIELD:** Eagle Creek  
**LOCATION:** 924' FNL & 1,710' FWL of Section 13-17S-25E      Eddy Co., NM  
**GL:** 3,465'      **ZERO:**      **KB:**      **CASING PROGRAM**  
**SPUD DATE:** 11/4/75      **COMPLETION DATE:** 12/1/75  
**COMMENTS:** API No.: 30-015-21671

10-3/4" 32# J-55	348'
7" 20# K-55	1,201'
5-1/2" 14 J55 (1000')	
4-1/2" 9.5 J55 (497')	1,497'

**After**

**TOPS**

SA      768'

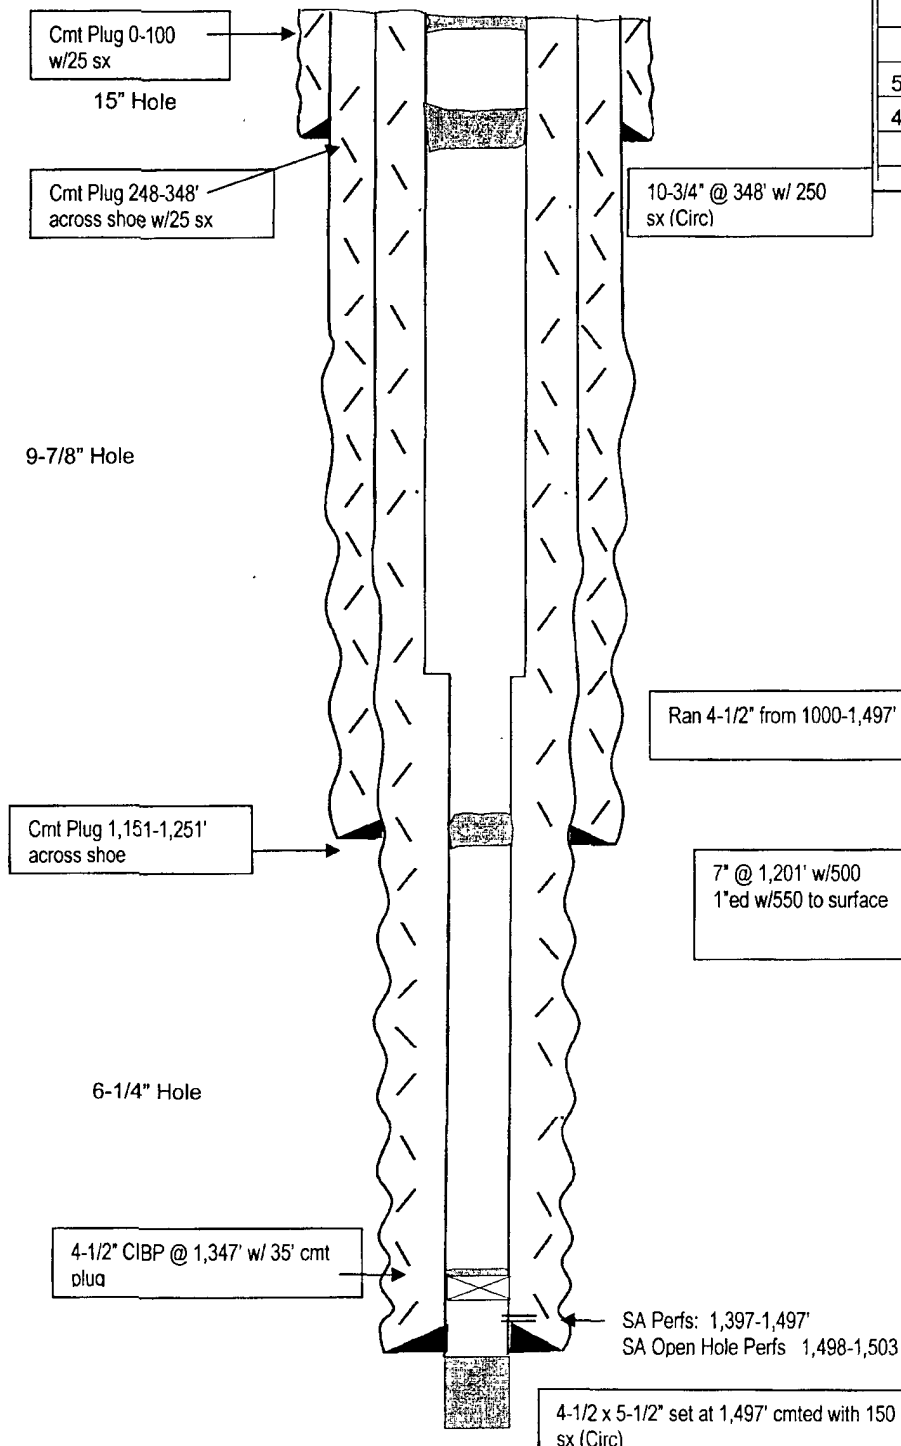

Ran 4-1/2" from 1000-1,497'

7" @ 1,201' w/500  
1" ed w/550 to surface

SA Perfs: 1,397-1,497'  
SA Open Hole Perfs 1,498-1,503

4-1/2 x 5-1/2" set at 1,497' cmted with 150  
sx (Circ)

PBTD: 1,497'  
TD: 1,520'

**Not to Scale**  
 1/19/09  
 DC/Hill