

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
May 27, 2004

WELL API NO. 30-015-20971
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name: Saik
8. Well Number 1
9. OGRID Number 192463
10. Pool name or Wildcat Carlsbad Wolfcamp, East

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other	RECEIVED	6. State Oil & Gas Lease No.
2. Name of Operator OXY USA WTP LP	FEB - 9 2010	7. Lease Name or Unit Agreement Name: Saik
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	NMOCD ARTESIA	8. Well Number 1
4. Well Location Unit Letter B : 990 feet from the north line and 1980 feet from the east line Section 17 Township 22S Range 27E NMPM County Eddy		9. OGRID Number 192463
	11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3122' GR	10. Pool name or Wildcat Carlsbad Wolfcamp, East
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/> Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____ Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

Notify OCD 24 hrs. prior to any work done.

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 2/4/10
E-mail address: david_stewart@oxy.com
Type or print name David Stewart Telephone No. 432-685-5717

For State Use Only

APPROVED BY Phyllis Harker TITLE Approval Granted providing work is complete by 2/11/2010 DATE 2/11/2010
Conditions of Approval, if any:

TD-11690' PBD-10065' Perfs-9434-9713' CIBP-10100'

13-3/8" 48# csg @ 358' w/ 380sx, 17-1/2" hole, TOC-Surf-Circ
9-5/8" 36-40# csg @ 5360', w/ 1150sx, 12-1/4" hole, TOC-1100'-TS
7" 23-26-29# csg @ 10500' w/ 575sx, 8-3/4" hole, TOC-7300'-TS
4-1/2" liner @ 10382-11685' w/ 180sx, 6" hole, TOC-10382'-Circ

1. RIH & set CIBP @ 9384', M&P 25sx cmt to 9284'
2. Cut & pull 7" csg @ +/- 7100' M&P
3. M&P 65sx cmt @ 7150-6980' WOC-Tag
4. M&P 75sx cmt @ 5410-5255' WOC-Tag
5. M&P 60sx @ 3635-3500' WOC-Tag
6. M&P 125 Sx @ 1850-1575' WOC-Tag
7. Perf 9-5/8" csg @ 408', sqz 330sx cmt to surface
10# MLF between plugs

OXY USA Inc. - Proposed
Saik #1
API No. 30-015-20971

330sx @ 408'-Surface

125sx @ 1850-1575' WOC-Tag

60sx @ 3635-3500' WOC-Tag

75sx @ 5410-5255' WOC-Tag

65sx @ 7150-6980' WOC-Tag


CIBP @ 9384' w/ 30sx

3/96-CIBP @ 10100' w/ 35' cmt

3/96-CIBP @ 10375' w/ 35' cmt

3/96-CIBP @ 11000' w/ 35' cmt


PB-11665'

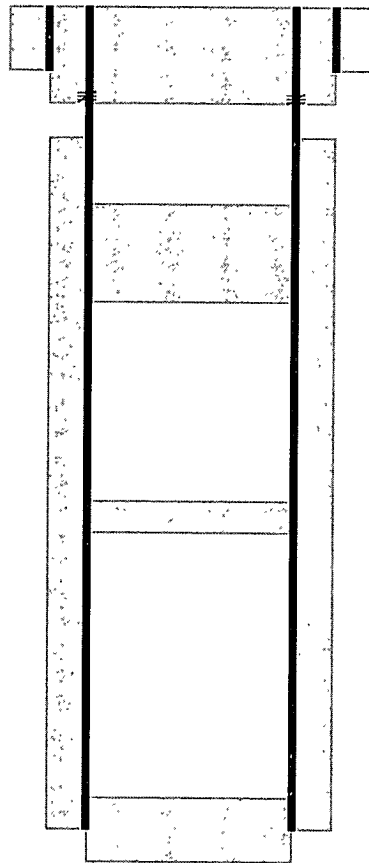

Perf @ 408'

17-1/2" hole @ 358'
13-3/8" csg @ 358'
w/ 380sx-TOC-Surf-Circ

12-1/4" hole @ 5360'
9-5/8" csg @ 5360'
w/ 1150sx-TOC-1100'-TS

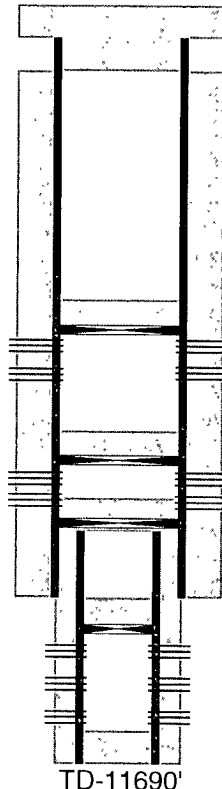

Cut & Pull Csg @ +/- 7100'

Perfs @ 9434-9713"

8-3/4" hole @ 10500'
7" csg @ 10500'
w/ 575sx-TOC-7300'-TS


Perfs @ 10141-10326'

Perfs @ 11112-11611'

6-1/4" hole @ 11685
4-1/2" liner @ 10382-11685'
w/ 180sx-TOC-10382'-Circ

TD-11690'

OXY USA Inc. - Current
Saik #1
API No. 30-015-20971

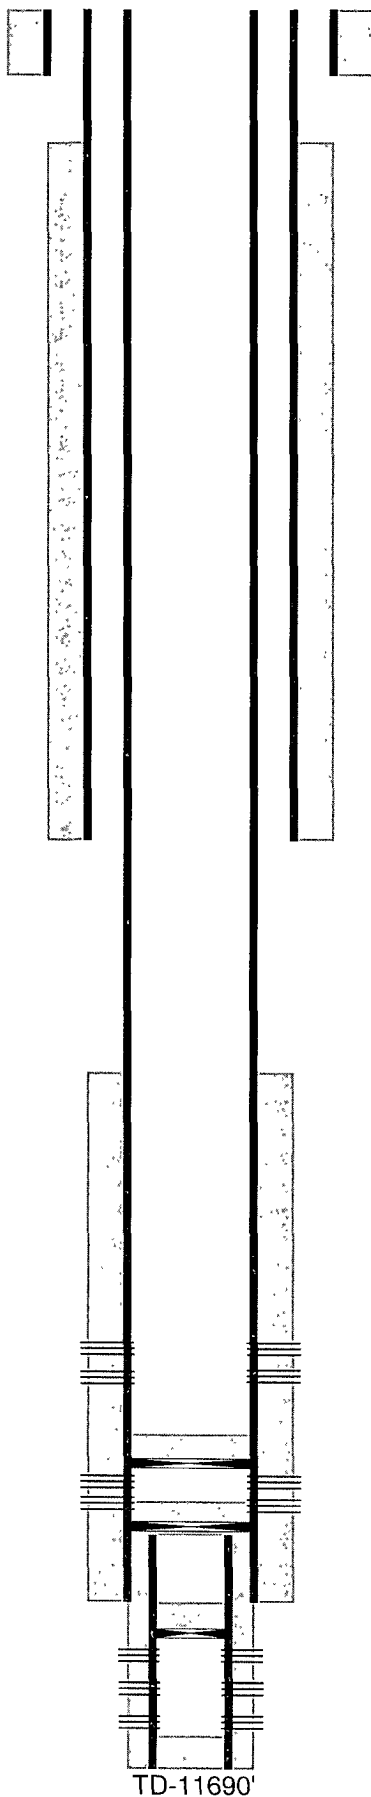

17-1/2" hole @ 358'
13-3/8" csg @ 358'
w/ 380sx-TOC-Surf-Circ

12-1/4" hole @ 5360'
9-5/8" csg @ 5360'
w/ 1150sx-TOC-1100'-TS

Perfs @ 9434-9713"
8-3/4" hole @ 10500'
7" csg @ 10500'
w/ 575sx-TOC-7300'-TS

Perfs @ 10141-10326'

Perfs @ 11112-11611'
6-1/4" hole @ 11685
4-1/2" liner @ 10382-11685'
w/ 180sx-TOC-10382'-Circ

3/96-CIBP @ 10100' w/ 35' cmt

3/96-CIBP @ 10375' w/ 35' cmt

3/96-CIBP @ 11000' w/ 35' cmt

PB-11665'

TD-11690'