

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)		WELL API NO. 30-005-63037
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator Hanson Operating Company, Inc.		6. State Oil & Gas Lease No. V-2982
3. Address of Operator P. O. Box 1515, Roswell, NM 88202-1515		7. Lease Name or Unit Agreement Name Quincy AMQ State
4. Well Location Unit Letter <u>E</u> : <u>1650</u> feet from the <u>North</u> line and <u>990</u> feet from the <u>West</u> line Section <u>12</u> Township <u>8 South</u> Range <u>27 East</u> NMPM Chaves County		8. Well Number #5
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3968' GR		9. OGRID Number 009974
Pit or Below-grade Tank Application <input type="checkbox"/> or Closure <input type="checkbox"/>		10. Pool name or Wildcat Acme San Andres Southeast
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____		
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Purpose to plug and abandon well as follows:

1. MIRU. Set cement tanks. POOH with rods and pump.
2. Circulate hole with 10# brine with 12.5# per barrel salt water gel.
3. Perforate 4 squeeze holes at ~~450'~~ 497'
4. Pump 100 sacks cement for solid plug from ~~450'~~ 497' to surface.
5. Clean and remediate location.
6. Set Dry Hole Marker.

**Notify OCD 24 hrs. prior
To any work done.**

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Carol J. Smith TITLE Production Analyst DATE 01/20/2010
Type or print name Carol J. Smith E-mail address: hanson@dfn.com Telephone No. 575-622-7330
For State Use Only

APPROVED BY: [Signature] TITLE _____ DATE 2/23/2010
Conditions of Approval (if any):

approval Granted providing work
is complete by 5/23/2010

WELLBORE DIAGRAM

WELL NAME	Quincy AMQ State #5	FIELD	Acme San Andres SE
LOCATION	1650' FNL & 990' FWL, Section 12-8S-27E, Chaves County, NM		
GL	3968'	ZERO	KB
SPUD DATE	1/18/1995	COMPLETION DATE	2/1/1995
COMMENTS:	API #30-005-63037		

17 1/2" Hole

12 1/4" Hole

7 7/8" Hole

CIBP at 2050'
35' Cement Cap

PBTD at 2206'

TD 2218'

13 3/8" at 5' Circulated

CASING PROGRAM

13 3/8"		5'
8 5/8"	24#	447'
5 1/2"	17#	2218'

8 5/8" at 447' with 250 sacks cement circulated

BEFORE

San Andres


Perfs: 2157'-2202' 36 holes

5 1/2" at 2218' with 300 sacks cement

Not to Scale
1/20/2010

WELLBORE DIAGRAM

WELL NAME	Quincy AMQ State #5	FIELD	Acme San Andres SE
LOCATION	1650' FNL & 990' FWL, Section 12-8S-27E, Chaves County, NM		
GL	3968'	ZERO	KB
SPUD DATE	1/18/1995	COMPLETION DATE	2/1/1995
COMMENTS:	API #30-005-63037		

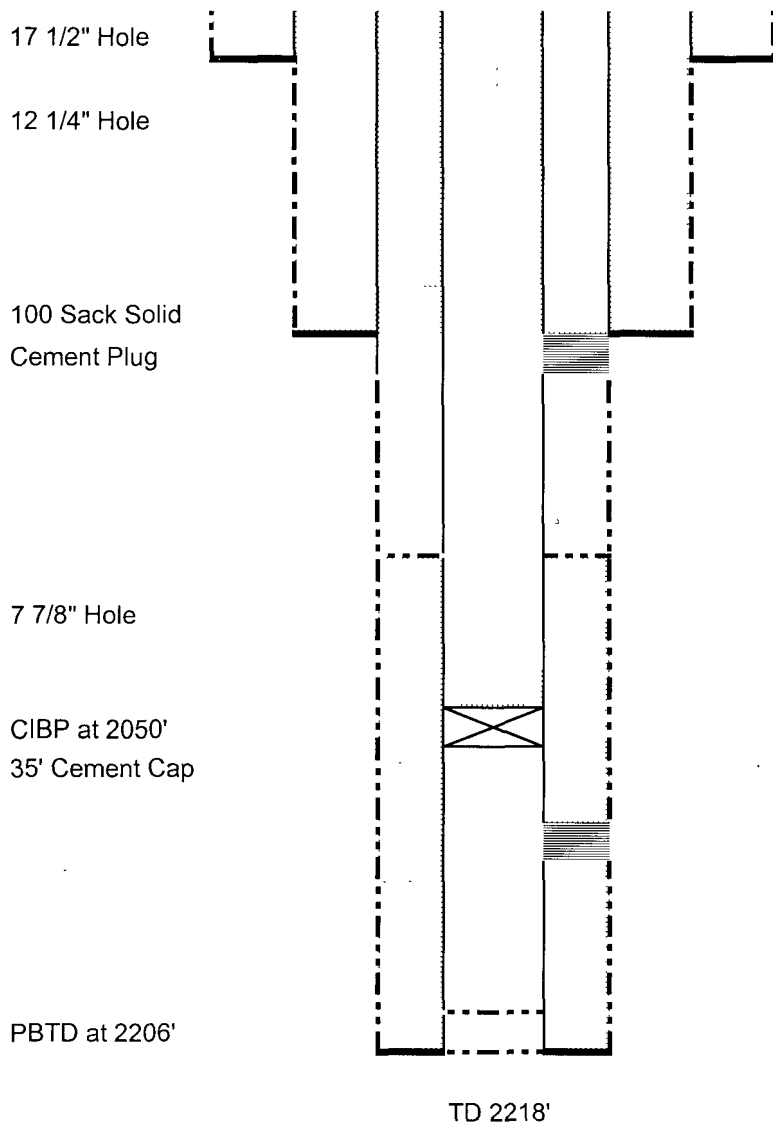

13 3/8" at 5' Circulated

CASING PROGRAM

13 3/8"		5'
8 5/8"	24#	447'
5 1/2"	17#	2218'

8 5/8" at 447' with 250 sacks cement circulated

Perforate at ~~450'~~ 497' 4 holes

AFTER

San Andres

Perfs: 2157'-2202' 36 holes

5 1/2" at 2218' with 300 sacks cement

Not to Scale
1/20/2010