
	Submit 3 Copies To Appropriate District	State of New Mexico		Form C-103	
	Office 8	Minerals and Natural Resou	rces	May 27, 2004	
•	1625 N. French Dr., Hobbs, NM 88240 District II		WELL 30,005	API NO. -62985	
	, , , , , , , , , , , , , , , , , ,	till 1220 South St. Francis Dr.		cate Type of Lease	
	1000 Rio Brazos Rd., Aztec, NM 87410			STATE STATE	
	District IV 1220 S St Francis Dr., Santa Fe, NM 87505	Santa Fe, NM 87505	6. State V-2982	e Oil & Gas Lease No.	
	SUNDRY NOTICES AND REP (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR T	O DEEPEN, OR PLUG BACK TO A	7. Leas	e Name or Unit Agreement Name	
	DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)  1. Type of Well: Oil Well		Quinc	y AMQ State	
	1. Type of Well. On Well Z Gas Well Z G		4	l Number	
-	2. Name of Operator	RECEIVED	#4	RID Number	
1	Hanson Operating Company, Inc.	FEB 1 8 2010	009974		
Ì	3. Address of Operator	TED 10 ZUIU	1	ol name or Wildcat	
	P. O. Box 1515, Roswell, NM 88202-1515	NMOCD ARTESIA	Acme S	San Andres Southeast	
4. Well Location					
Unit Letter E: 2310 feet from the North line and 990 feet from the West line					
Section 12 Township 8 South Range 27 East NMPM Chaves County					
	Section 12 Township 8 South Range 27 East NMPM Chaves County  11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3952' GR  Pit or Below-grade Tank Application □ or Closure □				
- 1	Pit typeDepth to GroundwaterDistance from nearest fresh water wellDistance from nearest surface water				
Pit Liner Thickness: mil Below-Grade Tank: Volumebbls; Construction Material					
12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data					
	NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:				
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ REMEDIAL WORK ☐ ALTERING CASIN TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ COMMENCE DRILLING OPNS.☐ P AND A				ALTERING CASING	
	TEMPORARILY ABANDON				
	OTHER:				
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of					
	starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.				
Purpose to plug and abandon well as follows:					
Tulpose to plug and abandon well as follows.					
1. MIRU. Set cement tanks. POOH with rods and pump.					
2. Set CIBP at 2050' with 35' cement cap.					
	3. Circulate hole with 10# brine with 12.5# per barrel salt water gel.				
	4. Perforate 4 squeeze holes at 450°. 498′				
	5. Pump 100 sacks cement for solid plug from 450' to surface.				
	6. Clean and remediate location. 498'				
	7. Set Dry Hole Marker.				
	•				
				/	
	Molth, OCD 04 has main				
	Notify OCD 24 hrs. prior				
	To any work done.				
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade					
tank has been/will be constructed or closed according to NMOCD guidelines \( \sigma\), a general permit \( \sigma\) or an (attached) alternative OCD-approved plan \( \sigma\).					
SIGNATURE COVOL G. Smeth TITLE Production Analyst DATE 01/22/2010					
Type or print name Carol J. Smith E-mail address: hanson@dfn.com Telephone No. 575-622-7330					
	For State Use Only			, ,	

APPROVED BY: Conditions of Approval (if any):

TITLE Approval Crantos

DATE 2/23/2010

## WELLBORE DIAGRAM

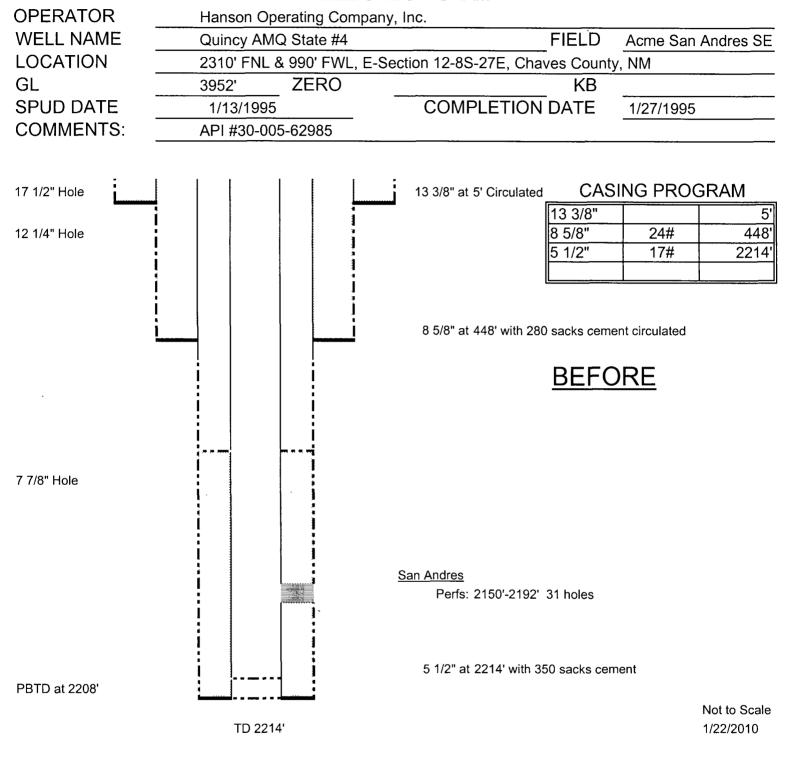

## WELLBORE DIAGRAM

**OPERATOR** Hanson Operating Company, Inc. **WELL NAME** FIELD Quincy AMQ State #4 Acme San Andres SE **LOCATION** 2310' FNL & 990' FWL, E-Section 12-8S-27E, Chaves County, NM GL **ZERO KB** 3952' **COMPLETION DATE** SPUD DATE 1/13/1995 1/27/1995 **COMMENTS:** API #30-005-62985 **CASING PROGRAM** 17 1/2" Hole 13 3/8" at 5' Circulated 13 3/8" 8 5/8" 24# 448 12 1/4" Hole 5 1/2" 17# 2214 100 Sack Solid 8 5/8" at 448' with 280 sacks cement circulated Perforate at 450' 4 holes Cement Plug 498 **AFTER** 7 7/8" Hole CIBP at 2050' 35' Cement Cap San Andres Perfs: 2150'-2192' 31 holes 5 1/2" at 2214' with 350 sacks cement PBTD at 2208' Not to Scale

1/22/2010

TD 2214'