

Submit 1 Copy To Appropriate District Office
District I
1625 N French Dr, Hobbs, NM 88240
District II
1301 W Grand Ave, Artesia, NM 88210
District III
1000 Rio Brazos Rd, Aztec, NM 87410
District IV
1220 S St Francis Dr, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-005-61818
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. V-132
7. Lease Name or Unit Agreement Name Roadrunner VY State
8. Well Number 1
9. OGRID Number 025575
10. Pool name or wellcat Pecos Slope; Abo

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 South Fourth Street, Artesia, NM 88210

4. Well Location
Unit Letter O : 660 feet from the South line and 1980 feet from the East line
Section 6 Township 8S Range 27E NMPM Chaves County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4007' GR

RECEIVED
MAY 06 2010
NMOCD ARTESIA

RECEIVED
MAY 06 2010
NMOCD ARTESIA

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimates of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Notify OCD 24 hrs prior to any work done.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU WSU. RU any safety equipment as needed. No casing recovery will be attempted.
2. Spot a 25 sx Class "C" cement plug from 4694'-4994'. This puts a 100' plug across the perfs and across top of the Abo. WOC and tag plug.
3. Perforate and spot a 40 sx Class "C" cement plug from 2495'-2595'. This puts a 100' plug across top of the Glorieta, inside and outside casing. *WOC TAG*
4. Perforate and spot a 40 sx Class "C" cement plug from 1150'-1250'. This puts a 100' plug across surface casing shoe, inside and outside casing. WOC and tag plug.
5. Perforate and spot a 25 sx Class "C" cement plug from 60' up to surface, inside and outside casing.
6. Remove all surface equipment, weld dry hole marker and clean location as per regulations.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE May 4, 2010

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY: Phil Hansen TITLE Approval Granted providing work is complete by 8/10/2010 DATE 5/10/2010
Conditions of Approval (if any):

WELL NAME: Goodrunner VY 1 FIELD AREA: Pecos Slope Abo
 LOCATION: 660' E 1780' E 06-85-22E, Chaves Co, NM
 GL: 4008 ZERO: _____ AGL: _____
 KB: _____ ORIG. DRLG./COMPL. DATE: _____
 COMMENTS: Spud: 11-14-82
Comp: 1-8-83

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SET
20" Conductor	40'
10 3/4" 40.5# J-55	1200'
4 1/2" 9.5# J-55	5398'
2 3/8" 11.5# J-55	4522'

BEFORE

Perfs 4789-4804' Acidized w/100% gel
 7 1/2% MOD 101 acid + 10 balls


Perfs 5142-5188' Acidized w/150% gel
 7 1/2% MOD 101 acid + 12 balls

Perfs 4789-5188' Treated w/400% gel
 7 1/2% MOD 101 acid + 34 balls; SF
 w/40,000 gal gel KCL water +
 55,000# 20/40 sand

TOL: 4,050', CBL

Fm: tops:

San Andres : 1343'
 Glorieta : 2545'
 Abo : 4744'

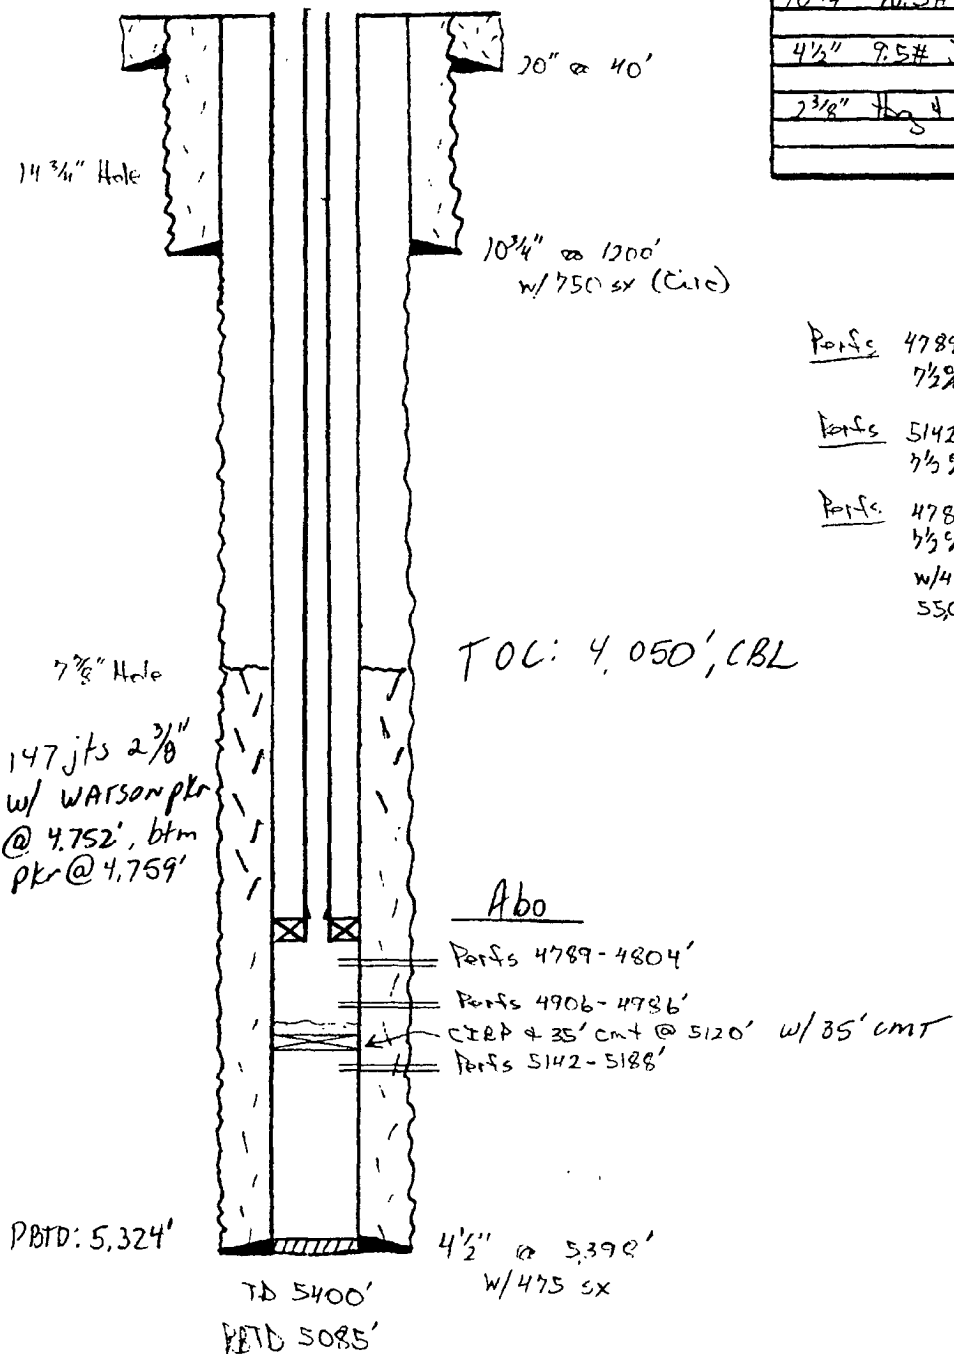


- SKETCH NOT TO SCALE -

REVISED: 4-23-98 *JD*

WELL NAME: Peardunner VY 1 FIELD AREA: Pecos Slope Abo
 LOCATION: 660' E 1780' E 0 6-85-27E, Chaves Co, NM
 GL: 4008 ' ZERO: _____ ' AGL: _____ '
 KB: _____ ' ORIG. DRLG./COMPL. DATE: _____
 COMMENTS: Spud: 11-14-82
Cmpl: 1-8-83

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SET
20" Conductor	40'
10 3/4" 40.5# J-55	1200'
4 1/2" 9.5# J-55	5398'

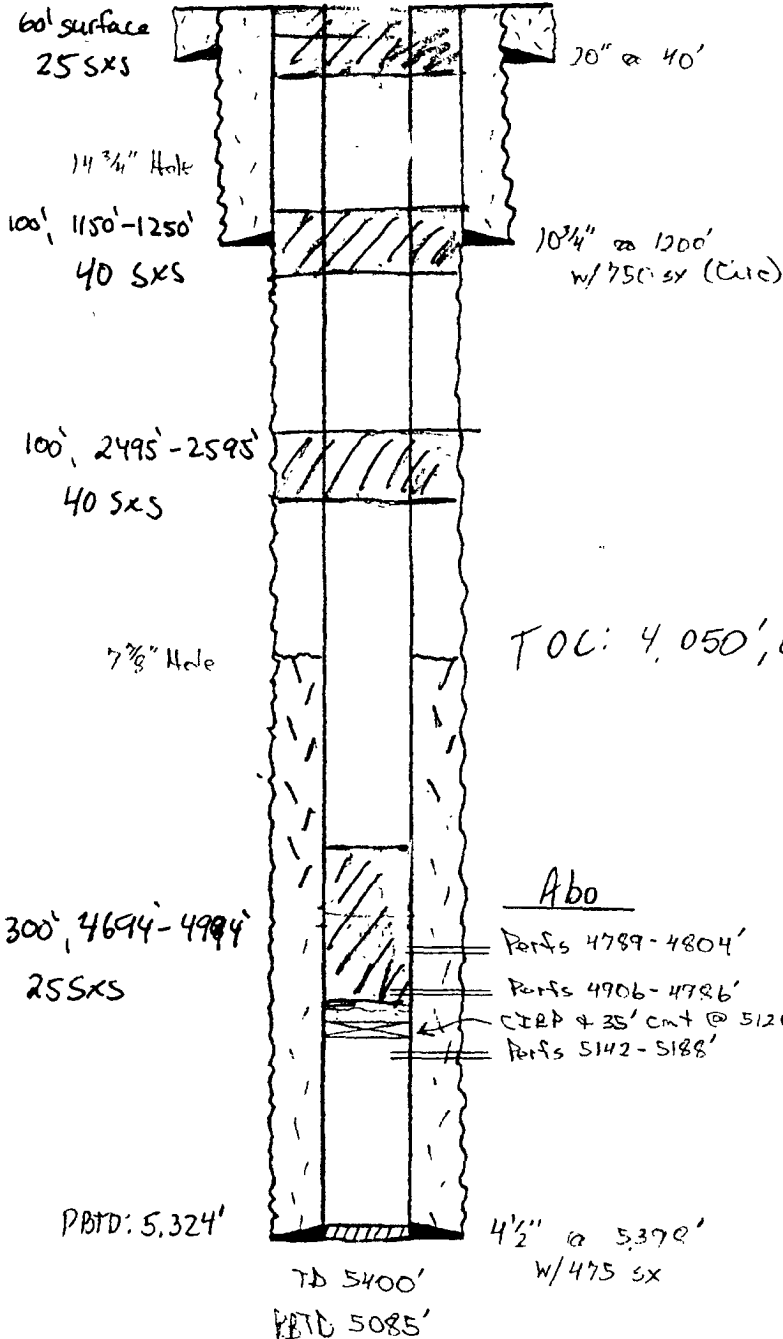

AFTER

Perfs 4789-4804' Acidized w/1000 gal
 7 1/2% AOB 101 acid + 10 balls
 Perfs 5142-5188' Acidized w/1500 gal
 7 1/2% AOB 101 acid + 12 balls
 Perfs 4789-5188' Treated w/4000 gal
 7 1/2% AOB 101 acid + 34 balls; SF
 w/40,000 gal agl KCL water +
 55,000# 20/40 sand

Fm. to PS

San Andres : 1343'
 Glorieta : 2545'
 Abo : 4744'

- SKETCH NOT TO SCALE -

REVISED: 4-23-98 dl
4-8-10 MMFH