
Submit 1 Copy To Appropriate District Office	State of New Mexico	Form C-103
District I	Energy, Minerals and Natural Resources	October 13, 2009
1625,N French Dr , Hobbs, NM 88240 District II		WELL API NO. 30-015-21863
1301 W Grand Ave, Artesia, NM 88210	OIL CONSERVATION DIVISION	5. Indicate Type of Lease
<u>District III</u> 1000 Rio Brazos Rd , Aztec, NM 87410	1220 South St. Francis Dr.	STATE FEE 🖂
<u>District IV</u>	Santa Fe, NM 87505	6. State Oil & Gas Lease No.
1220 S. St Francis Dr , Santa Fe, NM 87505		
	ES AND REPORTS ON WELLS	7. Lease Name or Unit Agreement Name
	ALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A	NDDUP Unit RECEIVED
PROPOSALS.)	ATION FOR PERMIT" (FORM C-101) FOR SUCH	8. Well Number
	Gas Well Other	16 JUN - 8 2010
2. Name of Operator		9. OGRID Number
Yates Petroleum Corporation 3. Address of Operator		10. Pool name or Wildcat
105 South Fourth Street, Artesia, NM 88210		Dagger Draw; Upper Penn, North
4. Well Location		
Unit Letter H : 1980 feet from the North line and 990 feet from the East line		
Section 17 Township 19S Range 25E NMPM Eddy County		
	11. Elevation (Show whether DR, RKB, RT, GR, ed	
	3522'GR	
12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data		
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:		
PERFORM REMEDIAL WORK	PLUG AND ABANDON ☑ REMEDIAL WO	·
TEMPORARILY ABANDON	CHANGE PLANS COMMENCE D	Notify OCD 24 hts. prior \Box
PULL OR ALTER CASING	MULTIPLE COMPL CASING/CEME	To any work done.
DOWNHOLE COMMINGLE		to dily work done.
OTHER:	□ OTHER:	. П
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date		
of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of		
proposed completion or recompletion.		
Yates Petroleum Corporation plans to plug and abandon this well as follows:		
1. NU BOP. Rig up any safety equipment as needed. No casing recovery will be attempted.		
 Set a CIBP at 7726' with 35' cement on top. This will place a plug over open Canyon perforations. Spot a 160' cement plug from 6350'-6510'. This will leave a plug across Wolfcamp top. 		
4. Spot a 140' cement plug from 4660'-4800'. This will leave a plug across Abo top.		
5. Spot a 120' cement plug from 2323'-2443'. This will leave a plug across Glorieta top.		
6. Spot a 150' cement plug from 1025'-1175'. WOC and tag plug, reset if necessary. This will leave a plug across intermediate casing shoe 7. Spot a 100' cement plug from 315'-415'. WOC and tag plug, reset if necessary. This will leave a plug across surface casing shoe		
8. Spot a 100' cement plug to the surface. WOC and tag plug, reset if necessary. This will leave a 100' surface plug.		
9. Remove all surface equipment and weld dry hole marker per regulations.		
Due to the volume of wells we currently have plans to plug, both State/Fee and Federal, Yates Petroleum respectfully requests a time frame of 1 year to		
have commenced plugging operations and for this notice of intent to be in affect		
Spud Date:	Rig Release Date:	
I hereby certify that the information above is true and complete to the best of my knowledge and belief.		
Thereby certify that the information above is true and complete to the best of my knowledge and bench.		
SIGNATURE (Juna)	TITLE Regulatory Complian	ce Supervisor DATE June 2, 2010
T. W.		
Type or print name Tina Huert For State Use Only	a E-mail address: tinah@yatespetrole	eum.com PHONE: <u>575-748-4168</u>
MAIL OSE OHLY	ρ	
APPROVED BY:	TITLE Approval Granted pro	oviding work DATE 6/14/2010
Conditions of Approval (if any):	is complete by 5//	4/2011

Submit 1 Copy To Appropriate District

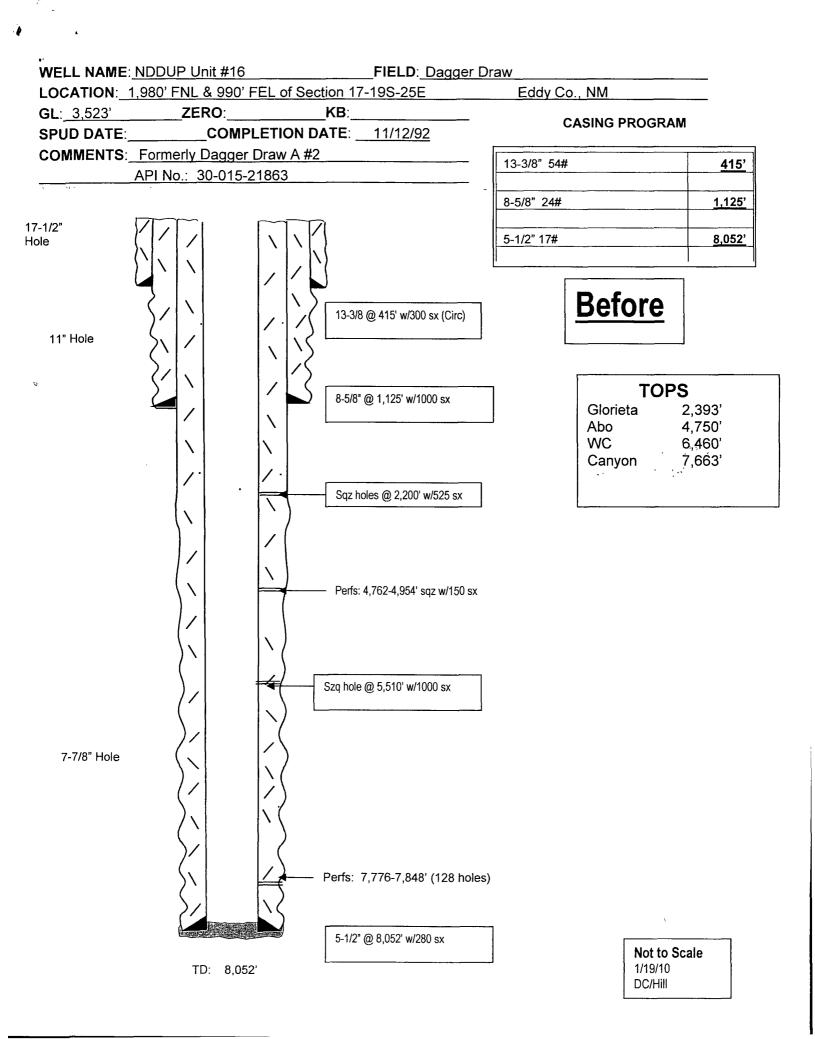

WELL NAME: NDDUP Unit #16 FIELD: Dagger Draw LOCATION: 1,980' FNL & 990' FEL of Section 17-19S-25E Eddy Co., NM **GL**: 3,523' **ZERO**: KB: **CASING PROGRAM** SPUD DATE: COMPLETION DATE: 11/12/92 **COMMENTS**: Formerly Dagger Draw A #2 13-3/8" 54# 415' API No.: 30-015-21863 8-5/8" 24# 1,125' 17-1/2" 100' plug 0-100' 5-1/2" 17# 8,052' Hole 100' plug 315-415' After 13-3/8 @ 415' w/300 sx (Circ) 11" Hole 8-5/8" @ 1,125' w/1000 sx **TOPS** Glorieta 2,393' 450' plug 1,025-1,175' Abo 4,750' WC 6,460' 120' plug 1,948-2,068' 7;663' Canyon Sqz holes @ 2,200' w/525 sx 140' Plug 4,660-4,800' across Abo top Perfs: 4,762-4,954' saz w/150 sx Szq hole @ 5,510' w/1000 sx 7-7/8" Hole 160' plug from6,350-6,510' across WC CIBP @ 7,726' w 5' cmt plug Perfs: 7,776-7,848' (128 holes) 5-1/2" @ 8,052' w/280 sx Not to Scale TD: 8,052' 1/19/10 DC/Hill