

Conditions of Approval (if any):

OXY USA WTP LP  
Indian Basin 32 State #7  
30-015-33030  
Sec. 32-21S-24E  
Eddy County, New Mexico

### **Proposed Contingency Plug and Abandon**

TD-8780 PBTD-3759 Perfs-3170-3202, 2900-2980 CIBP: 2850'

All csg has cement behind pipe to surface. Use 10# mud between plugs.

Plugs #1 through #4 will already be set as part of the Plug back and Recompletion plan.  
(Information Only)

PBTD: 8683' Perfs: 7859-8476' CIBP: 7809

Plug #1: CIBP @ 7809' w/ 25sx-100' cmt, TAG

Plug #2: 30sx-140'+/- from 7354-7214' TAG (Wolfcamp)

Plug #3: 30sx-140'+/- from 4470-4330'

Plug #4: 30sx-140'+/- from 3909-3759' TAG (Bone Springs)

(New Plugs to P&A Well)

\*Contact NMOCD ??hours before plugging

MIRU

Plug #5: CIBP @ 2850' w/ 35sx-145'+/- from 2850-2705' TAG (Glorieta)

Plug #6: 25sx-100' from 1861-1761' TAG (csg shoe)

Plug #7: 25sx-100' from 1270-1170' TAG (San Andres)

Plug #8: 130sx-533'+/- from 533'-Surface

**Notify OCD 24 hrs. prior  
to any work done.**

OXY USA WTP LP - Proposed  
Indian Basin 32 State #7  
API No. 30-015-33030

130sx @ 533' - Surface

25sx @ 1270-1170' WOC-Tag

25sx @ 1861-1761' WOC-Tag

35sx @ 2850-2705' WOC-Tag

30sx @ 3909-3759' WOC-Tag  
PBTD @ 3759


30sx @ 4470-4330'

30sx @ 7354-7214' WOC-Tag

25sx @ 7709-7809' WOC-Tag

PB-8683'

TD-8780'

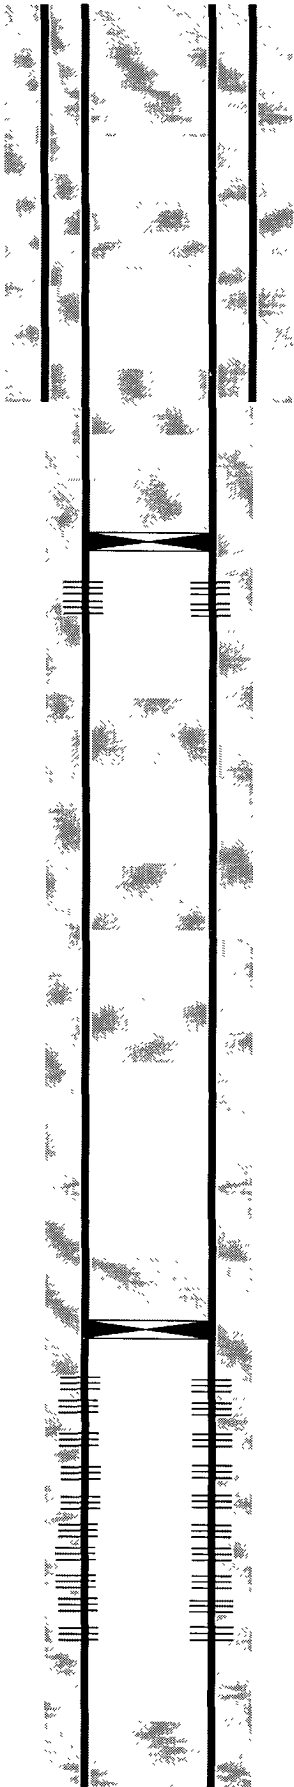

12-1/4" hole @ 1811'  
9-5/8" csg @ 1811"  
w/ 1540sx-TOC-Surf-Circ

Queen @ 483'

San Andres @ 1220'

Glorieta @ 2755'

CIBP @ 2850'  
Perfs @ 2900-2980' & 3170-3202'

Bone Springs @ 3859'

Wolfcamp @ 7304'

CIBP @ 7809'

8-3/4" hole @ 8780'  
7" csg @ 8780'  
w/ 1254sx-TOC-Surf-Circ

Perfs @ 7859-8476'