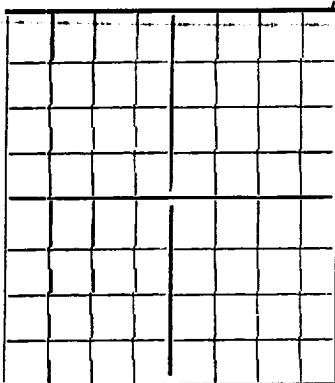


NEW MEXICO OIL CONSERVATION COMMISSION

AREA 640 ACRES
LOCATE WELL CORRECTLY

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE

The Bay Petroleum Corporation

Box 1785, Midland, Texas

Company or Operator

Address

Snowden & McSweeney

Well No.

1

in NE SW SW

of Sec.

32

T. 17-S

Lease

R. 22-E

N. M. P. M.

Lase Hills

Field,

Hady

County.

Well is 990 feet south of the north line and 900 feet west of the East line of Section 32

If State land the oil and gas lease is No. B-2023 Assignment No. 4

If patented land the owner is , Address

If Government land the permittee is , Address

The Lessee is Snowden & McSweeney , Address Fort Worth, Texas

Drilling commenced May 14 19 44 Drilling was completed August 7, 19 45

Name of drilling contractor Harvey E. Yates , Address Artesia, New Mexico

Elevation above sea level at top of casing 3582 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2500 to 2520 No. 4, from 3014 to 3029

No. 2, from 2650 to 2660 No. 5, from to

No. 3, from 2915 to 2940 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8-5/8	24#	8-V	LN	360				
5 1/2"	14#	8-R	LN	2700	Texas			Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8-5/8	360	100	Pump & Plug		
8"	5 1/2"	2700	100	Pump & Plug		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	1500 Gals	8/9/44	2700-TD	3104
		Acid	3000 "	8/10/44	"	
		Acid	5000 "	8/11/44		

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from Surface feet to 3104 feet, and from feet to feet

PRODUCTION

Put to producing 9/2, 19 44.

The production of the first 24 hours was 8 barrels of fluid of which 90 % was oil; 10 % emulsion; % water; and % sediment. Gravity, Be. 34°

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

, Driller, Driller

, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Midland, Texas

2/23/45

Subscribed and sworn to before me this 23

Name

day of February, 19 45

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Caliche
10	100	90	Red Rock
100	290	190	Red Rock & Gyp
290	300	10	Anhydrite
300	710	410	Salt
710	1010	300	Anhydrite & Red Rock
1010	1070	60	Anhydrite
1070	1180	80	Anhydrite & Red Rock
1180	1240	90	Anhydrite
1240	1285	45	Anhydrite & Red Rock
1285	1560	275	Anhydrite
1560	1685	125	Anhydrite & Red Rock
1685	1965	280	Anhydrite
1965	1995	30	Anhydrite & Red Rock
1995	2175	180	Anhydrite
2175	2307	132	Anhydrite & Red Rock
2307	2500	193	Lime
2500	2520	20	Sandy Lime
2520	2620	100	Lime
2620	2640	20	Sandy Lime
2640	3104 TD	464	Lime