
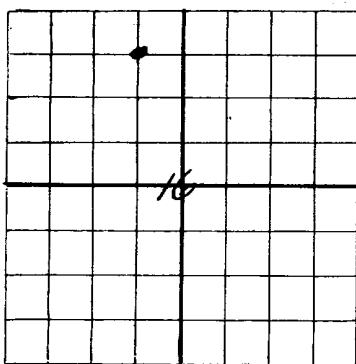


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD



HOBBS OFFICE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

The W-K Royalty Co., 335 West Lewis St., Wichita, Kansas

State "B"

Well No. 3

in NW of NW of Sec. 16

T. 17

R. 31, N. M. P. M. Grayburg-Jackson Field, Eddy County.

Well is 660 feet south of the North line and 660 feet west of the East line of NW 1/4 of Sec 16

If State land the oil and gas lease is No. 3105 B Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Fred Turner Jr. Address Midland, Tex

Drilling commenced April 15 19 39. Drilling was completed June 24 19 39

Name of drilling contractor Carper Drilling Co. Address Artesia, New Mex

Elevation above sea level at top of casing 3834 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3857 to 3858 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 3737 feet to 3805 feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	28	8	L.W.	628	Tex. Pat		None		Sur. Csg
7" OD	26	10	Smls	3063	Guide		None		Oil Strg.

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 5/8	628	50	Halliburton	15#	1/2 ton
8"	7"	3063	100	"	"	3 "

PLUGS AND ADAPTERS

Heaving plug—Material Rubber-Wood Length 18" Depth Set 3050'

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		NONE				

Results of shooting or chemical treatment Well neither shot or acidized

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3805 feet, and from feet to feet

PRODUCTION

Put to producing June 24 19 39

The production of the first 24 hours was 30 barrels of fluid of which 0 % was oil; 1 %

emulsion; 99 % water; and % sediment. Gravity, Be 0

If gas well, cu. ft. per 24 hours None Gallons gasoline per 1,000 cu. ft. of gas None

Rock pressure, lbs. per sq. in. None

EMPLOYEES

C.W. Hammond Driller Jim Hammond Driller

Pat Gormley Driller J. Nellis Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 26 th

Artesia N.M.

June 26, 1939

day of June 19 39

Name

Position

Dist. Supt.

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Surface
10	320	310	Red Bed
320	355	35	Red Rock & Sand
355	380	25	Red Bed & Gyp
380	412	22	Anhyd. & Shale
412	475	63	Lime & Gyp
475	588	113	Anhyd. & Red Bed
588	1535	947	Salt
1535	1753	218	Anhyd.
1753	1770	17	Red Rock & Sand
1770	2180	410	Anhyd.
2180	2190	10	Brown Lime (Show Gas)
2190	2210	20	Anhyd.
2210	2218	8	Brown Lime (Show Oil)
2218	2233	15	Br. Lime & Anhyd.
2233	2282	49	Anhyd.
2282	2350	68	Gray Lime
2350	2620	270	Anhyd. & Lime
2620	2657	37	Red Sand
2657	2882	225	Anhyd.
2882	2895	13	Brown Sand (Slight show oil) 2882-87'
2895	2930	35	Anhyd.
2930	2940	10	Red Sand
2940	2965	25	Anhyd. & Red Sand
2965	2977	12	" Brown Shale
2977	2990	13	" Sandy
2990	3000	10	Brown Lime
3000	3013	13	Anhyd. & Red Sand
3013	3030	17	Lime
3030	3041	11	" Sand
3041	3051	10	Anhyd. & Red Sand
3051	3053	2	Brown Shale
3053	3277	124	Lime (7" Casing set at 3063')
3177	3191	14	Sand & Lime - Hard
3191	3255	64	Lime (S.L.M. @ 3227')
3255	3261	6	Sandy Lime
3261	3325	64	Lime - White & Gray
3325	3353	28	Lime - Brown
3353	3485	122	Lime - White & Gray
3485	3493	28	Lime - Brown (S.L.M. At 3682')
3493	3676	183	Lime - White & Gray (Show Oil 3657-58')
3676	3682	16	Brown & Gray Lime - Flaky
3682	3805	124	Lime - Gray (Salt Water 3797' to 3805')

Total Depth 3805'