

WEIER DRILLING COMPANY
P. O. BOX 716
MONAHANS, TEXAS

RECEIVED SEP 21 1956 7:37 AM
OCC

NOV 1 1956

ALBUQUERQUE
OFFICE

Oil Conservation Commission
Box 2045
Hobbs, New Mexico

Gentlemen:

Enclosed please find approved copy of Form 9-331a covering our Foster Well No 5-A which we intend to plug in the near future.


This form is sent to you for your information and the removal of the well from your proration schedule.

Very truly yours,

WEIER DRILLING COMPANY

By: A. D. Weier
A. D. Weier

ADW:jc

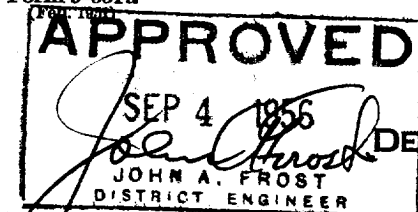

(SUBMIT IN TRIPLICATE)

 UNITED STATES
 DEPARTMENT OF THE INTERIOR
 GEOLOGICAL SURVEY
Land Office Las CrucesLease No. 049998-AOffice Poster 5-A

24 AM 7:37

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 30, 1956

Well No. 5-A is located 2310 ft. from N line and 650 ft. from E line of sec. 17SE NE 17 (4 Sec. and Sec. No.) 17 (Twp.) 31E (Range) (Meridian)Fron (Field) Eddy (County or Subdivision) New Mexico (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

This well was drilled in April 1950 to TD 2160' in the Seven Rivers Sand. Pay section was very thin so that no oil string was ever set-packer was used instead. This well has only made 4 Bbls. per month for past 3-4 months. We propose to pull tubing, spot 10 sacks of cement at 2,060', fill hole with mud to 522', spot 5 sacks of cement and leave 522' of 7" casing in hole, fill such pipe with mud and place regulation marker.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Water Drilling Co.Address Box 716Monahans, TexasBy A. S. WeierTitle President