


Form 9-330

U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 029396 (a)
LEASE OR PERMIT TO PROSPECT Turner

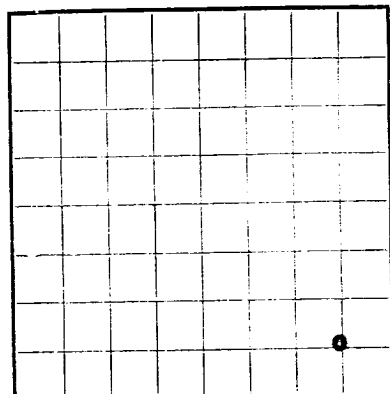

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Southern Production Company, Inc. Address Fort Worth, Texas
Lessor or Tract Turner Field Fren State N. Mex.
Well No. 29-A Sec. 18 T. 17S R. 31E Meridian NMPM County Eddy
Location 705 ft. N. of S. Line and 660 ft. W. of E. Line of Sec. 18 Elevation 3694'
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.
Signed Harold C. Curry

Date June 23, 1953 Title Agent

The summary on this page is for the condition of the well at above date.

Commenced drilling May 4, 1953, 19 Finished drilling June 3, 1953, 19

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1933 to 1938 No. 4, from _____ to _____
No. 2, from 1967 to 1973 No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 420 to 425 No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
9 5/8	25.5	plain end	Armed	556	common				
7	1910								
5 1/2	1977								

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
9 5/8	556	50	Plug		
7	1910	100	Plug		
5 1/2	1977' - 78.4'	set on bottom and perforated at pay zones - this is a liner extending up into the 7" casing.			

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
Well was shot with 253 quarts of solidified nitro-glycerine from 1932' to 1977' and cleaned out to bottom after shot.						

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 1977 feet, and from _____ feet to _____ feet

DATES

_____, 19 Put to producing June 4, 1953, 19

The production for the first 24 hours was 20 barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, °Bé, 36

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

G. C. Pratt _____, Driller Jim Hammond _____, Driller
G. W. Baker _____, Driller John Hammond _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	100	100	Sand
100	265	165	Red Bed and Anhy
265	524	259	Anhy & Red Beds - water 420-425'
524	1250	726	Salt
1250	1930	680	Anhy
1930	1933	3	Lime
1933	1938	5	Dolomite - OIL PAY
1938	1964	26	Anhy
1964	1967	3	Lime
1967	1973	6	Dolomite - OIL PAY
1973	1977	4	Anhy - Total Depth

1000

10/10/1952

LE2

10072 02ED

Робит. катэгорыя	Робит. груп	Дата	Спадчына	Будынык № 2	Будынык № 1	Ст. № 1
------------------	-------------	------	----------	-------------	-------------	---------

PLUGS AND ADAPTERS

[illegible]

HISTORY OF OIL OR GAS WELL

16-43094-2 U. S. GOVERNMENT PRINTING OFFICE

[illegible]

DATE	NO. OF	TYPE	STATION	NAME OF	DATE	NO. OF	TYPE	STATION	NAME OF
1944	1001	1001	1001	1001	1944	1001	1001	1001	1001

UNCLASSIFIED

Среднее значение $\rho_{\text{дв}}(z)$

The summary on the back is for the condition of the boat as received.

JLH: - - - - - 68410

၇၁၆၂၆၄

The information given herein is a complete and correct record of the work and all work done thereon.

INVESTIGATION OF THE EFFECTS OF THE
FEDERAL BUREAU OF INVESTIGATION ON THE
LIVES OF AMERICAN CITIZENS

CONFIDENTIAL - SECURITY INFORMATION

ГОЛАЕ МЕГГ СОВЕСТГА

[illegible]

GEOLOGICAL SURVEY

DEPARTMENT OF THE INTERIOR

UNITED STATES

TYPE OF DEVIATION IN PROJECT TITLES

REBIVT NUMBER 00000000

U.S. POST OFFICE