


DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: TURNER "A" #30			FIELD: GRAYBURG-JACKSON			
LOCATION: 1880'FSL & 660'FEL, SEC 18-T17S-R31E			COUNTY: EDDY			STATE: NM
ELEVATION: GL=3688'; KB=UNK			SPUD DATE: 03/26/53		COMP DATE: 04/28/53	
API#: 30-015-05228		PREPARED BY: C.H. CARLETON			DATE: 10/10/97	
	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 530'	8 5/8"	28#			10"
CASING:	0' - 1901'	7"	20#			8"
CASING:	1882' - 1969'	5 1/2"	14#			6"
TUBING:	UNK - UNK	2 3/8"	4.7#		EUE 8rd	
TUBING:						

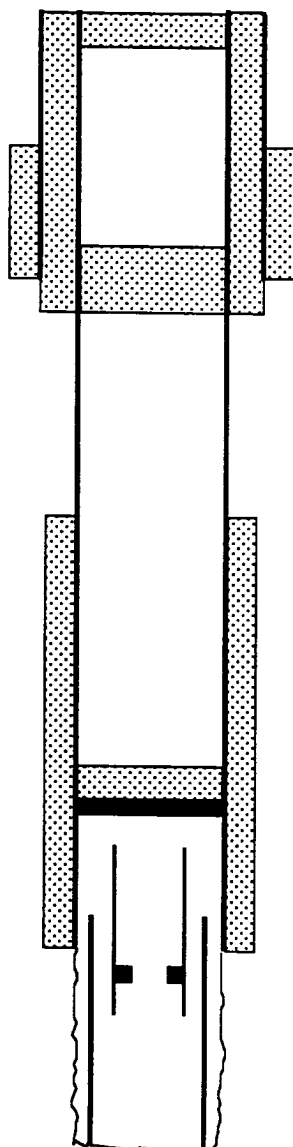

☐ CURRENT

☒ PROPOSED

OPERATOR: DEVON ENERGY CORPORATION(NEVADA)

CEMENT PLUG: 0' - 50'

CEMENT PLUG: 480' - 580'

8 5/8" CASING @ 530' W/50 SXS. TOC @ 300'(calc)

PERFORATE 7" CASING @ 580'

NOTE: 9.5ppg MUD TO BE SPOTTED BETWEEN CEMENT PLUGS.

CIBP +50' ABOVE TUBING STUB, CAP WITH 50' CEMENT.

CUT 2 3/8" TUBING @ FREEPOINT

7" CASING @ 1901' W/100 SXS. TOC @ 1100'(calc)

PERFORATIONS: 1927' - 1969' (W/260 QTS NITRO)

5 1/2" SLOTTED LINER @ 1882' - 1969' LANDED (NOT CEMENTED)
TD @ 1969'

NOTE: FOR CALCULATED CEMENT TOPS A YIELD OF 1.32 CU FT/SX AND 50% FILLUP WERE ASSUMED.