


# DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

|   |            |                            |                                       |       |                     |           |
|---|------------|----------------------------|---------------------------------------|-------|---------------------|-----------|
| WELL NAME: TURNER "A" #22                       |            |                            | FIELD: GRAYBURG-JACKSON(SEVEN RIVERS) |       |                     |           |
| LOCATION: 2310'FNL & 1650'FWL, SEC 19-T17S-R31E |            |                            | COUNTY: EDDY                          |       |                     | STATE: NM |
| ELEVATION: GL=3646'; KB=UNK                     |            |                            | SPUD DATE: 08/04/48                   |       | COMP DATE: 10/21/48 |           |
| API#: 30-015-05247                              |            | PREPARED BY: C.H. CARLETON |                                       |       | DATE: 12/03/98      |           |
| <del>ITEM</del>                                 | DEPTH      | SIZE                       | WEIGHT                                | GRADE | THREAD              | HOLE SIZE |
| CASING:   | 0' - 491'  | 8 5/8"                     | 24#                                   |       |                     |           |
| CASING:   | 0' - 1855' | 5 1/2"                     | 14#                                   |       |                     |           |
| CASING:   |            |                            |                                       |       |                     |           |
| TUBING:   |            |                            |                                       |       |                     |           |
| TUBING:   |            |                            |                                       |       |                     |           |

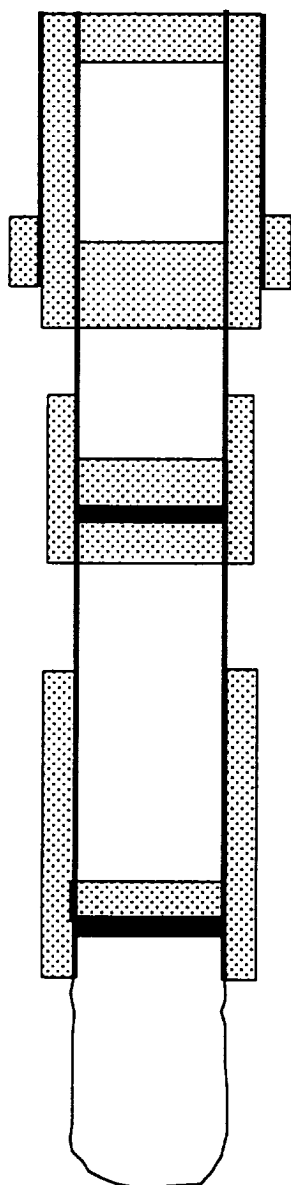

☐ CURRENT

☒ PROPOSED

OPERATOR: DEVON ENERGY CORPORATION(NEVADA)

CEMENT PLUG: 0' - 50'

CEMENT PLUG: 440' - 540'

8 5/8" CASING @ 491' W/30 SXS. TOC @ 410' (calc)

PERFORATE 5 1/2" CASING @ 540'

CEMENT RETAINER @ 1190', PUMP 100 SXS BELOW & CAP W/50' CMT.  
PERFORATE 5 1/2" CASING @ 1240'

NOTE: 1) 9.5 PPG MUD TO BE SPOTTED BETWEEN CMT PLUGS  
2) BASE OF SALT @ 1190'

CAP BRIDGE PLUG W/50' CEMENT

BAKER "P-1" BRIDGE PLUG @ 1811'

5 1/2" CASING @ 1855' W/75 SXS. TOC @ 1570' (calc)

OPEN HOLE: 1855' - 1925'

PBTD @ 1925'

TD @ 1940'

NOTE: FOR CALCULATED CEMENT TOPS A YIELD OF 1.32 CU FT/SX AND 50% FILLUP WERE ASSUMED.