

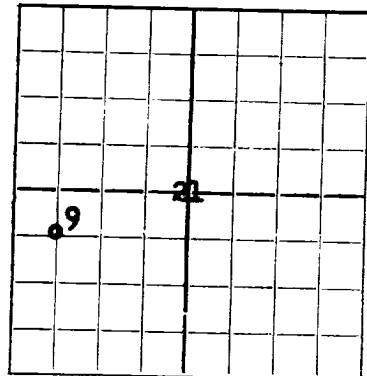
N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

30-045-05322

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Skelly Oil Company

Dow "B"

Well No. 9 Company or Operator in NW/4 SW/4 of Sec. 21, T. 17S

R. 31E, N. M. P. M., Grayburg-Jackson Field, Eddy County.

Well is 3300 feet south of the North line and 4620 feet west of the East line of Section 21

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is H. M. Dow Address

The Lessee is Skelly Oil Co. Address Tulsa, Oklahoma

Drilling commenced November 24 1945 Drilling was completed December 15 1945

Name of drilling contractor J. C. Clower Address Eunice, N.M.

Elevation above sea level at top of casing D.F. 3776 feet.

The information given is to be kept confidential until Not Confidential 19

OIL SANDS OR ZONES

No. 1, from 2065 to 2070 (G)	No. 4, from to
No. 2, from 2090 to 2103	No. 5, from to
No. 3, from 2119 to 2134	No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4"	45#	8V	LW	592	Tex. Pat.			
8-5/8"	28#	3R	SS	2084	Tex. Pat.			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11-1/4"	10-3/4"	600'	100	Halliburton -	preceded by mud	cir. to surface.
9-1/4"	8-5/8"	2090'	150	Halliburton -	preceded by mud	cir. to surface.

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	6"	SNG	100	12/22/45	2118-2135'	Total Depth.

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet.
Cable tools were used from Surface feet to 2139 feet, and from feet to feet.

PRODUCTION

Put to producing December 27 1945

The production of the first 24 hours was 42 barrels of fluid of which 100% was oil; % emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

T. P. Rogers Driller Driller
A. F. Smith Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 26th

day of October, 1951

Notary Public

My Commission expires Aug. 15, 1952

Hobbs, New Mexico - October 26, 1951

Place Date

Name J. C. Clower

Position Dist. Supt.

Representing Skelly Oil Co.

Company or Operator.

Address Box 38 - Hobbs, N.M.