

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

August 21, 1941

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico,

Place

Date

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

SKELLY OIL COMPANY

Lea "B"

Well No. 2 in CSW SW

Company or Operator

Lease

-son

of Sec. 23, T. 17 S., R. 31 E., N. M. P. M., Grayburg-Jack Field, Eddy County.

The well is 660 feet (N.) (S.) of the South line and 660 feet

(E.) (W.) of the West line of Section 23

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. . Assignment No. .

If patented land the owner is .


Address .

If government land the permittee is J.S. Lea - Permit No. 029418 (B)

Address .

The lessee is Skelly Oil Company

Address Hobbs, New Mexico

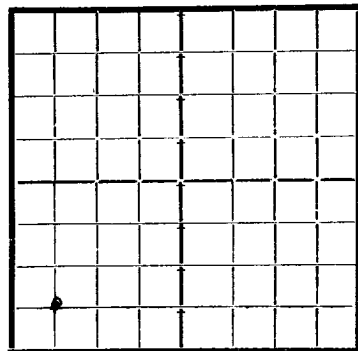

AREA 640 ACRES
LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows: Cable Tools

Top to total depth. Drilling Contractor is L. G. Ashley, Monahans, Texas

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: .

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
11-3/4"	8 5/8"	32#	Second Hand	620'	Cemented	100
8 1/4"	7"	22#	New	3250'	Cemented	200

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3400 feet.

Additional information: In cementing the 8 5/8" OD casing the cement shall be circulated back to bottom of cellar. Both strings of pipe, after cementing, shall be allowed sufficient time for cement to thoroughly set before drilling plug.

Approved 8-23-41, 19____
Except as follows:

Sincerely yours,

SKELLY OIL COMPANY
Company or Operator

By (Signed) J. N. Dunlavy

Position Dist. Superintendent

Send communications regarding well to

Name Skelly Oil Company

Address Hobbs, N.M.

OIL CONSERVATION COMMISSION,

By Roy Yarbrough

Oil and Gas Inspector

Title