

RECEIVED
APR 27 1966
U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICOUNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

2. TYPE OF WORK

DRILL ☐DEEPEN ☒PLUG BACK ☐

b. TYPE OF WELL

OIL
WELL ☒GAS
WELL ☐OTHER ☐SINGLE
ZONE ☐MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

Steady Oil Company

APR 28 1966

3. ADDRESS OF OPERATOR

Box 730 - Hobbs, New Mexico

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*

At surface

810' FSL & 660' FSL Section 23-17B-31E

At proposed prod. zone

Grayburg & San Andres

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

Seven miles Southwest of Maljamar, New Mexico

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)

-

16. NO. OF ACRES IN LEASE

1920

17. NO. OF ACRES ASSIGNED
TO THIS WELL

40

18. DISTANCE FROM PROPOSED LOCATION*

TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

19. PROPOSED DEPTH

3910'

20. ROTARY OR CABLE TOOLS

Workover Rig

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3875' DF

22. APPROX. DATE WORK WILL START*

Immediately

23.

Present

XXXXXXXX CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
10"	8-5/8"	24 1/2	799'	100 sacks
8"	5-1/2"	15.5 1/2	3784'	375 sacks

Well is currently producing 3784-3840' in open hole from the San Andres Formation.

We propose to deepen well 70', perforate 5-1/2" OD casing 3300-3484', 3500-3618' in the Grayburg and 3634-3746' in the San Andres as follows:

Move in and rig up Workover Rig. Pull rods and tubing. Deepen well 70' from 3840' to 3910'. Move out Workover Rig and move in Pulling Unit. Run Gamma Ray Neutron (Open Hole) Log. Acidize new open hole section of San Andres with 1000 gals. acid down 2-3/8" OD tubing. Treat new open hole San Andres with 20,000 gals. water and 20,000# sand, using 1500# salt and mothball block to block old open hole section. Swab and test lower San Andres through 2-3/8" OD tubing. Perforate Grayburg and San Andres Zones selectively as stated above. Isolate perforations from open hole, breakdown with approx. 3500 gals. acid & Sand-water Frac with 60,000 gals. water & 60,000# sand in 3 stages. Run tubing and rods and return well to production.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

(ORIGINAL
SIGNED)

H. E. Aab

SIGNED

TITLE

Dist. Superintendent

DATE

April 25, 1966

(This space for Federal or State office use)

PERMIT NO.


APPROVAL DATE

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

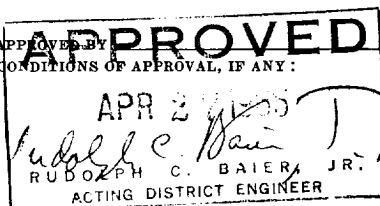

*See Instructions On Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, as indicated, on all types of lands and leases for appropriate action by either a Federal or a State agency, or both, pursuant to applicable Federal and/or State laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable State or Federal regulations concerning subsequent work proposals or reports on the well.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on this reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal or State agency offices.

Items 15 and 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective production zone.

Item 22: Consult applicable Federal or State regulations, or appropriate officials, concerning approval of the proposal before operations are started.

RECEIVED
JAN 10 1964
BUREAU OF LAND MANAGEMENT
WASHINGTON, D.C.