

NO. OF COPIES RECEIVED	6
DISTRIBUTION	
SANTA FE	/
FILE	/
U.S.G.S.	/
LAND OFFICE	/
OPERATOR	/

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-101
Revised 1-1-65

5A. Indicate Type of Lease	
STATE <input checked="" type="checkbox"/>	FEE <input type="checkbox"/>
5. State Oil & Gas Lease No.	
B-1266	

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. Type of Work		7. Unit Agreement Name	
b. Type of Well DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/> OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		8. Farm or Lease Name	
2. Name of Operator		9. Well No.	
Tenneco Oil Company		21	
3. Address of Operator		10. Field and Pool, or Wildcat	
Box 1031, Midland, Texas		Grayburg Jackson	
4. Location of Well		12. County	
UNIT LETTER J LOCATED 1980 FEET FROM THE east LINE		Eddy	
AND 1980 FEET FROM THE south LINE OF SEC. 21 TWP. 17-S RGE. 29-E NMPM			
19. Proposed Depth		19A. Formation	20. Rotary or C.T.
2900		San Andres	Rotary
21. Elevations (Show whether DF, RT, etc.)	21A. Kind & Status Plug. Bond	21B. Drilling Contractor	22. Approx. Date Work will start
3550 GL	In effect	Leatherwood Drlg. Co.	Upon approval

23.

PROPOSED CASING AND CEMENT PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
11	8 5/8	28#	360	suff. to circulate	
6 3/4	4 1/2	10.5#	2900	suff. to cover	zones of interest

See attached Prognosis

APPROVAL VALID
FOR 90 DAYS UNLESS
DRILLING COMMENCED,
EXPIRES 7-2-66

RECEIVED

MAY 2 1966

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

Signed J.F. Carnas A.W. Lang Title Dist. Prod. Supt. FOREMAN Date April 28, 1966

(This space for State Use)

APPROVED BY M.L. Armstrong TITLE OIL AND GAS INSPECTOR DATE MAY 5 1966

CONDITIONS OF APPROVAL, IF ANY:

MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102
Supersedes C-128
Effective 1-1-65

All distances must be from the outer boundaries of the Section.

Operator TENNECO OIL COMPANY			Lease STATE "1"		Well No. 21
Unit Letter J	Section 21	Township 17 SOUTH	Range 29 EAST	County EDDY	
Actual Footage Location of Well: 1980 feet from the SOUTH line and 1980 feet from the EAST line					
Ground Level Elev.	Producing Formation SAN ANDRES-GOLTTIC ZONE		Pool GRAYBURG JACKSON		Dedicated Acreage: 40(NW$\frac{1}{4}$SE$\frac{1}{4}$) Acres


1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

RECEIVED

MAY 2 1966

☐ Yes ☐ No If answer is "yes," type of consolidation _____
If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____
ARTESIA, CALIF.

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

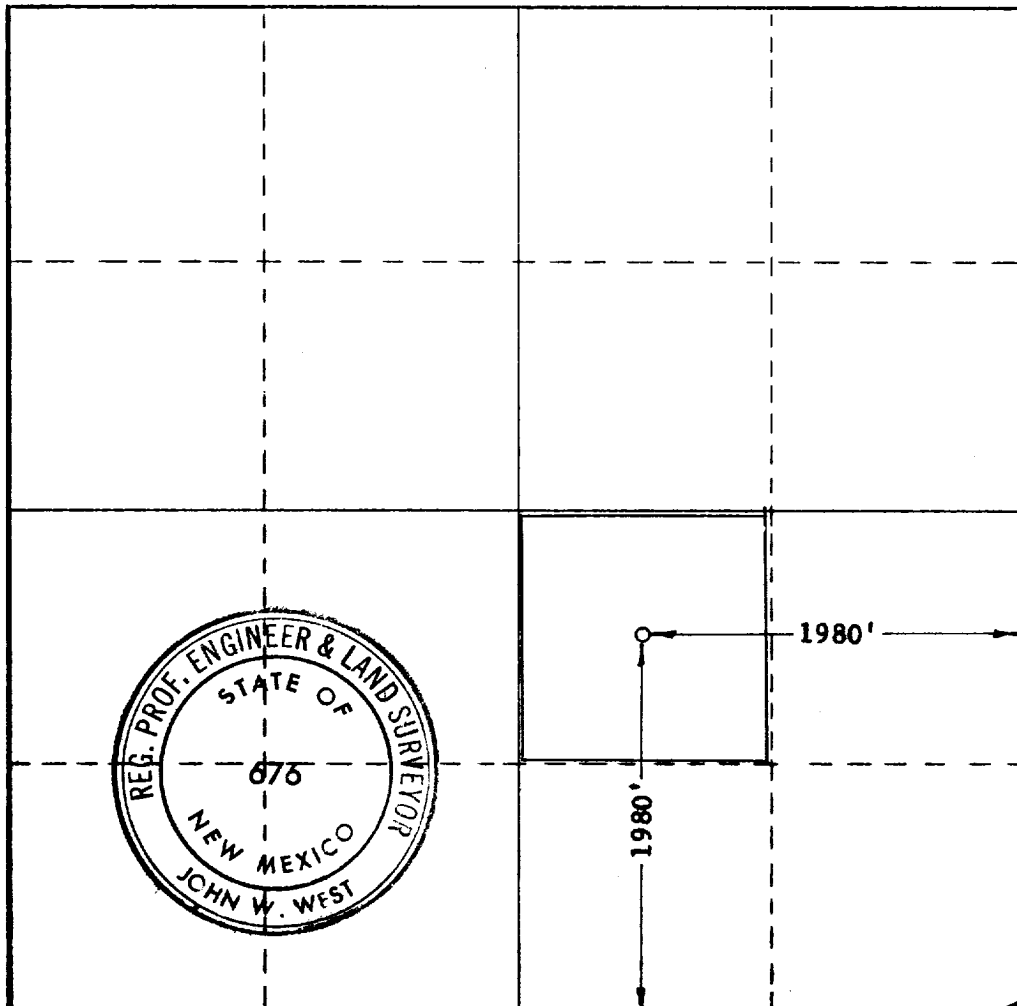

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Name
John W. West
Position

AGENT

Company
TENNECO OIL CO.

Date
4/25/66

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed
4/23/66

Registered Professional Engineer and/or Land Surveyor

John W. West
Certificate No.

676

OFFICE OF THE

GENERAL COUNCIL

GENERAL COUNCIL

GENERAL COUNCIL

State "I"

No. 21

Grayburg-Jackson

New Mexico

1980' FEL & 1980' FSL, Section 21,
T-17-S, R-29-E, Eddy County, New Mexico

2900'

Oil, Pumping

3550 GL

RECEIVED

MAY 2 1966

O. C. C.
ARTECIA, TEXAS

1. Drill 11" hole to 360' with OSC or equivalent.
2. Run and cement 8-5/8", 24#/ft., H-40, ST&C casing to T.D. Cement with class A saturated salt cement. If surface hole is dry drilled because of lost circulation, run a cement basket above the lost circulation zone and fill from the top. Run bar centralizers on guide shoe and bottom two joints. Use guide shoe and insert float.
3. If float holds, release pressure immediately. Center 8-5/8" casing, nipple up and install rotating head and BOP. After 12 hrs. from plug down, go in hole with drill pipe and bit, test casing to 800 psi for 30 min. Drill float collar and cement with water to guide shoe. Blow hole dry with air and drill with air and/or mist to T.D.
4. Drill 6-3/4" hole to T.D. Use W7R-2 or equivalent for first two bits, then run RG7AJ's or equivalents to T.D. Run insert-type reamer at 30' above bit to T.D. Complete drilling program to be furnished to rig.
5. Hole may become wet below 1700'/. Be prepared to mist at this depth.
6. Run 4-1/2", 10.5# casing to T.D. Use guide shoe and float collar. Use centralizers through productive zone.
7. Cement with sufficient class C with 16% gel and 3% salt to reach 2000' (no excess) and tail in with latex-class C to reach 100' above top productive zone (consult Geologist).
8. If float holds, release pressure, set slips & release rig. Run temperature survey after 8 hrs.

4-1/2

8-5/8

4-1/2

0-360

360

28

H-40

ST&C

4-1/2

10. 3rd.

10. 3rd.

10. 3rd.

10. 3rd.

10. 3rd.

0-2900

2900

10.5

J-55

8rd.

RECEIVED

MAY 2

ANTHONY, N.Y.

0-360

Spud mud of bentonite, lime for viscosity as needed. If circulation is lost dry drill to casing point.

360-T.D.

Air and/or mist as needed.

- Notes: 1) In the event that hole conditions necessitate going to fluid - brine will be used.
 2) Several air or CO₂ blows may occur in the salt section and to a depth of 1400'.
 3) Water may occur at 1700'± and misting may be necessary below this depth.
 4) Gas may be encountered in Metex sand at 2280'±.

Blowout Preventers

1. Use Borden 900 Blowout preventers as per Company specifications.
2. When rigging up, test blowout preventer and manifold to full working pressure with cold water, or as specified by Company representative.
3. Operate blowout preventers at least once each day, or as Company representative requires.
4. An extra set of drill pipe rams will be required on location at all times while drilling or completing.
5. All choke manifolds, lines and valves will be located at the side of and away from substructure.

Drill Pipe Measurements

1. Drill pipe will be tallied at all coring, testing, logging and casing points.

RECEIVED

1972 1355

1. The hole shall be kept vertical on every trip or every 500', whichever is the greater. The hole shall be kept vertical with accuracy within four degrees.
2. The hole shall not deviate more than $1\frac{1}{2}^\circ$ in any 100'. If deviation exceeds $1\frac{1}{2}^\circ$ per 100', the hole shall be plugged back and straightened.
3. Maximum deviation shall be allowed as follows:

0 - 500	1°	4000 - 6000	1°
500 - 1000	1°	6000 - 8000	2°
1000 - 2000	2°	8000 - 10000	3°
2000 - 4000	3°	10000 - 12000	4°

RECORDING

1. A recorder with torque, hook load, and rate of penetration will be used.
2. Record 1' drilling time on recorder from 0 to T.D.
3. Record 10' drilling time from 1800 to T.D. on Company form. This shall be as soon as recorded with daily logging reports.

LOGGING

1. Sonic or density T.D. to surface.

LOGGING

As directed by geologist

LOGGING

None

LOGGING

None

RECEIVED

Salt Top	288	Premier Sand	2420
Salt Base	638	San Andres	2443
Yates	688	Oolitic	2618
Queen	1758		
Metex	2280		

Drilling to Drill

1. The A.M.D. Daily Drilling Report will be filled out completely and neatly each 8 hour tour. One clear and legible copy will be mailed daily to Tenneco Oil Company. Mail Company Drilling sheets as soon as each sheet is finished with Daily Drilling Report.
2. A daily report sheet and a cost sheet will be furnished by the operator for the well. The contractor's tool puncher will keep these forms current and complete. The daily cost, total cumulative cost and cumulative mud cost will be given daily along with the Tenneco morning report. At the conclusion of the well, the cost forms will be mailed to Tenneco Oil Company, P. O. Box 1031, Midland, Texas.
3. The morning report shall be called to Tenneco's Midland office as soon after 8:00 A.M. each weekday morning as practical. Phone number is MF 3-4621, area code 915.
4. For notifications at other than office hours, call:

TELEPHONE:

TELETYPE:

James Eaton OX 4-7668

A. R. Gibson MU 4-7545

B. E. Desadier MU 4-5390

A. W. Lang MU 2-3010

RELEASED BY:

ATTACHED BY:

A. R. Gibson

A. R. Gibson

B. E. Desadier

A. W. Lang

J. F. Carnes
J. F. CARNES