RECEIVED BY

SUBMIT IN TRIPLICATE.

Form approved. Budget Bureau No. 42-R1425

UNOTED STATES AUG 10 1984 reverse side)

30-	015-	249	56

DEPARTMENT OF THE INT	ERIOR _		5. LEASE DESIGNATION	
GEOLOGICAL SUBVEY	O. C. D.		LC-028731 (A))
APPLICATION FOR PERMIT TO DRILL, DE	EPEN, OR PLUG'E	ACK_	6. IF INDIAN, ALLOTTEE	OR TRIBE NAME
DRILL X DEEPEN	PLUG BA	ak 🗆	7. UNIT AGREEMENT N.	AME
OIL X GAS OTHER	SINGLE ZONB ZONB	"	8. PARM OR LEASE NAM	18
Marbob Energy Corporation	1 40,500		M. Dodd "A" 9. WELL NO.	
3. ADDRESS OF OPERATOR	1. 16		3/	
P.O. Drawer 217, Artesia, N.M. 88210	15 40 100 100 100 100 100 100 100 100 100		10. PIBLO AND POOL, O	
4. LOCATION OF WELL (Report location clearly and in accordance with a At surface	ng State requirements.*)	~	Grayburg Jack	- /// 1
1350 FNL 330 FEL		111	11. and, T., 2., M., OE'S AND SURVEY OR AR	BA
At proposed pred. some Same	A Company of	(Aur.) 21	Sec. 22-T175	5-R29E
14. DISTANCE IN MILES AND DESCRION FROM NEAREST TOWN OR POST OF	PFICE*		12. COUNTY OR PARISH	18. STATE
20 411 112100 0400 01 112002147 31111	8210		Eddy	N.M.
15. DISTANCE FROM PROPOSED® 16	. NO. OF ACRES IN LEASE	17. MO. 0	OF ACRES ASSISTED	

17. NO. OF ACRES ASSISTED TO THIS WALL

10. DISTANCE FROM PROPOSED⁰
LOCATION TO MEAREST
PROPERTY OS LEASE LINE, FT.
(Also to nearest drig, unit line, if any)

600 19. PROPOSED DEPTH

20. ROTARY OR CARLE TOOLS

40

18. DISTANCE FROM PROPOSED LOCATION[®]
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT. 21. ELEVATIONS (Show whether DF, RT, GR, etc.)

300'

3450' Rotary

> 22. APPROE. DATE WORK WILL START* 8/1/84

3585.6' GR $\overline{23}$.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CRMENT
12 1/4"	8 5/8"	24#	350 '	Sufficient to circulate
7 7/8"	5 1/2"	15.50#	3450 '	450 sax, to base of salt

Pay zone will be selectively perforated & stimulated as needed for optimum production.

- 1. Location & acreage dedication plat
- 2. Supplemental drilling data
- Surface use plan

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive some and proposed new productive sone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

rris

Production Clerk

7/13/84 DATE

(This space for Federal or State office use)

GENERAL REQUIREMENTS AND

SPECIAL STIPULATIONS

MINCHED

Subject to

24

See Instructions On Reverse Side

+ MEXICO OIL CONSERVATION COMMIS. 4 WELL LOCATION AND ACREAGE DEDICATION PLAT

All distances must be from the outer boundaries of the Section

perator			. 0080	DODD "A"			Wei. 'vc.
	RBOB ENERGY (CORP.	Roznge		County		31
n,t Detter	Section	17S	,	29E		DDY	
A tual Pootage Loc	ration of Well:	NORTH	330			EAST	
Or und Level Flev.	feet from the Producing F	line	Poc!		from the	1	ine edicated Acreage:
3585.6	San	Andres		urg Jackso			40 Arres
1. Outline th	ie acreage dedi-	cated to the subjec	t well by col	ored pencil or	hachure m	arks on the	plat below.
	han one lease i nd royalty).	is dedicated to the	well, outline	each and iden	itify the ow	vnership the	reof (both as to working
3. If more th	an one lease of communitization.	different ownership unitization, force-p	is dedicated pooling.etc?	to the well, h	ave the in	terests of a	ll owners been consoli-
[Yes		answer is "ves," ty		lation			
					tually heen	consolidate	d (l'aprevera eide of
this form	if necessary.)				 		ed. (Use reverse side of
No allowa	ble will be assi	gned to the well unt	il all interests	have been c	onsolidated	d (by commi	unitization, unitization,
forced-poo sion.	oling, or otherwis	se) or until a non-sta	ndard unit, el	iminating such	i interests.	, пыв рееп а	pproved by the Commis-
							CERTIFICATION
			!				
		i i	I				rify that the information con- in is true and complete to the
	1	!			-1350		knowledge and belief.
	1	:			k	ar	el Visio
	 				5-330-	Name) Carolyn	Orris
	1					Fosition	OTTIS
	1						ion Clerk
	1					Company Marbob	Energy Corp.
	1		ار د ۱۰ می			Date 7/6/84	
	i I					//0/04	
							ar at a second to the
	1 i			1 I			ertify that the well location is plat was plotted from field
				· 			tual surveys made by me or
				i sa sa		•	upervision, and that the same d correct to the best of my
	i	} 1		1 		knowledge (and belief:
	- - + - -			†·			
	!					Date Surveyes	i 3/84
	 			} }		Registered Pr	ofessional Engineer
	1			1		and/or Land S	Surveyor
	1			1		XII,	n/Wall
						Contificate No	JOHN W WEST, 676 RONALD J. EIDSON, 3239

REGAN OFFSHORE INTERNATIONAL, INC.

Torrance,

HNNHURE

REGAN BLOWOUT PREVENTERS

The Regan Torus Blowout Preventer is used primarily on production and workover rigs for well control up to 3000 PSI working Dre--ure

•

DESIGN FEATURES

- a. The Torus Preventor is designed for miniduction and workover ries, num beight to facilitate its use with pro-
- working pressure The packer will sent of squeet mole at full affected by minor damage to the inner large, The rubber tacker will conform to have object in the well hore. Scaling ability is not
- The dual packer design increases the relaendinary service, the easer packet is much for is never exposed to the well hare. Pader ability of the presenter store the order rule



TORUS BLOWOUT PREVENTER PATENTED

SPECIFICATIONS

-	Noming!
	Prosection (DES)
# <u>\$</u>	Outside Diameter
٠	Thru Bore
	Overall Height
S 35	We ght
of all and all all all and all all all all all all all all all al	
# ###	
22 - 78 22 0 - 78 2 7 - 78 3	Side
Target and the first terms of the first and the first terms of the fir	To destinate the property of the second section of the section of the second section of the second section of the second section of the section o

SUP Exhibit F

Marbob Energy Corporation SEINEI Well #31 M. Dodd "A" Federa REGAN BLOWOUT PREVENTER Sec. 22-17S-29E.

SUPPLEMENTAL DRILLING DATA

MARBOB ENERGY CORPORATION
WELL #31 M. DODD "A" FEDERAL
SE1/4NE1/4 SEC. 22-17S-29E
EDDY COUNTY, NEW MEXICO
(DEVELOPMENT WELL)

- 1. SURFACE FORMATION: Quaternary.
- 2. ESTIMATED TOPS OF GEOLOGIC MARKERS:

Salt	360 '	Queen	1815'
Base Salt	780'	Grayburg	2140'
Yates	930'	San Andres	25101
Seven Rivers	1145'	Glorietta	3900'


3. ANTICIPATED POROSITY ZONES:


Water Above 180' Oil 2350 - 3450'

4. CASING DESIGN:

SIZE	INTERVAL	WEIGHT	GRADE	JOINT	CONDITION
	0-350'	24.0#	K-55	STC	New
	0-3450'	15.5#	K-55	STĆ	New

- 5. SURFACE CONTROL EQUIPMENT: A double ram-type or annular BOP will be used. (See diagram attached as Exhibit "F")
- 6. CIRCULATING MEDIUM:
 - 0 350' Fresh water mud with gel or lime as needed for viscosity control.
 - 350'- 3450' Salt water mud, conditioned as necessary for control of viscosity and water loss or gain.
- 7. AUXILIARY EQUIPMENT: Drill string safety valve.
- 8. LOGGING PROGRAM: CNL-FDC W/GR Log will be run to TD.
- 9. ABNORMAL PRESSURES, TEMPERATURES OR GASES: A water flow may be encountered in the salt section.
- 10. ANTICIPATED STARTING DATE: It is planned that operations will commence about August 1, 1984. Duration of drilling, testing and completion operations should be one to four weeks.

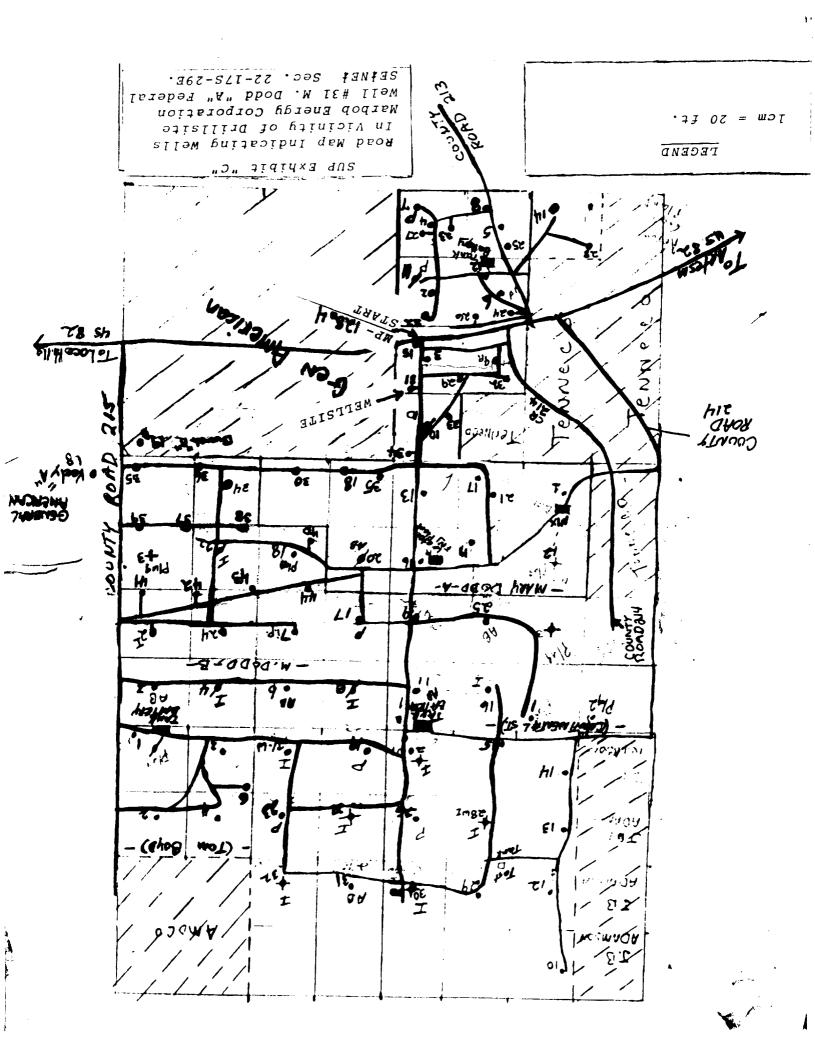

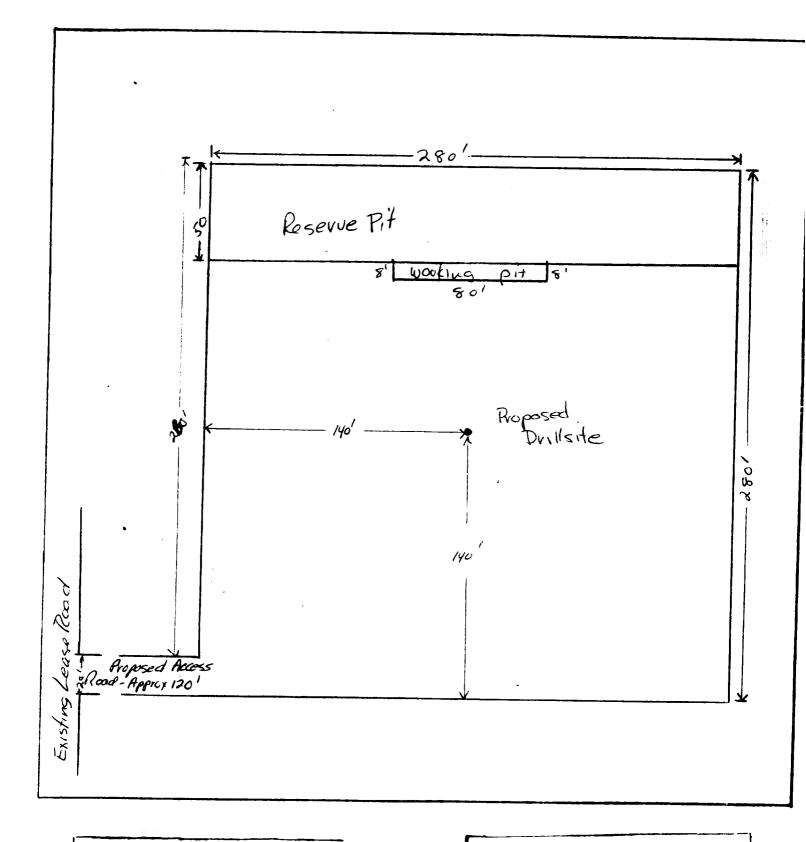

LEGEND

1cm = 20 ft.

SUP Exhibit "D"

SKETCH OF PROPOSED WELL PAD

Marbob Energy Corporation

Well #31 M. Dodd "A" Federal

SEINEI Sec. 22-175-29E