


CHARLES H. CARLETON
TITLE SR ENGINEERING TECHNICIAN DATE March 16, 1968



37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	MEAS. DEPTH	TOP TRUE VERT. DEPTH
				Rustler	293'	
				Salado	453'	
				Tansill	1446'	
				Yates	1491'	
				Seven Rivers	1809'	
				Artesia (Queen)	2420'	
				Grayburg	2758'	
				San Andres	3130'	
		DEPTH	ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.. (continued from the front)			

L & M DRILLING, INC.

OIL WELL DRILLING CONTRACTORS
PO BOX 1370 ARTESIA, NEW MEXICO 88211-1370
(505) 746-4405 746-3518 748-2205

February 18, 1999

Devon Energy Corporation
20 North Broadway, Suite 1500
Oklahoma City, OK 73102-8260

RE: Turner B #138
560' FNL & 660' FEL
Sec. 20, T17S, R31E
Eddy County, New Mexico

Gentlemen:

The following is a Deviation Survey for the above captioned well.

DEPTH	DEVIATION
219'	1°
433'	1 1/2°
933'	1 3/4°
1423'	1 3/4°
1917'	1°
2400'	1 1/4°
2912'	1 1/4°
3578'	1 1/4°
3706'	2°


Very truly yours,




Eddie C. LaRue
Vice President

STATE OF NEW MEXICO }
COUNTY OF EDDY }

The foregoing was acknowledged before me
this 18th day of February, 1999.

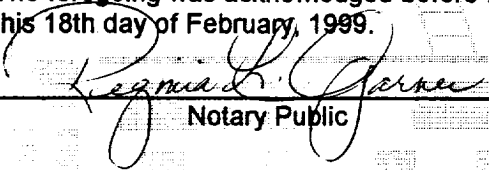

Notary Public

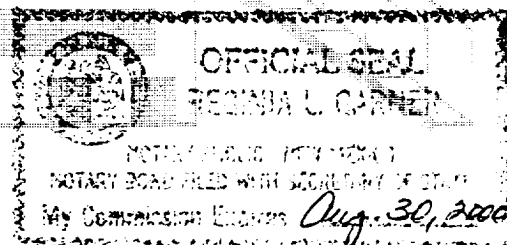

DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: TURNER "B" #138			FIELD: GRAYBURG-JACKSON		
LOCATION: 560' FNL & 660' FEL, SEC 20-T17S-R31E			COUNTY: EDDY	STATE: NM	
ELEVATION: GL=3720', KB=3732'			SPUD DATE: 02/08/99	COMP DATE: 03/04/99	
API#: 30-015-30321		PREPARED BY: C.H. CARLETON			DATE: 03/05/99

	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 430'	8 5/8"	24#	J-55	ST&C	12 1/4"
CASING:	0' - 3705'	5 1/2"	15.5#	J-55	LT&C	7 7/8"
CASING:						
TUBING:	0' - 2797'	2 3/8"	4.7#	J-55	EUE 8rd	
TUBING:						

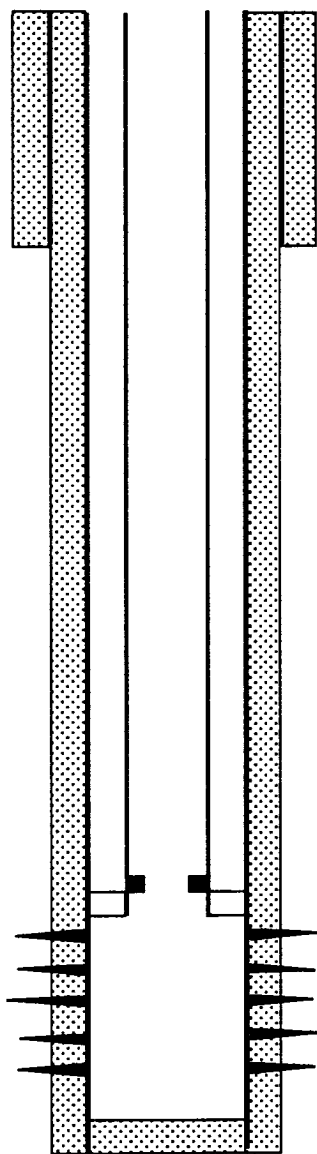

☒ CURRENT

☐ PROPOSED

OPERATOR: DEVON ENERGY CORPORATION (NEVADA)

8 5/8" CASING @ 430' W/475 SXS. TOC @ SURFACE.

DETAIL OF PERFORATIONS

U.GRAYBURG: 2836', 38', 54', 56', 61', 63', 65'

M.GRAYBURG: 2887', 89'

LOCO HILLS: 2915', 24', 31'

METEX: 2957', 61', 75', 80', 85', 87'

L.GRAYBURG: 3022', 24', 40', 43', 47', 50'

PREMIER: 3095', 97', 3105', 22', 24', 27', 29'

VACUUM: 3195', 97'

LOVINGTON: 3277', 79', 83', 93'

SEAT NIPPLE @ 2797'

BAKER AD-I PACKER @ 2798'

PERFORATIONS: 2836'- 3293' (OA) - 37 HOLES

PBTD @ 3660'

5 1/2" CASING @ 3705' W/1170 SXS. TOC @ SURFACE.

TD @ 3706'