


N.

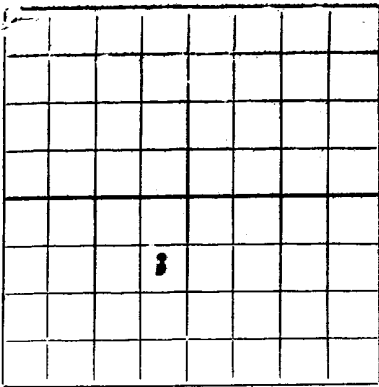

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

6

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Robert L. Bunnel
(Company or Operator)

Magnolia-State
(Lease)

Well No. 1, in NE $\frac{1}{4}$ of SW $\frac{1}{4}$, of Sec. 14 15, T. 21S, R. 27E, NMPM.

Wildcat (Underlying) Pool, Eddy County.

Well is 1650' feet from South line and 2310 feet from West line of Section 14 15. If State Land the Oil and Gas Lease No. is E 1290.

Drilling Commenced 7-10-55, 19..... Drilling was Completed 8-16-55, 19.....

Name of Drilling Contractor W-W Drilling Company

Address Box 529, Carlsbad, New Mexico

Elevation above sea level at Top of Tubing Head 3316'. The information given is to be kept confidential until....., 19.....

OIL SANDS OR ZONES

No. 1, from.....to..... No. 4, from.....to.....
No. 2, from.....to..... No. 5, from.....to.....
No. 3, from.....to..... No. 6, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 623' to 626' feet. Two bailers of water in 15 minutes.
No. 2, from.....to.....feet.
No. 3, from.....to.....feet.
No. 4, from.....to.....feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

.....
.....
.....
.....

Result of Production Stimulation.....

.....Depth Cleaned Out.....

CORD OF DRILL-STEM AND SPECIAL TE

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from.....feet to.....feet, and from.....feet to.....feet.
Cable tools were used from.....0.....feet to.....626.....feet, and from.....feet to.....feet.

PRODUCTION

Put to Producing.....**Dry and Abandoned 8-25-55**.....

OIL WELL: The production during the first 24 hours was.....barrels of liquid of which.....% was
was oil;% was emulsion;% water; and.....% was sediment. A.P.I.
Gravity.....

GAS WELL: The production during the first 24 hours was.....M.C.F. plus.....barrels of
liquid Hydrocarbon. Shut in Pressure.....lbs.

Length of Time Shut in.....

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.....	T. Devonian.....	T. Ojo Alamo.....
T. Salt.....	T. Silurian.....	T. Kirtland-Fruitland.....
B. Salt.....	T. Montoya.....	T. Farmington.....
T. Yates.....	T. Simpson.....	T. Pictured Cliffs.....
T. 7 Rivers.....	T. McKee.....	T. Menefee.....
T. Queen.....	T. Ellenburger.....	T. Point Lookout.....
T. Grayburg.....	T. Gr. Wash.....	T. Mancos.....
T. San Andres.....	T. Granite.....	T. Dakota.....
T. Glorieta.....	T.	T. Morrison.....
T. Drinkard.....	T.	T. Penn.....
T. Tubbs.....	T.	T.
T. Abo.....	T.	T.
T. Penn.....	T.	T.
T. Miss.....	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
Surface	12	12	Caliche	292	325	33	Dolomite, gray, dense
12	14	2	Blue & Green Clay	325	327	2	Dolomite and blue shale
14	35	21	Red clay & caliche	327	354	27	Dolomite, lt gray dense
35	45	10	Very fine red sand	354	407	53	Dolomite lite dense
45	62	17	Red & blue clay & caliche	407	426	19	Dolomite, lite gray
62	75	13	Gray dolomite	426	434	8	Sand, fine gray
75	85	10	Red clay, some white gypsum	434	435	1	Dolomite, reddish
85	103	18	Very fine sd. & gyp.	435	450	15	Sand fine gray F&G
103	109	6	Red clay & red & white gypsum	450	454	4	Sand, dead oil stain
109	200	91	Red clay & gypsum	454	456	2	Dolomite, white, red, some sand
200	210	10	Gypsum, some pink & gray	456	462	6	Dolomite, lite, dense
210	215	5	Gypsum & dark red- brown clay	462	467	5	Dolomite, red silty
215	235	20	Gypsum	467	491	24	Dolomite, lite, dense
235	255	20	Gypsum & little dense anhydrite	491	510	19	Sand, fine, gray
255	262	7	Gypsum & anhydrite	510	519	9	Sand, fine, gray and gray dolomite
262	270	8	White gypsum	519	524	4	Sand, fine, gray
270-	277	7	" " & anhydrite	524	527	3	Dolomite, lite dense
277	285	8	Dolomite & Anhydrite, gray	527	538	11	Dolomite, lite brown dense
285	292	7	Dolomite, lite tan & anhydrite	538	549	11	Dolomite, lite gray, some oslitic, little oil stain
				549	569	20	Dolomite, lite gray dense
				569	580	11	Sand, very fine, lite

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far
as can be determined from available records.

Company or Operator.....*Robert L. Bannell*.....

Address.....*Box 579 Carlsbad, N.M.*.....

Name.....

Position or Title.....*Owner*.....

FROM	TO	THICKNESS IN FEET	FORMATION
580	586	6	Dolomite, lite gray to white, some porosity
586	605	19	Dolomite, lite gray to white, dense
605	606	1	Shale, lite green bentonitic
606	610	4	Shale, and dolomite, lite dense
610	614	4	Dolomite, brown oil stained, some green shale
614	619	5	Dolomite lite dense, some green shale
619	620	1	Dolomite, brown stained, sandy, some gr shale
620	622	2	Shale, lite green bentonitic
622	626	4	Dolomite, lite, some brown stained & poros
TD 626			2 bailers water in 15 min.

FROM	TO	THICKNESS IN FEET	FORMATION
280	280	6	Dolomite, life gray to white, some porosity
280	282	10	Dolomite, life gray to white, dense
282	286	1	Shale, life green bentonitic
286	290	4	Shale, and dolomite, life dense
290	294	4	Dolomite, brown oil stained, some green shale
294	298	2	Dolomite life dense, some green shale
298	300	1	Dolomite, brown stained, sandy, some green shale
300	302	1	Shale, life green bentonitic
302	304	4	Dolomite, life, some brown stained & porous
TD 304			2 barrels water in 12 min.

6
1
1
2
1
1
Bureau of Mines ✓