


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

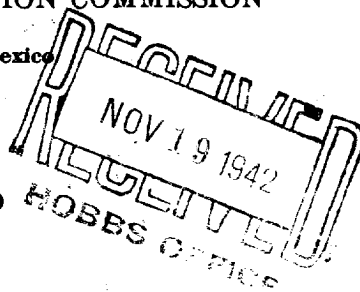

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Mac T. Anderson

Box 95, Artesia, New Mexico

Company or Operator

Address

Stevens

Well No.

1

in SE 1/4 NW 1/4

of Sec. 31

T. 20

Lease

R. 28

N. M. P. M.

Wildcat

Field,

Eddy

County.

Well is 1980 feet south of the North line and 3300 feet west of the East line of Sec. 31

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced Aug. 22 1942 Drilling was completed Oct. 28 1942

Name of drilling contractor Gracey and Doyle Address Artesia, New Mexico

Elevation above sea level at top of casing 3244 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 393 to 395 No. 4, from to

No. 2, from 586 to 601 No. 5, from to

No. 3, from 624 to 636 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 344 to 350 feet.

No. 2, from 402 to 440 feet.

No. 3, from 727 to 754 feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"	40	10	LapW	168'	reg	168'			cave
8 1/2"	32	10	"	387'	"				water
7" OD	20	10	"	720'	"				"

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10 1/2"	10"	168'		Bucketed	heavy	Ton to the string.
10"	8 1/2"	387'		"	"	"
8 1/2"	7" OD	720'		"	"	"

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 754 feet, and from feet to feet

PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

H.C. Gracey Driller

Lee Doyle Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 13th

day of November 1942

Janne Horner nee Janne White
Notary Public

My Commission expires Sept. 11, 1943

Artesia, N.Mex. Oct. 29, 1942

Name Ethel Wacker

Position Bookkeeper

Representing Mac T. Anderson

Address Box 95, Artesia, N.Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	1	1	Sail
1	11	10	Red clay
11	168	157	Heaving sandy silt
168	175	7	Grey shale
175	180	5	Red clay
180	208	28	Broken lime
208	210	2	Red bed
210	240	30	Broken lime
240	315	75	Anhy., gyp and red rock
315	344	29	Anhy
344	369	25	Lime, WATER, 4 blrs.per hr., 350'
369	384	15	Green bentonite
384	390	6	Lime
390	393	3	Grey shale
393	398	5	Sandy lime, OIL saturation.
398	402	4	White lime
402	440	38	Lime, WATER
440	462	22	Grey lime
462	473	11	Shaley lime, (Yates)
473	545	72	Lime, grey, small breaks, gyp & shale
545	564	19	Grey lime anhy gyp shale, anhy shells
564	586	22	grey lime, anhy & gyp
586	601	15	Broken lime & blue shale. OIL Saturation.
601	624	23	Hard grey lime
624	636	12	Brown lime, OIL saturation.
636	720	84	Grey lime
720	727	7	Grey lime, OIL saturation
727	754	27	Dark lime, hole full sulphur WATER
	TD		