


EXHIBIT B


..... OPTIONAL EQUIPMENT

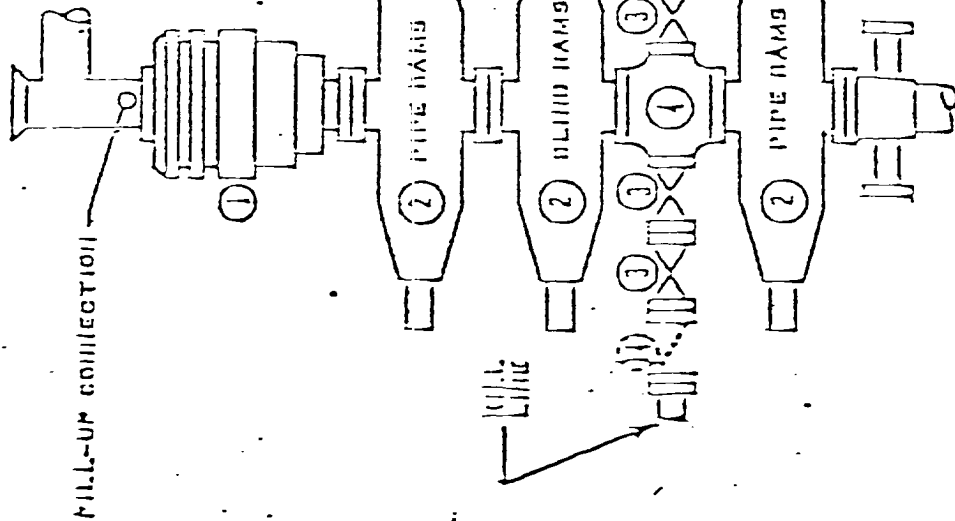

- 1 2" SEW, 1500 PSI WORKING PRESSURE
- 2 2" SEW, 1500 PSI WORKING PRESSURE
- 3 3" SEW, 1500 VALVE
- 4 2" SEW, 1500 VALVE
- 5 3" SEW, 1500 X 2" SEW, 1500 STEEL TEE
- 6 2" SEW, 1500 VALVE
- 7 2" AND PRESSURE GAUGE
- 8 3" SEW, 1500 X 2" SEW, 1500 STEEL CROSS
- 9 2" SEW, 1500 ADJ. CHOKER
- 10 2" SEW, 1500 ADJ. CHOKER OIL-2" SEW, 1500 INCH VALVE ON SIDE OUTLET OF 2" SEW, 1500 STEEL TEE
- 11 ADAPTER, 2" SEW, 1500 X 10,000 LB FLANGE MATING (12) INLET
- 12 10,000 LB WP REMOTE CHOKER
- 13 HYDRAULIC CHOKER, 2500 LB WP OR BETTER
- 14 3" SEW, 1500 CHECK VALVE

NOTES

1. 5000 PSI WP OR BETTER CLAMP LIPS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOKER MAY BE REPLACED WITH A POSITIVE CHOKER
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE HOPE MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

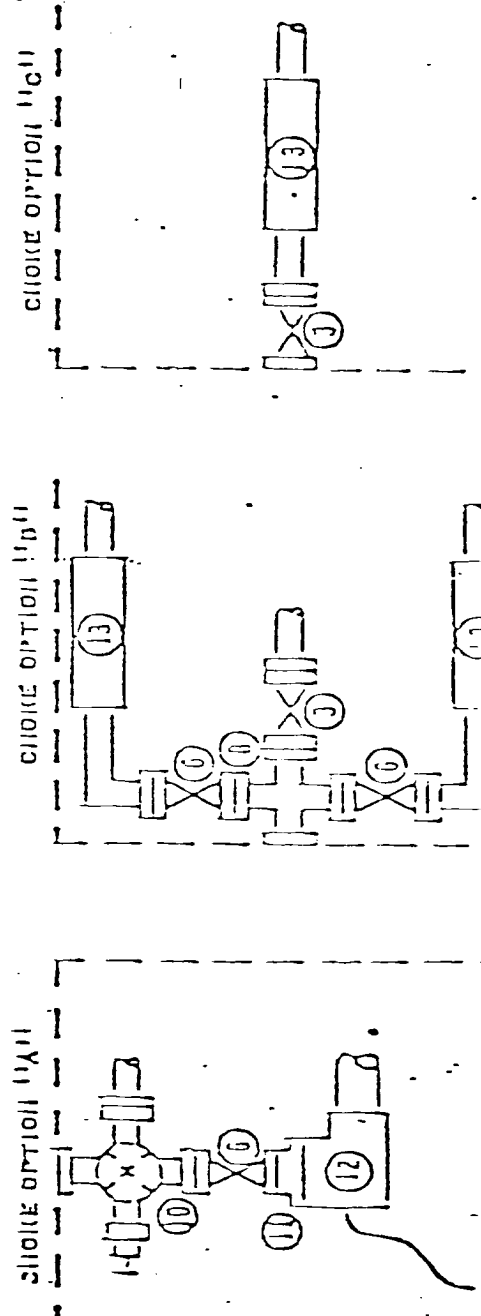

5000 PSI WORKING PRESSURE
BLOWOUT PREVENTER HOOK-UP
(SERIES 1500 FLANGES OR BETTER)