

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM OIL CONS COMMISSION
Drawer DD
Artesia, NM 88210

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

Address and Telephone No.

105 South 4th St., Artesia, NM 88210

Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FNL & 510' FEL (Unit H) Section 10-T24S-R24E

5. Lease Designation and Serial No.

NM 491

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Redbone BP Federal #2

9. API Well No.

30-015-27747

10. Field and Pool, or Exploratory Area

Undes. Crooked Creek Morrow

11. County or Parish, State

Eddy County, NM

JAN 26 1994

CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Spud well, set surface
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☒ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 26" hole with Auger Air 12:30 PM 1-9-94. Set 40' of 20" conductor. Resumed drilling 17-1/2" hole 11:15 AM 1-12-94. Ran 8 joints 13-3/8" 54.5# J-55 casing set 300'. Guide shoe set 300', insert float set 264'. Cemented with 400 sx Class "C" Neat with 2% CaCl2 (yield 1.33, wt 14.8). PD 8:10 AM 1-13-94. Bumped plug to 600 psi, held OK. Circulated 84 sacks cement to pit. WOC. Drilled out 2:10 AM 1-14-94. WOC 18 hours. Cut off and weld on flow nipple. Reduced hole to 12-1/4" and resumed drilling.

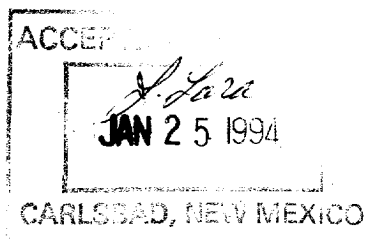

I hereby certify that the foregoing is true and correct

Signed [Signature]

Title Production Supervisor

Date 1-18-94

(This space for Federal or State office use)

Approved by
Conditions of approval, if any:

Title

Date

18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side