
SONAT EXPLORATION

West TEXAS BUSINESS UNIT

Minimum Requirements for a 3,000 psi BOP Stack Manifold

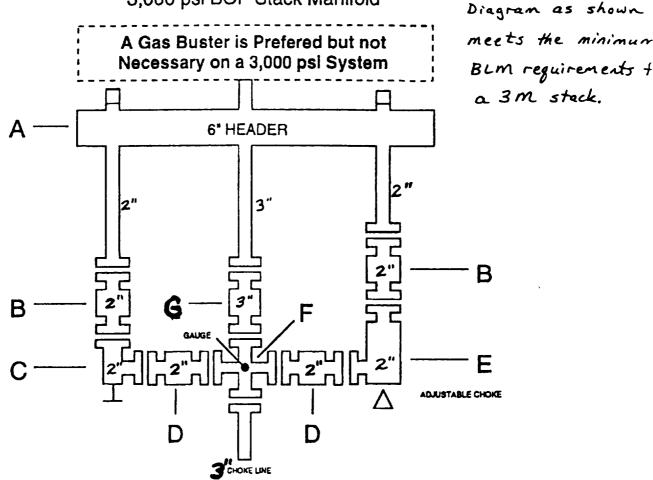

A. Header for Gas Expansion 6" O.D. Tube.

B. 2" 3 M Manual Valves on Down Stream Side of Choke.

C. 2" 3 M Manual Adjustable or Positive Choke.

D. 2" 3 M Manual Valve

E. 2" 3 M Adjustable w/ Remote Station

F. 3 3 M Tee w/ Guage in Top Side 3" Choke Line

Note: All Pipe Will be Flanged & Welded. No Screwed Connections.

Page 2 of 2

G. 3" 3m Manual Valve