

Submit 3 Copies To Appropriate District Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
March 4, 2004

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL APINO 30-045-09347
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Blancett
8. Well Number 1
9. OGRID Number 013998
10. Pool name or Wildcat Aztec PC

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:  
Oil Well ☐ Gas Well ☒ Other

2. Name of Operator  
Maralex Resources, Inc.

3. Address of Operator  
P.O. Box 338, Ignacio Colorado 81137

4. Well Location  
Unit Letter G 2230 feet from the North line and 2000 feet from the East line  
Section 24 Township 30N Range 12W NMPM County San Juan

11. Elevation (Show whether DR. RKB. RT. GR. etc.)  
5554' Derrick Floor

Pit or Below-grade Tank Application (For pit or below-grade tank closures, a form C-144 must be attached)

Pit Location: UL G Sect 24 Twp 30N Rng 12W Pit type Prod. Depth to Groundwater 30' Distance from nearest fresh water well 200'?  
Distance from nearest surface water 500' Below-grade Tank Location UL  Sect  Twp  Rng   
feet from the  line and  feet from the  line

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data.

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/> PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPLETION <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>
OTHER: <input type="checkbox"/>	OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Notice of Intent to plug and abandon the Blancett #1. See the attached wellbore schematic for the plugging details.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOC guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Dennis R. Reimers TITLE Engineering Manager DATE July 1, 2004

Type or print name Dennis R. Reimers E-mail address:  Telephone No. (970) 563-4000

(This space for State use)

APPROVED BY Charles TITLE  DATE   
Conditions of approval, if any:

DEPUTY OIL & GAS INSPECTOR, DIST. #

JUL - 2 2004

## Blancett No. 1

2230' FNL; 2000' FEL

S24-T30N-R12W

San Juan County, New Mexico

8 5/8" 23 #  
Set @ 100'  
Circ. Cement to  
Surface.

### Formation Tops:


Kirtland / Fruitland : 500'

Pictured Cliffs: 1809'

### Proposed Plugging and Abandonment Procedure:

Note: Both the surface and production casing had cement circulated to the surface.

1. Tag bottom w/ tubing. Stack cement to 1550'. In 4 1/2" casing this will require 59 ft<sup>3</sup> (52 sacks of cement).
2. Pressure test cement plug to 500 psi. If pressure test holds proceed with setting a cement plug from 350' - 900'. This will require 50 ft<sup>3</sup> (43 sacks of cement). If the bottom plug does not pressure test a remedial cementing will occur.
3. Stack cement from 100' to surface (9.2 ft<sup>3</sup> - 8 sacks).
4. Install dry hole marker with required well location and information.
5. Reclaim the surface location to NMOCD and land owner specifications.

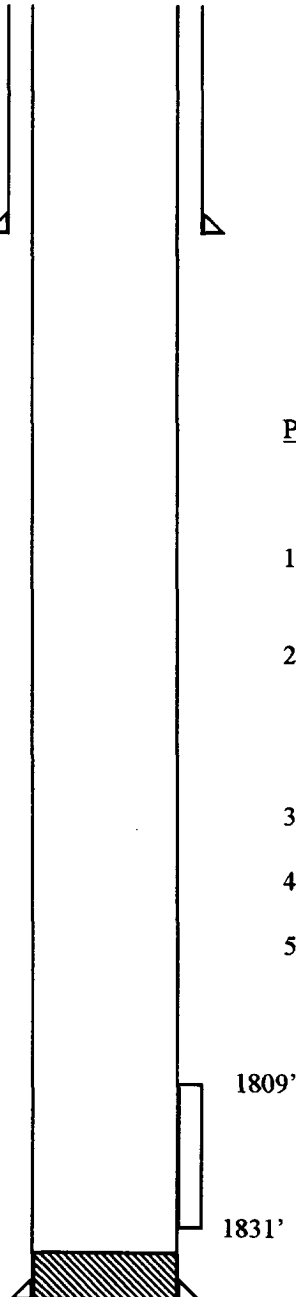

4 1/2" 9.5 #  
Set @ 2199'  
Cement w/ 410 sxs.  
Circ. Cmt to Surface.