UNITED STATES

FORM APPROVED

OMB	No.	1004-013

	Form 3160-3	DEPARTME	NT OF THE INTE	RIOR			OMB No. 1004-0	136	
	(August 1999)	BURFALLOF	LAND MANAGEI	MENT		Expires November 30, 2000			
	(Antitres (1989)	DONE IO O	L ((1) (1) (1) (1) (0)		İ	5. Lease	Designation and Seria		
		ON IOATION COD D	COMPT TO DOUG	OD DEENTE	:D		080385		
	Al	PPLICATION FOR P	ERMIT TO DRILL						
				2004 .11) 6.,HUhdia	n, Allottee or Tribe Na	ne	
				2					
	1a. Type of Work	DRILL	REENTER		RECEIVED	7. If Unit	or CA, Ag reemen t, Na	me and No.	
						, ,,,RINC	CON UNIT NMNM	78406D	
	1b. Type of Well:	Oil Well Gas We	il Other Si	ingle Zone 0 7 (N	fultiple Zone NGTO	8: Lease	Name and Well No.		
						RIN	CON UNIT #4	12	
/	2. Name of Operat	of .				9. API W			
/	•		•	NA 00010 # 400	074	2	0039 27	2803	
	Pure Resour	ces, LP	N	IM OGRID # 189	0/1				
					10-0		and Pool, or Explorate		
	3a. Address C	o Mike Pippin, LLC		b. Phone Number 🖔	40075	Blai	nco MV & Basii	n DK	
	3104 N. Sulli	van Ave., Farmington	n, NM 87401 (505) <i>3</i> 27-457	3 ීබා	11. Sec.,	T., R., M., or Bik. and	Survey or Area	
		(Footage, Sec, T. R., M, or Su		(A)	1/0 51 3	\			
				" BOA		sec (i	26, T-27-N, R	_07_ \ \/	
	At surface:	Unit Letter G, 19	00 FEL, 2000 FI	IL ROOM	$\sim 20^{\circ}$	3/2	20, 1-21-N, N	-07-44	
	At proposed prod.	Zone:		ကြာ ်	00	36		, 	
	14. Distance in mil	es and direction from nearest to	own or post office*	F. G	₹% (v) 9	12. Cour	ty or Parish,	13. State	
1	35 Miles South	east of Rianco		E.S.) Rio	Arriba /	New Mexico	
- [1 2 6	- in lease	· · · · · · · · · · · · · · · · · · ·		·	
+	- 15. Distance from			16 No of Acre	is in lease	17. Spac	ing Unit dedicated to t $= N/2 334$	1 S W S	
J	location to nearest	1965'		1 500	2000 Cl Al 1200				
	propety or lease lin	e, ft.		264	5.092 60.5	M∨	= E/2 340	,56	
	(Also to nearest dr								
				+		lan 1	I MEDIA Davidala 5		
	18. Distance from	• •		19. Proposed	Deptn	[20. B	LM/BIA Bond No. on f	ile	
	location to nearest	well 1307'		7665'		İ			
	21 Flevation (Shr	whether DF, KDB, RT, GL, e	tc.)	22 Approxima	te date work will start*	23. E	stimated duration		
	6750' Groun			12/18/2			30 days		
	0750 Glouis	u Level	24		.004		JU days	<u> </u>	
	72 6.0			Attachments	adas No. 4. abad ba atta	abad ta this f			
		g, completed in accordance wi	•					to a board on Ala /aaa	
		certified by a registered survey	ror.	4	4. Bond to cover the op	erations unle	ss covered by an exist	ing bond on the (see	
	2. A Drilling				Item 20 above).				
		e Use Plan (if the location is or	-		5. Operator certification				
	SUPO s	hall be filed with the appropriate	a Forest Service Office.	•	5. Such other site speci	fic informatio	n and/or plans as may	be required by the	
					authorized officer				
	Size of Hole	Grade, Size of Casing		ht per Foot	Setting Depth		Quantity of Ceme		
	12-1/4"	9-5/8" H-40		2.3#	350'		158 Sxs, 220 ft3		
	8-3/4"	7" K-55	2	:O#	2900'		327 Sxs, 632 ft3		
	6-1/4"	4-1/2" I-80	1	1.6#	7665'		580 Sxs, 1200 ft	3 - 45% Excess	
	The on-s	ite inspection was on 6/7/	04 by Brice Barlan						
	Archy is I	by DCA							
	EA is by	Permits West	SEE ATT	ACHED APD INF	FORMATION	L	atitude: 36 Deg, 3	32 Min, 44 Sec N	
							gitude: 107 Deg, 3		
	25. Signature				Name(Printed/Typed)		Date		
	· · · · ·	\mathcal{M}		1	, , , , , , , , , , , , , , , , , , , ,			6/16/2004	
	7	hope tuple	n	1	Mike Pippin			0/10/2001	
	Title Age	ht/- Petroleum Engineer			тико г грриг				
	/ / / /	yny i daddayn Einginiddi) 1					,	
	Approved by (\$)gg	atura) /	/-//		Name(Printed/Typed)		Date	/	
] '	vamo(r mileur i ypeu)		Dale	<i>'</i>)	
			ala	1			11/	. 7 / 2 -	
		m zeu	yna_		~~		166/0	70/07	
	Title	= WIM	/('	Office $22/$	()	/	•	
	ACTIN		\		TT (
		al does not warrant or certify th	e applicant holds legal or	equitable title to thos	e nghts in the subject le	ase which w	ould entitle the applica	nt 10	
	conduct operation								
		oval, if any, are attached.							
		ation 1001 and Title 43 U.S.C. S				make to any	department or agenc	y of the	
	United States any	false, ficticious, or fraudulent s	tatements or representation	ons as to any matter	within its jurisdiction.				
	40								

Constructions on reverse)
Child the Compliance with artacycu
"GENERAL PEQUIREMENTS".

NMOCD

This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

DESTRICT I 1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised August 15, 2000

DISTRICT II 811 South First, Artesia, N.M. 88210

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410 OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505 Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT IV 2040 South Pacheco, Santa Fe, NM 87605 ☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API	Number	1(1)2		*Pool Code *Pool Name								
30-039		1803	1	2319 BLANCO MESAVEADE								
Property Co	ode			*Property Name					• Well Number			
7667	49				RINCON		·					412
OGRID No.					-	tor Name						Elevation
18907	1				PURE R	ESOURC	ES				6	750'
					10 Surfa	ce Loc	ation					
UL or lot no.	Section	Township	Range	Lot Idn	Feet from t		rth/South line	Fe	et from the	East,	West line	County
G	26	27-N	7-W		2560'		NORTH		965'	EAS	ST	RIO ARRIBA
			11 Botto	m Hole	Locatio	n If Di	fferent Fr	om	Surface			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from t	he No	rth/South line	e Pe	et from the	East	/West line	County
								<u> </u>				
Dedicated Acres	_	6	Joint or I	nfill	14 Consolidat	ion Code		15 Ord	ler No.			
340.56	E	12	\mathcal{L}									•
NO ALLOWA	ABLE V	VILL BE A	SSIGNED	TO THIS	COMPL	ETION U	JNTIL ALL	INTE	ERESTS I	IAVE B	EEN CO	NSOLIDATED
16							APPROVEI					
		FD	3 1/4"	Y	S 88~	36-58 W	FD 3 1	/4"				
	j		B.L.M. BC 1955	•	2637.	71' (M)	B.L.M.	. BC				RTIFICATION
	ł		1300	1		Ì	1	955	•		-	ion contained herein of my knowledge and
LOT 4	į	VEV EOF	_* 3	LOT 2		İ	LOT 1	l	belief.	. conquest	W 1110 USSE U	y my mounty: am
2014		(4507)	<u> </u>					Ĩ\$₩		4 . 1	\bigvee	
	CV	A, si			0007	1		7.5	911	to	thene	in
<i>/</i>	(8)	NOV		3	4			9.5	Signatur	e e	1-4-4-	
		100				- 1		2829.2	\mathcal{M}	IKE	PIPP	ix
	282	0.00) 🗐				}	z	Printed			
,		LAT. 363	244"N (W NAD 83)	LOT 7	RING	ON UNIT No.	40	AGE	KT-1	PETR.	ENGR.
LOT 5	(C.C.)		73233W	(NAD 83)	Wi /	1	LOT 8		Title			
	~) E27717 9 26 f	d Silver					Į.		6-17	-04	(
	j	A OU SIL DOOR		Đ	1	-	1965'	l	Date	<u> </u>		· · · · · · · · · · · · · · · · · · ·
			2	26	<u> </u>							
	l			1		1	FD 3 1 B.L.M.	BC	18 SI	IDVEV	אס מס	RTIFICATION
						1	1	955	3(NOTION TO IN		MILITICATION
	}					1	LOT 9	1	was platfed	ryy wax ii. from field :	notes of early	m movem on this plat al surveys made by
LOT 12	.	LOT 11			OT 10	1			me or under	my sumf		at the same is true
						ł .		1	and correct	· SON	YYUKO	
						j		l	APRIL	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	MEN	(F)
				1					Date of 6	120	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	1-1
								1	Signature	Total Sea	14831.).	mi O
	ĺ					ļ		1	\	到 \	All I	
		10T 44			TT 15						260	5 6
LOT 13		LOT 14			T 15	1	LOT 16			XM	FESSION	
				1				4		14	1831	:
								l	Certificate	Humber		
				-					_			

DISTRICT I 1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised August 15, 2000

DISTRICT II 811 South First, Artesia, N.M. 88210

DISTRICT III 1000 Rio Brezos Rd., Aztec, N.M. 87410 OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505

Submit to Appropriate District Office State Lease — 4 Copies

Fee Lease - 3 Copies

2040 South Pacheco, Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT ¹API Number Pool Code 71599 Well Number ⁴Property Code ⁵Property Name 26629 RINCON UNIT 412 OGRID No. *Operator Name * Elevation 6750' 8907 PURE RESOURCES ¹⁰ Surface Location UL or lot no. Section Township Range Lot Idn Feet from the North/South line Feet from the East/West line County 7-W **NORTH** 1965' **EAST** RIO ARRIBA G 26 27-N 2560' ¹¹ Bottom Hole Location If Different From Surface UL or lot no. Range Lot Idn Feet from the North/South line Feet from the East/West line Section Township County Dedicated Acres s Joint or Infill 4 Consolidation Code 15 Order No. 339.08 NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION S 88-36-58 W 2637.71' (M) FD 3 1/4' FD 3 1/4" OPERATOR CERTIFICATION B.L.M. BC B.L.M. BC 1955 1955 I hereby certify that the information contained herein LOT 1 LOT 2 LOT 3 LOT 4 RINCON UNIT No. 40 LAT. 36°32'44"N (NAD 83) LOT 7 LOT 8 LONG. 107'32'33"W (NAD 83) LOT 5 LOT 6 1965' **26** FD 3 1/4 B.L.M. BC SURVEYOR CERTIFICATION 1955 certify that the well location shown on this plat LOT 9 **LOT 10** IOT 11 **LOT 12** LOT 14 **LOT 15** LOT 16 **LOT 13** Certificate Numbe

Submit 3 Copies To Appropriate District	. State	e of New Me	xico	Form C-103		
Office District I	Energy, Mine	rals and Natur	al Resources WELL API N	March 4, 2004		
1625 N. French Dr., Hobbs, NM 88240 District II				NO.		
1301 W. Grand Ave., Artesia, NM 8821	0	ERVATION	5. Indicate I	ype of Lease: FEDERAL		
District III 1000 Rio Brazos Rd., Aztec, NM 87410		outh St. Fran	1 51111			
District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505	San	ta Fe, NM 87	6. State Oil FEDERAL:	& Gas Lease No. SF-080385		
	OTICES AND REPORT	S ON WELLS		me or Unit Agreement Name		
(DO NOT USE THIS FORM FOR PRODUCTION OF THE PROPERTY OF THE PR			SUCH			
PROPOSALS.) 1. Type of Well:			8. Well Nun #412	aber		
Oil Well Gas Well	\(\sum_{\text{Other}}\)	· - <u></u>				
2. Name of Operator PURE RESOURCES LP			9. OGRID N	lumber 189071		
3. Address of Operator c/o Ag	ent, Mike Pippin LLC		10. Pool nar	ne or Wildcat		
3104 N. Sullivan, Farmington,		1573	Blanco MV	& Basin DK		
4. Well Location						
Unit Letter G: 1	965 feet from the Ea	st_ line and _	2560 feet from the North line			
Section 26	Township 27	N Range 7	W NMPM Rio Arriba Co	ounty		
			RKB, RT, GR, etc.)			
Pit or Below-grade Tank Application		closures, a form C	-144 must be attached)			
Pit Location: UL G Sect 26 Twp 2	7N Rng 7W Pit type: Dr	illingDepth to C	roundwater <u>>100'.</u> Distance from near	rest fresh water well <u>>1000'.</u>		
Distance from nearest surface water	1000' Below-grade Tank I	ocation UL	SectTwpRng	_;		
feet from theline at	ndfeet from the	line				
	12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:					
PERFORM REMEDIAL WORK		IDON 🗆	REMEDIAL WORK	☐ ALTERING CASING ☐		
TEMPORARILY ABANDON	☐ CHANGE PLANS		COMMENCE DRILLING OPNS.	☐ PLUG AND ☐ ABANDONMENT		
PULL OR ALTER CASING	MULTIPLE COMPLETION		CASING TEST AND CEMENT JOB			
OTHER: Dril	ling Pit Registration	X	OTHER:			
13. Describe proposed or co of starting any proposed	ompleted operations. (Cd work). SEE RULE 11	learly state all p	pertinent details, and give pertiner le Completions: Attach wellbore	at dates, including estimated date diagram of proposed completion		
or recompletion.						
We intend to drill a new MV/DI NMOCD in Aztec, NM.	K well. The drilling pit	will be built an	d lined according to our general p	oit guidelines on file at the		
When the drilling pit is closed,	t will be closed as per or	ur general pit c	losing guidelines on file at the N	MOCD.		
I hereby certify that the informa grade tank has been/will be constructed	tion above is true and co	omplete to the b	est of my knowledge and belief. (a general permit or an (attached) al	further certify that any pit or below-		
SIGNATURE Mike	ppin		gent, Petroleum Engineer	DATE 6/17/04		
Type or print name Mike Pi	opin	E-mail addre	ss: mpippin@ddbroadband.net	Telephone No.(505)327-4573		
(This space for State use)	<u></u>			NOV - 8 2004		
APPPROVED BY Conditions of approval, if any:	MA	TITLE	Y OIL & GAS INDPECTOR, DIST. 6			

PURE RESOURCES RINCON UNIT No. 412, 2560' FNL 1965' FEL SECTION 26, T27N, R7W, N.M.P.M., RIO ARRIBA COUNTY, N. M. GROUND ELEVATION: 6750', DATE: APRIL 28, 2004 CONSTRUCTION ZONE В c 6 (5) A F 0.7 F 6.7 9 C 7.9 90, LAYDOWN S 88° E 1 4 Wellhead to Back Wellhead to Front C 8.5 F 7.8 160 140' TC 0.7 REAR 12 6 **NEW ACCESS** 1356 (0 to 6%) A' F 8.5 (C 6.5 C, F 0.1 $(330' \times 400') = 3.03 \text{ ACRES}$ 2 230' X 300' B' NOTE: DAGGETT ENTERPRISES, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES. NEW MEXICO ONE CALL TO BE NOTIFIED 48 HOURS PRIOR TO EXCAVATION OR CONSTRUCTION. C/L ELEV. A-A 6760 6750 6740 6730 C/L ELEV. B-B 6760 6750 6740 Daggett Enterprises, Inc. Surveying and Oil Field Services P. O. Box 15088 • Familiation, NM 87401 Phys. (305) 326–8019 6730 ELEV. C-C' 6760 Box 15 2 (505) : NEW ME 6750 6740 6730 CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELL PAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION, NOTE:

PURE RESOURCES LP RINCON UNIT #412 MV/DK

1965' FEL, 2560' FNL Unit G Sec. 26 T27N R07W Rio Arriba County, NM

Drilling Program

1. <u>ESTIMATED FORMATION TOPS: (KB)</u>

Formation Name	Depth
San Jose	Surface
Ojo Alamo	2522'
Kirtland	2581'
Fruitland	2830'
Pictured Cliffs	3104'
Cliffhouse	4830'
Menefee	4859'
Point Lookout	5360'
Greenhorn	7282'
Graneros	7376'
Dakota	7500'
Intermediate TD (7")	2900'
TD (4-1/2")	7665'

2. NOTABLE ZONES

Gas or Oil Zones Fruitland	Water Zones	<u>Coal Zone</u> Fruitland
Pictured Cliffs	Ojo Alamo Kirtland	

Cliffhouse Menefee Point Lookout Dakota

Water zones will be protected with casing, cement, and weighted mud. Fresh water found while drilling will be recorded. Oil or gas shows will be tested for commercial potential based on the engineer's recommendations.

PURE RESOURCES LP RINCON UNIT #412 MV/DK

1965' FEL, 2560' FNL Unit G Sec. 26 T27N R07W Rio Arriba County, NM

3. PRESSURE CONTROL: (See Page 5 & 6)

Maximum expected pressure is ~2700 psi. The drilling contract has not yet been awarded, thus the exact BOP model to be used is not yet known. A typical 11" 3,000 psi model is on page #5.

BOP equipment and all accessories will meet or exceed BLM requirements in 43 CFR Part 3160 for a 3000 psi system. A 3000 psi double ram hydraulic BOP will be used. Accumulator system capacity will be sufficient to close all BOPE with a 50% safety factor. Fill, kill, and choke manifold lines will be 2". Accessories will include upper and lower Kelly cocks with handles, stabbing valve to fit drill pipe on floor at all times, string float at bit, 3000 psi choke manifold with 2" adjustable and 2" positive chokes, and pressure gauge. BOPs will be tested every 24 hours. Tests will be recorded on IADC log.

4. CASING & CEMENT

Hole Size	<u>O.D. Weig</u>	ht (lb/ft) Grade	<u>Age</u>	Connection	GL Setting Depth
12-1/4"	9-5/8"	32.3# H-40	New	ST&C	350'
8-3/4"	7"	20# K-55	New	ST&C	2900'
6-1/4"	4-1/2"	11.6# 1-80	New	ST&C	7665'

Surface casing will be cemented to the surface with ~220 cu. ft. (~158 sx) Type III cmt or equivalent (1.39 ft3/sx yield, 14.6 ppg, & 6.7 gps) with 2% CaCl2 and ¼#/sx celloflake. Volume based on 100% excess. We plan to run a minimum of at least 3 centralizers. A wooden wiper plug will be displaced to within 20' of the shoe. WOC = 12 hours. Surface casing will be tested to 500 psi for 15 minutes.

Intermediate casing will be cemented to surface with a single stage. Total cement = 632 cu. ft.. Volumes are calculated at 45% excess. If cement does not circulate to surface, then a temperature survey will be run to determine the actual cement top as needed. WOC = 12 hours. Test to 1000 psi for 15 minutes.

Lead cement will be ~521 cu. ft. (~247 sx) Premium Lite w/2% CaCl2, 1/4#/sx cello flake, 6-1/4#/sx gilsonite, 8% gel mixed at 11.0 gps, 12.1 ppg for a yield of 2.11 cu. ft. per sx.

Tail cement will be ~111 cu. ft. (~80 sx) Type III w/2% CaCl2, 1/4#/sx Cello flake mixed at 6.7 gps, 14.6 ppg for a yield of 1.39 cu. ft. per sx.

Cementing equipment will include a guide shoe, and autofill float collar will be run 20' off bottom. We plan on running at least 10 centralizers.

Production casing will be cemented to surface ensuring cement coverage inside the intermediate casing with a single stage. Total cement = 1200 cu. ft.. Volumes are

PURE RESOURCES LP RINCON UNIT #412 MV/DK

1965' FEL, 2560' FNL Unit G Sec. 26 T27N R07W Rio Arriba County, NM

calculated at 45% excess. If necessary, a CBL will be run during completion operations to insure cement coverage inside the 7" intermediate casing. Casing will be pressure tested to 6000 psi during completion operations.

Lead cement will be ~201 cu. ft. (~85 sx) Premium Lite High Strength FM w/0.3% R-3, 2% KCl, 1/4 sx Cello flake, 0.3% CD-32, 5 st/sx Pheno Seal, 1% FL-52, mixed at 12.7 gps, 11.9 ppg for a yield of 2.37 cu. ft. per sx.

Tail cement will be ~999 cu. ft. (~495 sx) Premium Lite High Strength FM w/0.3% R-3, 2% KCl, ¼#/sx Cello flake, 0.3% CD-32, 5#/sx Pheno Seal, 1% FL-52, mixed at 10.1 gps, 12.5 ppg for a yield of 2.02 cu. ft. per sx.

Cementing equipment will include a guide shoe, and autofill float collar will be run 20' off bottom with a centralized shoe joint and next five joints. Centralizers will be run across the producing zones.

5. MUD PROGRAM

<u>Depth</u>	Type	Wt./ppg.	<u>Vis.</u>	Fluid Loss	PH
0'-350'	FW gel/lime spud mud	8.4-8.7	30-50	NC	10
350'-2900'	FW gel/Polymer	8.3-8.6	30-35	<20cc's	9.5
2900'-7665'	Air &/or Air/mist	N/A	N/A	N/A	N/A

Lost circulation and absorption material will be on location.

6. CORING, TESTING, & LOGGING

No cores, drill stem tests, or open hole logs are planned. A cased hole TDT log will be run from TD through the top of the Mesaverde during completion operations.


7. DOWN HOLE CONDITIONS

No abnormal pressures, temperatures, nor hydrogen sulfide are expected. Maximum pressure will be ~2700 psi.

8. OTHER INFORMATION

The anticipated spud date is December 18, 2004. It is expected it will take ~7 days to drill and ~12 days to complete the well. Completion will start about one month after the spud and will include hydraulic fracturing.

RINCON UNIT WELLS RINCON FIELD RIO ARRIBA COUNTY, NEW MEXICO

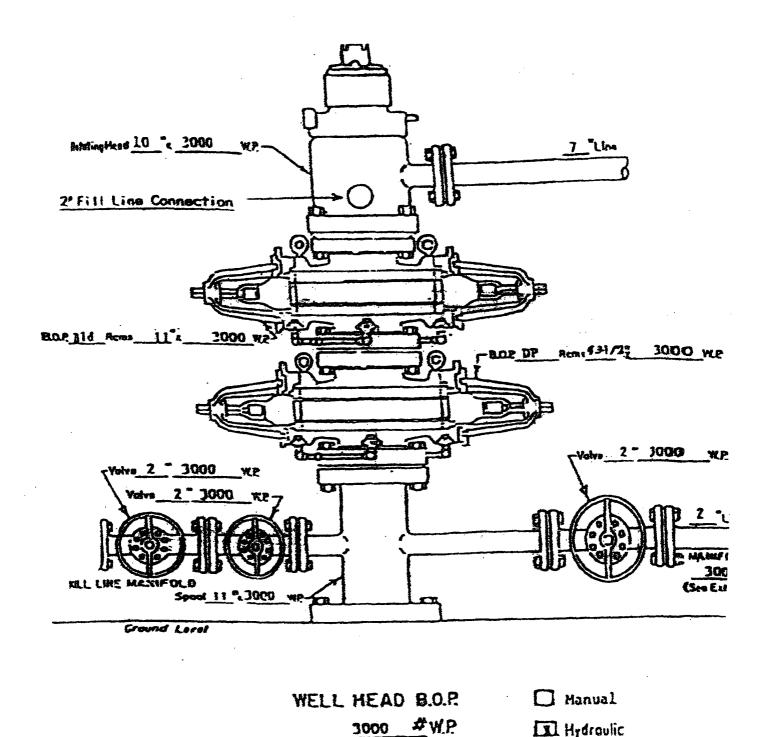


NOTE: Although 3000 psi BOP equipment will be used, equipment determination and line sizing are based on the requirements for 2000 psi BOP equipment due to the known drilling and reservoir conditions.

PAGE #5

ATTACHMENT NO. 1

RINCON UNIT WELLS RINCON FIELD RIO ARRIBA COUNTY, NEW MEXICO

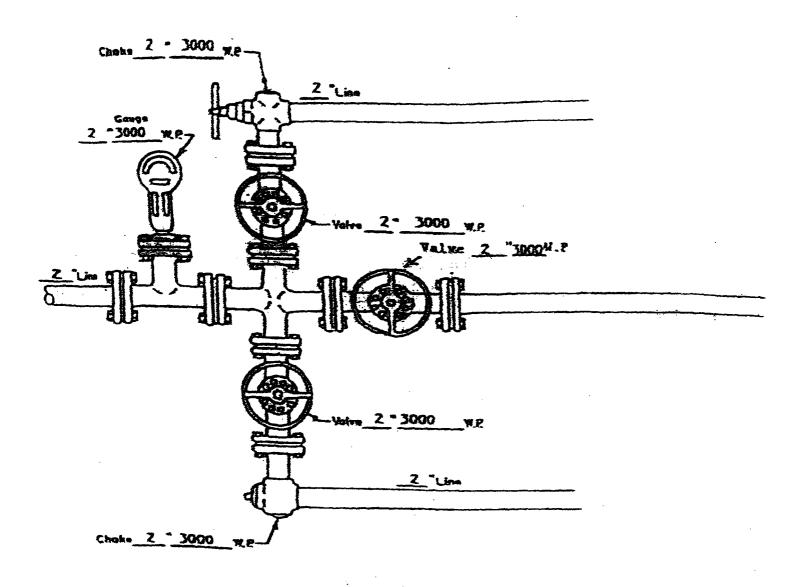

MANIFOLD	T	Manuel
3000 #W.P		Hydraulic

PAGE #6
ATTACHMENT NO. 2