

submitted in lieu of Form 3160-5

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

1. Type of Well

GAS

2. Name of Operator

BURLINGTON

RESOURCES OIL & GAS COMPANY

3. Address & Phone No. of Operator

PO Box 4289, Farmington, NM 87499 (505) 326-9700

4. Location of Well, Footage, Sec., T, R, M

1555' FNL, 1845' FEL, Sec.27, T-30-N, R-11-W, NMPM

5. Lease Number

NMNM02491

6. If Indian, All. or
Tribe Name

7. Unit Agreement Name

Well Name & Number

Federal A #1M

API Well No.

30-045-30910

10. Field and Pool

Otero Chacra/
Blanco Mesaverde

11. County and State

San Juan Co, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment

Type of Action

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other -
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut off
☐ Conversion to Injection

13. Describe Proposed or Completed Operations

The Dakota formation will not be drilled and completed in this wellbore. The well will produce as a Chacra/Mesaverde commingle. The well name of the subject well has been changed from Federal A #1M to **Murphy C #2B**. Attached is the revised C-102 plat and operations plan.

7337

14. I hereby certify that the foregoing is true and correct.

Signed Tammy Jones Title Regulatory Specialist Date 11/1/04

(This space for Federal or State Office use)

APPROVED BY Jim Gresh Title Petr Eng Date 11/4/04

CONDITION OF APPROVAL, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NMOCQ

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 15, 2000

DISTRICT II
811 South First, Artesia, N.M. 88210

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

OIL CONSERVATION DIVISION

2040 South Pacheco
Santa Fe, NM 87505

DISTRICT IV
2040 South Pacheco, Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-30910	² Pool Code 82319/72319	³ Pool Name Otero Chacra/Blanco Mesaverde
⁴ Property Code 7337	⁵ Property Name Murphy C	⁶ Well Number 2B
⁷ GRID No. 14538	⁸ Operator Name BURLINGTON RESOURCES OIL & GAS INC.	⁹ Elevation 5961

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	27	30-N	11-W		1555	NORTH	1845	EAST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

¹² Dedicated Acres Cha-NE/158.62 MV-N/317.76	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

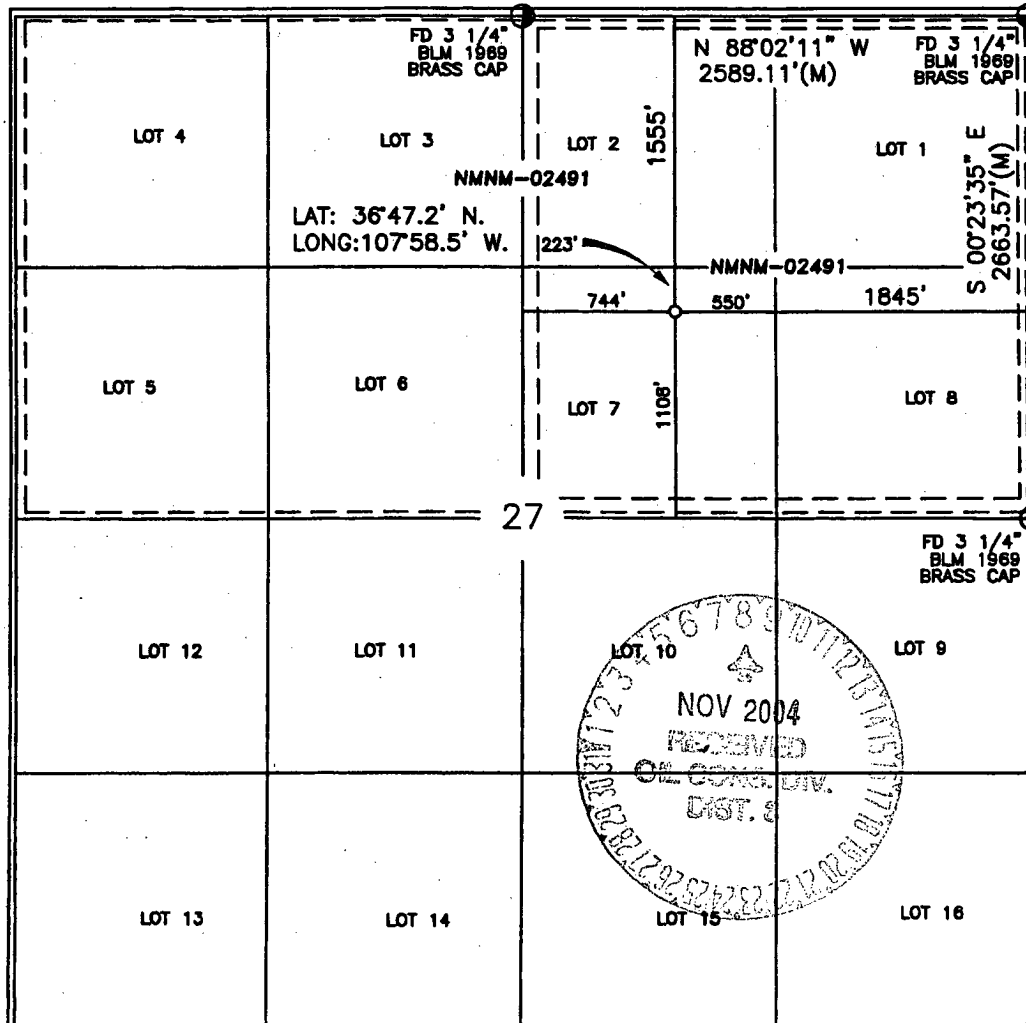

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein
is true and complete to the best of my knowledge and
belief.

Tammy Jones
Signature

Tammy Jones
Printed Name
Regulatory Specialist

Title
Date 10-27-04

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat
was plotted from field notes of actual surveys made by
me or under my supervision, and that the same is true
and correct to the best of my belief.

1-25
Date of Survey
Signature and Seal of Professional Surveyor
8894
Certificate Number

OPERATIONS PLAN

Well Name: Murphy C #2B
Surface Location: 1555' FNL, 1845' FEL, Section 27, T-30-N, R-11-W
San Juan County, Colorado
Latitude 36° 47.2'N, Longitude 107° 58.5'W
Formation: Otero Chacra/Blanco Mesaverde
Elevation: 5961'GR

<u>Formation Tops:</u>	<u>Top</u>	<u>Bottom</u>	<u>Contents</u>
Surface	San Jose	1008'	aquifer
Ojo Alamo	1008'	1103'	aquifer
Kirtland	1103'	1787'	gas
Fruitland	1787'	2344'	gas
Pictured Cliffs	2344'	2490'	gas
Lewis	2490'	3078'	gas
Intermediate TD	2590'		
Huerfanito Bentonite	3078'	3349'	gas
Chacra	3349'	3930'	gas
Massive Cliff House	3930'	4055'	gas
Menefee	4055'	4649'	gas
Point Lookout	4649'		gas
Total Depth	5049'		

Logging Program:

Cased hole logging - Gamma Ray, Cement bond from surface to TD
Open hole logging - none
Mud Logs/Coring/DST - none

Mud Program:

<u>Interval- MD</u>	<u>Type</u>	<u>Weight</u>	<u>Vis.</u>	<u>Fluid Loss</u>
0- 230'	Spud	8.4-9.0	40-50	no control
230- 2590'	LSND	8.4-9.0	30-60	no control
2590- 5049'	Air/Mist	n/a	n/a	n/a

Pit levels will be visually monitored to detect gain or loss of fluid control.

Casing Program (as listed, the equivalent, or better):

<u>Hole Size</u>	<u>Measured Depth</u>	<u>Csg Size</u>	<u>Weight</u>	<u>Grade</u>
12 1/4"	0' - 230'	9 5/8"	32.3#	H-40
8 3/4"	0' - 2590'	7"	20.0/23.0#	J-55
6 1/4"	2590' 2490' - 5049'	4 1/2"	10.5#	J-55

Tubing Program: 0' - 5049' 2 3/8" 4.7# J-55

BOP Specifications, Wellhead and Tests:

Surface to Intermediate TD -

11" 2000 psi minimum double gate BOP stack (Reference Figure #1).
After nipple-up prior to drilling out surface casing, rams and casing will be tested to 600 psi for 30 minutes.

BOP Specifications, Wellhead and Tests (cont'd):Intermediate TD to Total Depth -

11" 2000 psi minimum double gate BOP stack (Reference Figure #1). After nipple-up prior to drilling out intermediate casing, rams and casing will be tested to 1500 psi for 30 minutes.

Surface to Total Depth -

2" nominal, 2000 psi minimum choke manifold (Reference Figure #3).

Completion Operations -

7 1/16" 2000 psi double gate BOP stack (Reference Figure #2). After nipple-up prior to completion, pipe rams, casing and liner top will be tested to 2000 psi for 15 minutes.

Wellhead -

9 5/8" x 7" x 2 3/8" x 2000 psi tree assembly.

General -

- Pipe rams will be actuated once each day and blind rams will be actuated once each trip to test proper functioning.
- An upper kelly cock valve with handle available and drill string valves to fit each drill string will be available on the rig floors at all times.
- BOP pit level drill will be conducted weekly for each drill crew.
- All BOP tests & drills will be recorded in daily drilling reports.
- Blind and pipe rams will be equipped with extension hand wheels.

Cementing:

9-5/8" surface casing - Well already pre-set.

Saw tooth guide shoe on bottom. Bowspring centralizers will be run in accordance with Onshore Order #2.

7" intermediate casing -

Lead w/211 sx Premium Lite with 3% calcium chloride, 0.25 pps celloflake, 5 pps LCM-1, 0.4% fluid loss, 0.4% sodium metasilicate. Tail with 90 sx Type III cmt w/1% calcium chloride, 0.25 pps celloflake, 0.2% fluid loss (574 cu.ft. of slurry, 50% excess to circulate to surface). WOC minimum of 8 hours before drilling out intermediate casing. If cement does not circulate to surface, a CBL or temp survey will be run to determine TOC. Test casing to 1500 psi for 30 minutes.

7" intermediate casing alternative two stage:

Stage collar set 300' above the top of the Fruitland. First stage: Lead with 59 sacks Premium Lite cmt w/3% calcium chloride, 0.25 pps Celloflake, 0.4% fluid loss, 5 pps LCM-1, 0.4% sodium metasilicate. Tail with 90 sacks with Type III cement with 1% calcium chloride, 0.25 pps Celloflake, 0.2% fluid loss. Second stage: cement with 153 sacks with Premium Lite cement with 3% calcium chloride, 0.25 pps Celloflake, 5 pps LCM-1, 0.4% fluid loss, 0.4% sodium metasilicate (574 cu. ft.-50% excess to circulate to surface).

Cement nose guide shoe on bottom with float collar spaced on top of shoe joint. Bowspring centralizers spaced every fourth joint off bottom, to the base of the Ojo Alamo at 1103'. Two turbolating centralizers at the base of the Ojo Alamo at 1103'. Bowspring centralizers spaced every fourth joint from the base of the Ojo Alamo to the base of the surface casing.

4 1/2" Production Liner -

Pump 172 sxs Premium Lite HS FM w/0.25 pps celloflake, 0.3% CD-32, 6.25 pps LCM-1, 1% fluid loss, 6% gel, 7 pps CSE (340 cu.ft., 30% excess to circulate liner). WOC a minimum of 18 hrs prior to completing.

Note: If open hole logs are run, cement volumes will be based on 25% excess over caliper volumes.

Cement nose guide shoe on bottom with float collar spaced on top of shoe joint. The liner hanger will have a rubber packoff.

- If hole conditions permit, an adequate water spacer will be pumped ahead of each cement job to prevent cement/ mud contamination or cement hydration.

Special Drilling Operations (Air/Mist Drilling):

The following equipment will be operational while gas/mist drilling:

- An anchored blooie line will be utilized to discharge all cuttings and circulating medium to the blow pit a minimum of 100' from the wellhead.
- The blooie line will be equipped with an automatic igniter or pilot light.
- Compressors will be located a minimum of 100' from the wellhead in the opposite direction from the blooie line.
- Engines will have spark arresters or water cooled exhaust.
- The rotating head will be properly lubricated and maintained.
- A float valve will be utilized above the bit.
- Mud circulating equipment, water, and mud materials will be sufficient to maintain control of the well.

Additional Information:

- The Chacra and Mesa Verde formations will be completed and commingled.
- No abnormal temperatures or hazards are anticipated.
- Anticipated pore pressures are as follows:

Fruitland Coal	150 psi
Pictured Cliffs	260 psi
Mesa Verde	375 psi
- Sufficient LCM will be added to the mud system to maintain well control, if lost circulation is encountered below the top of the Pictured Cliffs.
- The northeast quarter of Section 27 is dedicated to the Chacra and the north half of Section 27 is dedicated to the Mesaverde in this well.
- This gas is dedicated.

Sean Poyga
Drilling Engineer

November 1, 2004
Date