

RECEIVED

Form 3160-3
(April 2004)

JAN 26 2011

FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Fort Hagon Field Office
Land Management

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NM-6680	
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator Dugan Production Corp		7. If Unit or CA Agreement, Name and No.	
3a. Address 709 East Murray Drive Farmington, NM 87401		8. Lease Name and Well No. Lombardo Com #1	
3b. Phone No. (include area code) 505-325-1821		9. API Well No. 30-045-043-21107	
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface 850' FSL & 990' FWL Lat: 36.10532 N At proposed prod. zone Same as above Long: 107.60442 W		10. Field and Pool, or Exploratory Basin Fruitland Coal	
11. Sec., T. R. M. or Blk. and Survey or Area M Sec. 29, T22N, R7W NMPM		12. County or Parish Sandoval	
12. Distance in miles and direction from nearest town or post office Approx. 40-miles SE of Bloomfield, New Mexico		13. State NM	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 850-Feet	16. No. of acres in lease 320-Acres	17. Spacing Unit dedicated to this well 320.0 Acres (W/2)	
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. N.A.	19. Proposed Depth 965-Feet	20. BLM/BIA Bond No. On File	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) GL-6849-Ft. 6649'	22. Approximate date work will start ASAP	23. Estimated duration 5-Days	

24. Attachments

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS".

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor and appeal pursuant to 43 CFR 3165.4
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature <i>Kurt Fagrelis</i>	Name (Printed/Typed) Kurt Fagrelis	Date 1/17/2011
Title Geologist		
Approved by (Signature) <i>Man Keo</i>	Name (Printed/Typed) Man Keo	Date 6/7/11
Title AEL	Office FFO	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

A water based gel-mud will be used to drill surface and production casing hole.
Standard 2,000 psi BOP will be used to drill production casing hole. The
Fruitland Coal will be perforated from approximately 800 - 815 feet. The
interval will be fracture stiumlated.

NOTIFY AZTEC OCD 24 HRS.
PRIOR TO CASING & CEMENT

JUN 22 2011
AV
NMOCD

BLM'S APPROVAL OR ACCEPTANCE OF THIS
ACTION DOES NOT RELIEVE THE LESSEE AND
OPERATOR FROM OBTAINING ANY OTHER
AUTHORIZATION REQUIRED FOR OPERATIONS
ON FEDERAL AND INDIAN LANDS

RCVD JUN 10 11
OIL CONS. DIV.
DIST. 3

District I
1625 N. French Dr., Hobbs, NM 88240

District II
1301 W. Grand Avenue, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

JAN 26 2011

Form C-102
Revised October 12, 2005
Instructions on back
Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

Farmington Field Office
Bureau of Land Management

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number 30-043-21107	*Pool Code 71629	*Pool Name BASIN FRUITLAND COAL
*Property Code 38665	*Property Name LOMBARDO COM	*Well Number 1
*GRID No. 006515	*Operator Name DUGAN PRODUCTION CORPORATION	*Elevation 6649'

¹⁰ Surface Location

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	29	22N	7W		850	SOUTH	990	WEST	SANDOVAL

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

¹² Dedicated Acres 320.0 Acres - (W/2)	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No
--	-------------------------------	----------------------------------	------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION


¹⁶ 5285.94' Dugan NM-10392 Dugan NM-6680 LAT 36.10532°N LONG 107.60442°W DATUM NAD1983 990' 850' 5233.80'	29	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division <i>Kurt Fagrelus</i> 1/7/2011 Signature Date Kurt Fagrelus Printed Name ¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief Survey Date: OCTOBER 30, 2010 Signature and Seal of Professional Surveyor  JASON C. EDWARDS Certificate Number 15269
---	-----------	--

EXHIBIT B
OPERATIONS PLAN
Lombardo Com #1

APPROXIMATE FORMATION TOPS:

Ojo Alamo	220'
Kirtland	295'
Fruitland	630'
Pictured Cliffs	815'
Total Depth	965'

Catch samples every 10 feet from 750-feet to total depth.

LOGGING PROGRAM:

Run cased hole GR-CCL-CNL from total depth to surface.

CASING PROGRAM:

Hole Size	Casing Size	Wt./ft.	Setting Depth	Grade and Condition
12-1/4"	8-5/8"	24#	120'	J-55
7-7/8"	5-1/2"	15.5#	965'	J-55

Plan to drill a 12-1/4" hole and set 120' of 8-5/8" OD, 24#, J-55 surface casing. Then plan to drill a 7-7/8" hole to total depth with gel-water mud program to test the Fruitland Coal. 5-1/2", 15.5#, J-55 production casing will be run and cemented. Cased hole GR-CCL-CNL log will be run. Productive zone will be perforated and fractured. After frac, the well will be cleaned out and production equipment will be installed.

CEMENTING PROGRAM:

Surface: Cement to surface with 75-cf Class B + 2% CaCl₂.
Circulate to surface.

Production Stage- Cement w/160-sx Premium Lite FM 3% BWOC
Calcium Chloride + 0.25 lbs/sx Celloflake + 5 lbs/sk
LCM-1 + 0.4% BWOC FL-52 + 8% BWOC Bentonite + 0.4%
BWOC Sodium Metasilicate + 112.3% fresh water (12.1
lb/gal, 2.13 cu ft/sx - 165-cu ft slurry). Tail
w/163-sx Type III cement + 1 lb/sk Calcium Chloride +
0.25 lb/sx Celloflake + 0.2% BWOC FL-52 + 59% fresh
water (14.6 lb/gal, 1.38 cu ft/sx-110-cu ft slurry).

Total cement slurry for production stage is 275-cf
Circulate cement to surface.

An adequate spacer will be pumped ahead of the cement slurry to help prevent mud contamination of the cement. An adequate number of casing centralizers will be run through useable water zones to ensure that casing is centralized through these zones. The adequate number of centralizers will be determined based on API standards. Centralizers to impart a swirling action around the casing will be used just below and into the base of the lowest usable water zone. These devices will assist mud displacement, increase cement bonding potential and create an effective hydraulic seal. A chronological log will be kept which records the pump rate, pressure, slurry density, and slurry volume for the cement job. The log will be sent to the BLM after completion of the job.

Maximum Anticipated Bottom Hole Pressure - 300 psi.

Drilling Fluid - will be fresh water with bentonite 8.9#/gal.

WELLHEAD EQUIPMENT:

Huber 8-5/8"x5-1/2" casing head, 1000# WP, tested to 2000#.
Huber 5-1/2"x2-7/8" tubing head, 1000# WP, tested to 2000#.

Blow-Out Preventer Equipment (BOPE): Exhibit D.

Annular preventer, double ram, or 2 rams with one being blind and one being a pipe ram.
Kill line (2" minimum)
1 kill line valve (2" minimum)
1 choke line valve
2 adjustable chokes
Upper kelly cock valve with handle available.
Safety valve and subs to fit all drill string connections in use.
Pressure gauge on choke manifold.
2" minimum choke line.
Fill-up line.

Working pressure for all BOPE will be 2,000 psi or greater.

Will test BOPE (blind rams, pipe rams, choke manifold and surface casing) separately. Each test will include a low pressure test to 250-psig held for five minutes and a high pressure test to 800-psig held for thirty minutes (with no more than a 10-percent pressure drop during the duration of the tests). If a 10-percent or greater pressure drop occurs; a packer will be run to isolate the surface casing and BOPE to locate the source of the leak.

Contacts: Dugan Prod. Corp. Office & Radio Dispatch: 325-1821


<u>Mark Brown</u>	<u>Kurt Fagrelus</u>	<u>John Alexander</u>
327-3632 (H)	325-4327 (H)	325-6927 (H)
320-8247 (M)	320-8248 (M)	320-1935 (M)

DUGAN PRODUCTION CORPORATION LOMBARDO COM #1

850' FSL & 990' FWL, SECTION 29, T22N, R7W, N.M.P.M.

SANDOVAL COUNTY, NEW MEXICO


EXHIBIT E.

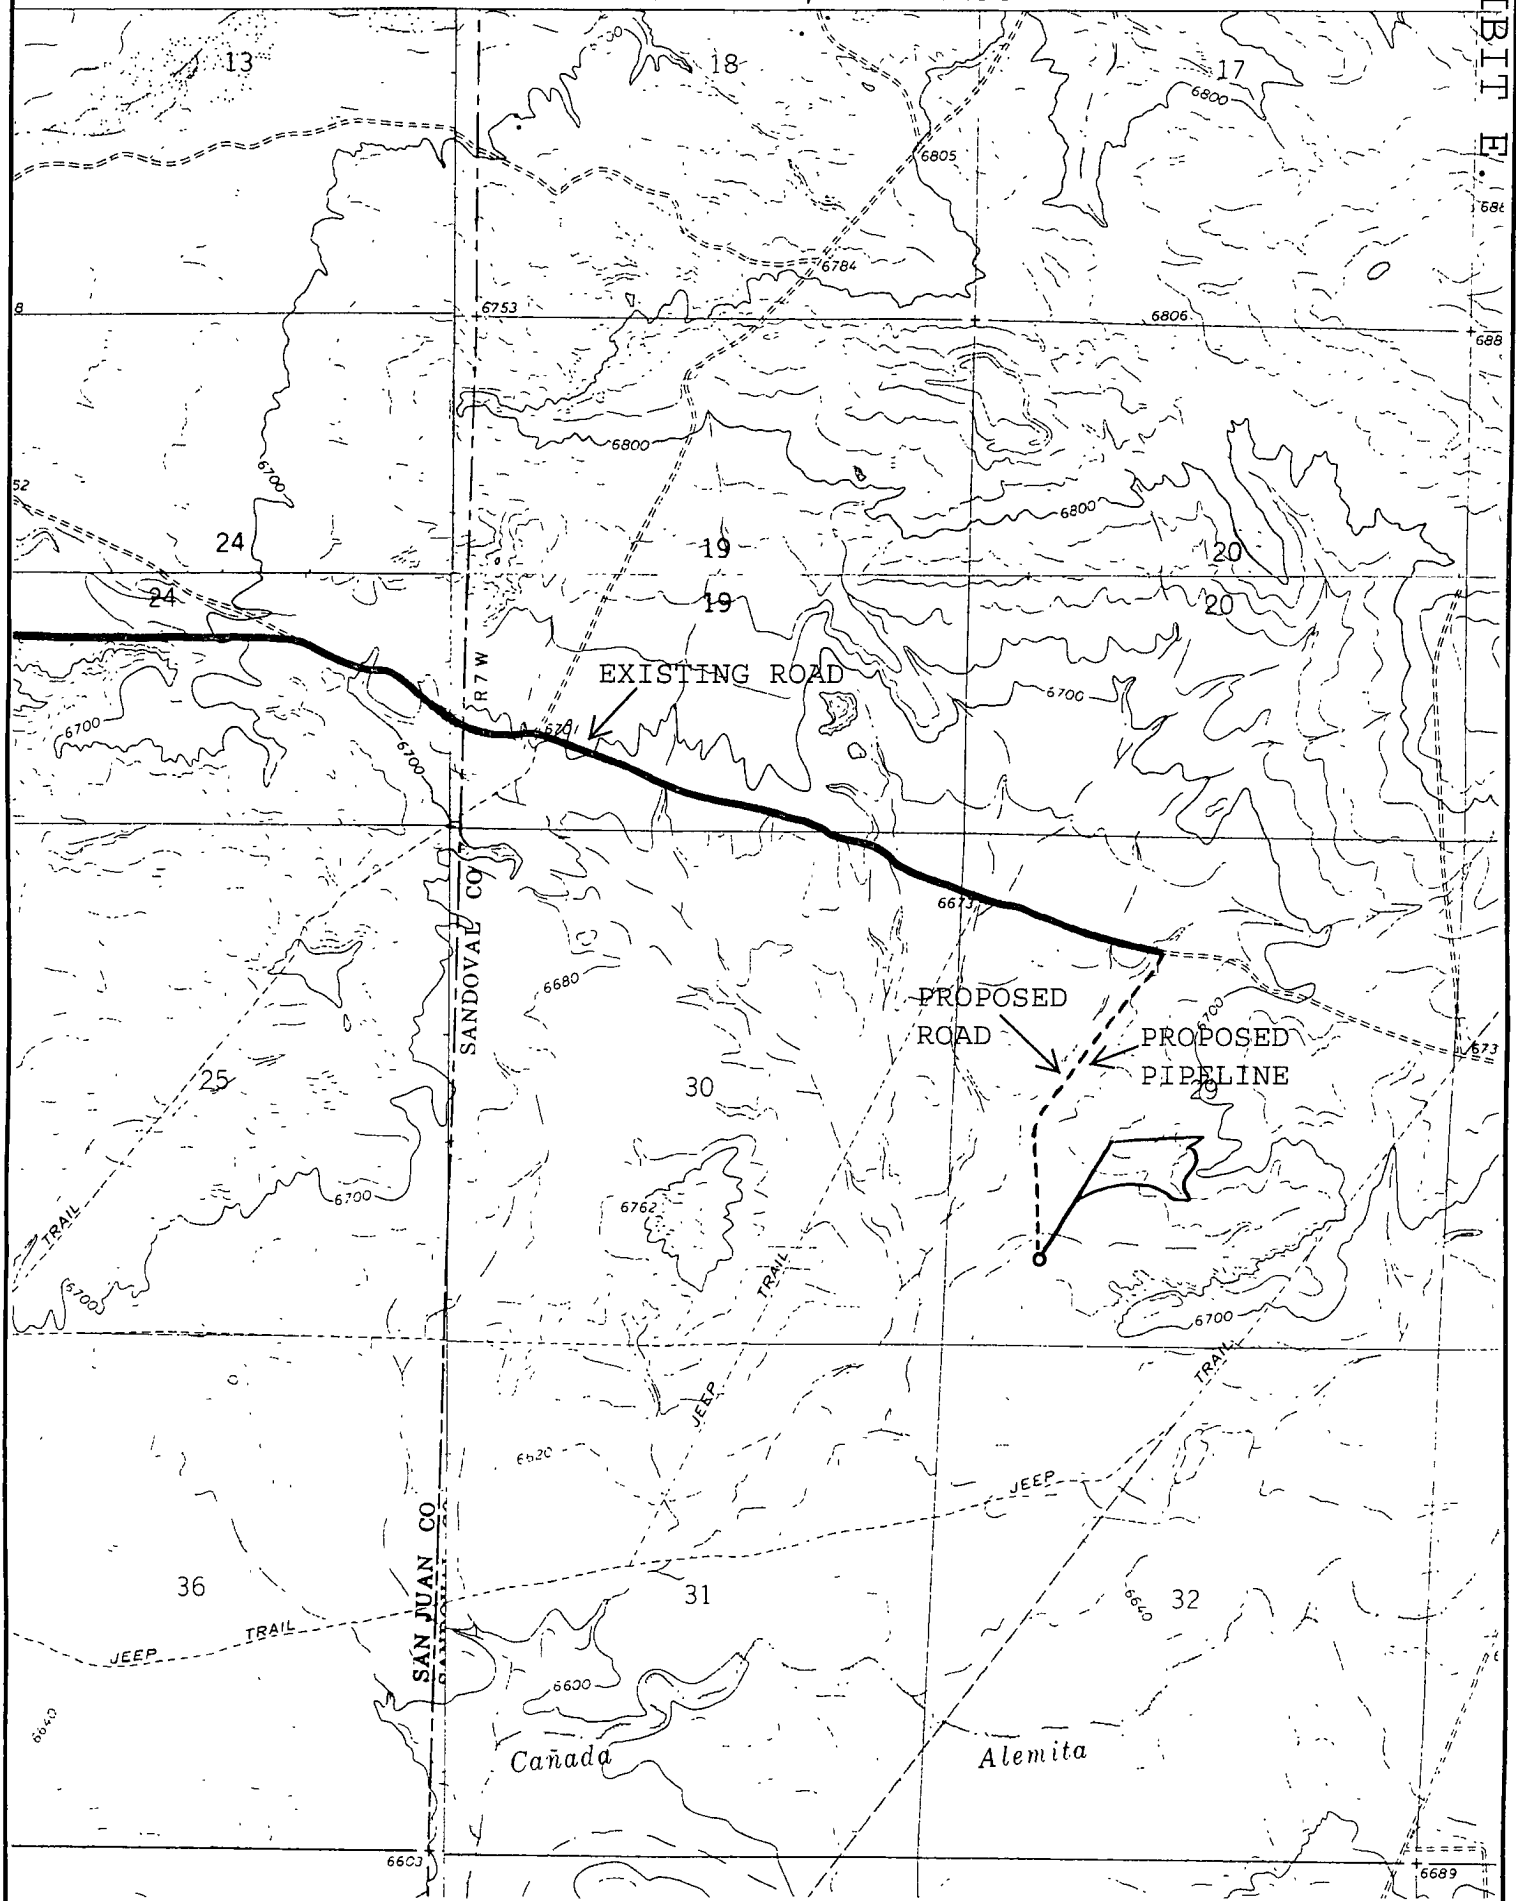

Well Control Equipment Schematic for 2,000 psi BOP


EXHIBIT D.

BOP Stack

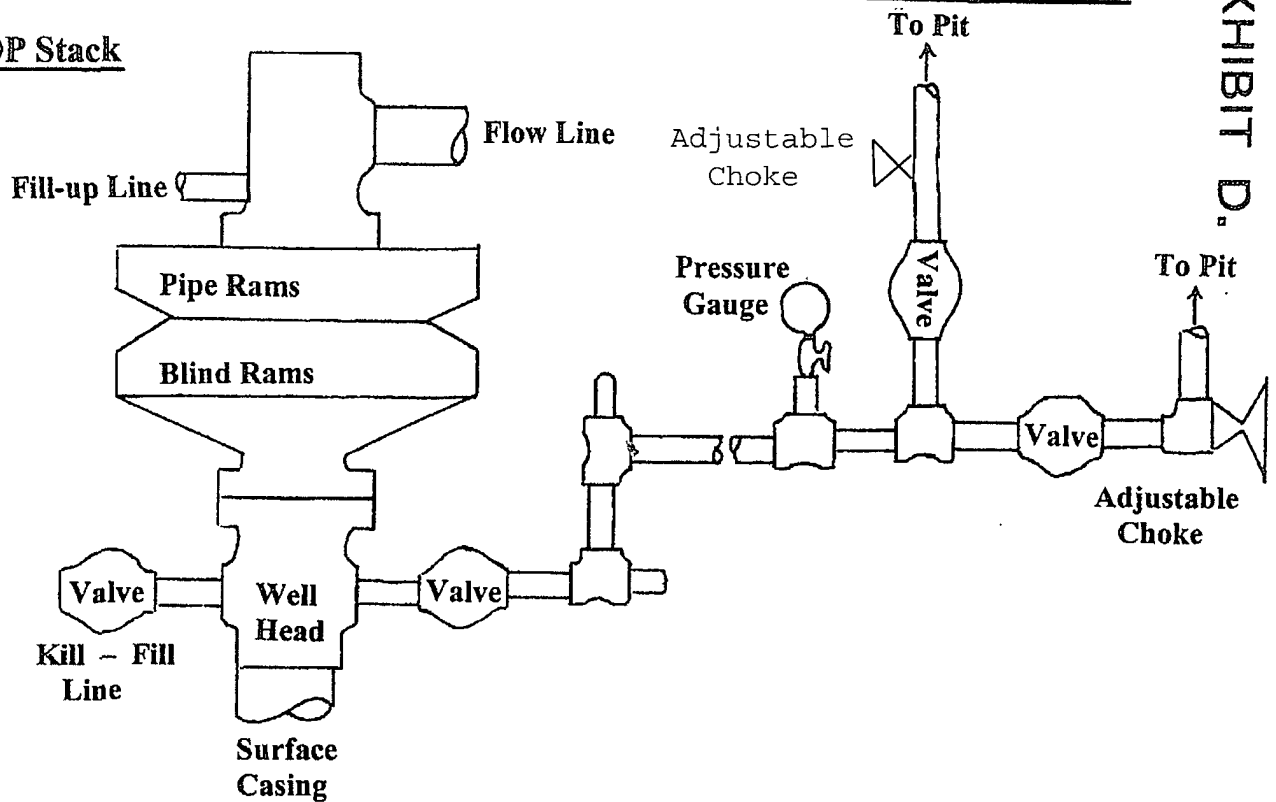

Choke & Kill

Manifold

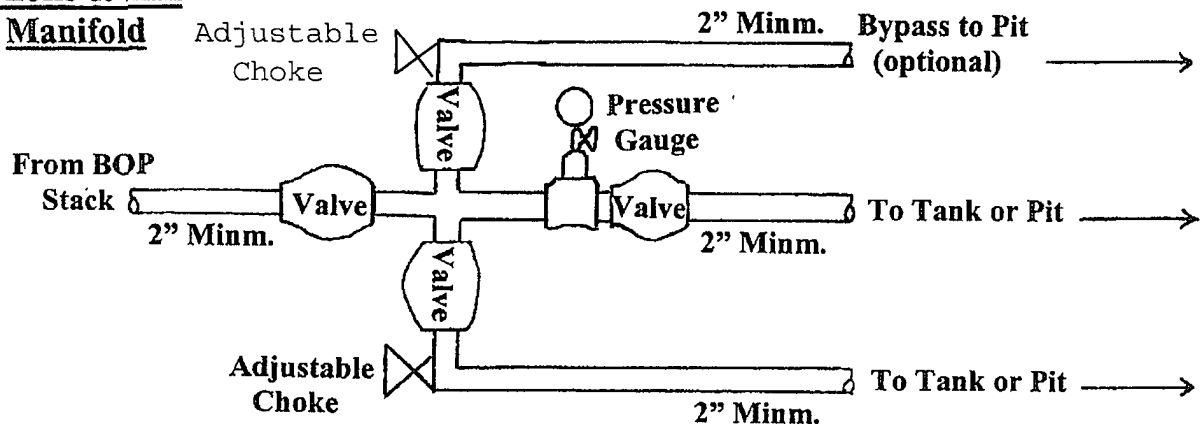

Working Pressure for all equipment is 2,000 psi or greater

DUGAN PRODUCTION CORP.
Lombardo Com #1