

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED  
OMB No. 1004-0136  
Expires January 31, 2004

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		297 JUN 27 AM 10:28	5. Lease Serial No. NM 099719
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		RECEIVED 210 FARMINGTON NM	6. If Indian, Allottee or Tribe Name
2. Name of Operator SG Interests I, LTD c/o NIKA Energy Operating			7. If Unit or CA Agreement, Name and No. Federal 20-5-7
3a. Address P.O. Box 2677 Durango, CO 81302	3b. Phone No. (include area code) (970) 259-2701		8. Lease Name and Well No. 2
4. Location of Well (Report location clearly and in accordance with any State requirements *) At surface 1393' FNL & 1805' FWL At proposed prod. zone			9. API Well No. 30-031-21101
14. Distance in miles and direction from nearest town or post office* approximately 20 miles south of Counselors, New Mexico		12. County or Parish McKinley	13. State NM
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1393'	16. No. of Acres in lease 1,439.28	17. Spacing Unit dedicated to this well W/2 319.28	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See attached map	19. Proposed Depth 975'	20. BLM/BIA Bond No. on file PIB0003277 NM 2559	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 6,759 GR	22. Approximate date work will start* as soon as permitted	23. Estimated duration 1 month	
24. Attachments			

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 	Name (Printed/Typed) William Schwab III	Date 6/26/2007
Title President NIKA Energy Operating/ Agent for SG Interests I, LTD		
Approved by (Signature) 	Name (Printed/Typed)	Date 8/2/07
Title Acting AAM Minerals	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

SG Interests I, LTD. proposes to drill a well to develop the Basin Fruitland Coal formation at the above described location in accordance with the attached drilling and surface use plans.

The surface is under jurisdiction of the Bureau of Land Management, Farmington Field Office.

This location has been archaeologically surveyed by Aztec Archaeological Consultants. Copies of their report have been submitted directly to the BLM.

NOTIFY AZTEC OCD 24 HRS.  
PRIOR TO CASING & CEMENT

RCVD AUG3'07  
OIL CONS. DIV.  
DIST. 3

NMOC 08-0001  
8 BH

DRILLING OPERATIONS AUTHORIZED ARE  
SUBJECT TO COMPLIANCE WITH ATTACHED  
"GENERAL REQUIREMENTS".

This action is subject to technical and  
procedural review pursuant to 43 CFR 3165.3  
and appeal pursuant to 43 CFR 3165.4

See corrected plat on next page.

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised June 10, 2003  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

RECEIVED  
2007 JUN 27 AM 10:57

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-03-21101	Pool Code 71629	Pool Name Basin Fruitland Coal
Property Code 36639	Property Name FEDERAL 20-5-7	Well Number 2
OGRID No. 20572	Operator Name SG INTERESTS I, LTD.	Elevation 6759

10 Surface Location

UL or lot no. F	Section 7	Township 20 N	Range 5 W	Lot Idn	Feet from the 1393	North/South line North	Feet from the 1805	East/West line West	County McKinley
--------------------	--------------	------------------	--------------	---------	-----------------------	---------------------------	-----------------------	------------------------	--------------------

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 319.28 w/2		Joint or Infill		Consolidation Code		Order No.			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16 19.97 Ch. 20.00 Ch. S 89° 52' W 40.00 Ch. 1393' Lat. 35.98188° N Long. 107.40958° W Sec. 7 Lot 1 Lot 2 Lot 3 Lot 4 19.85 Ch. 20.00 Ch. S 89° 52' W 40.00 Ch.	17 <b>OPERATOR CERTIFICATION</b> I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Signature: <i>William E. Mahinke II</i> Printed Name: William E. Mahinke II Title and E-mail Address: Asst. Eng. SG Interests Date: 6/26/2007	18 <b>SURVEYOR CERTIFICATION</b> I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my ability. Date of Survey: 18 APR 2007 Signature and Seal of Professional Surveyor: <i>William E. Mahinke II</i> Certificate Number: 8466
---	--	---

Resubmit

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1090 Rio Branos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals & Natural Resources Department  
**OIL CONSERVATION DIVISION**  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised October 12, 2005  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

☐ AMENDED REPORT

**WELL LOCATION AND ACREAGE DEDICATION PLAT**

* API Number <b>30 031-21601</b>		* Pool Code <b>71629</b>	* Pool Name <b>FRUITLAND COAL</b>
* Property Code	* Property Name <b>FEDERAL 20-5-7</b>		* Well Number <b>2</b>
* OGRID No. <b>020572</b>	* Operator Name <b>SG INTERESTS I, LTD.</b>		* Elevation <b>6759</b>

**10 Surface Location**

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
<b>F</b>	<b>7</b>	<b>20N</b>	<b>5W</b>		<b>1393</b>	<b>North</b>	<b>1805</b>	<b>West</b>	<b>McKinley</b>

**11 Bottom Hole Location If Different From Surface**

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

* Dedicated Acres <b>319.28</b>	* Joint or Infill	* Consolidation Code	* Order No.
------------------------------------	-------------------	----------------------	-------------

**RCVD AUG 10 '07**  
**OIL CONS. DIV.**  
**DIST. 3**

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

<p>16</p> <p>19.97 Ch.      20.00 Ch.      S 89°52' W      40.00 Ch.</p> <p>Lot 1</p> <p>80.00 Ch.</p> <p>1393'</p> <p>1805'</p> <p>Lot 2</p> <p>Lat. 35.98158° N Long. 107.40958° W</p> <p>Sec.</p> <p>7</p> <p>Lot 3</p> <p>Lot 4</p> <p>19.85 Ch.      20.00 Ch.      S 89°52' W      40.00 Ch.</p> <p>North</p> <p>80.00 Ch.</p>		<p>17 OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>William Schwab</i>      8/7/2007 Signature      Date</p> <p><i>William Schwab</i> Printed Name</p>
<p>18 SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>Date of Survey: _____ Signature and Seal of Professional Surveyor: _____ <i>William E. Mahrke II</i> Certificate Number: <b>8466</b></p>		

Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
May 27, 2004

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. <u>30-031-21101</u>
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input type="checkbox"/> FED <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No. Federal NMNM 099732
7. Lease Name or Unit Agreement Name Federal 20-5-7
8. Well Number <u>#2</u>
9. OGRID Number
10. Pool name or Wildcat Basin Fruitland Coal

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A  
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH  
PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator SG Interests I, Ltd

3. Address of Operator

C/O Nika Energy Operating, PO Box 2677, Durango, CO, 81303

4. Well Location

Unit Letter F: 1393 feet from the North line and 1805 feet from the West line

Section 7 Township 20N Range 5W NMPM County McKinley

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
6,759'

Pit or Below-grade Tank Application ☒ or Closure ☐

Pit type Drilling Depth to Groundwater 100 Distance from nearest fresh water well >1,000 ft Distance from nearest surface water >500 ft

Pit Liner Thickness: 12 mil Below-Grade Tank: Volume 1000 Bbls; Construction Material Synthetic

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: Pit Application ☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Drilling/Completion pit to be located approximately 15 feet from well head. Pit multi-use drilling and completion to avoid additional site disturbance and pit will be considered out of service once production tubing set. Pit to be 75 feet long by 15 feet wide by 10 feet deep. Pit to be constructed, operated and closed in accordance with NMOCD guidelines and SGI procedures

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE [Signature] TITLE Agent for SG Interests, Ltd. DATE 8/26/2007

Type or print name William Schwab III


E-mail address: tripp@nikaenergy.com

Telephone No. 970-259-2701

For State Use Only

APPROVED BY: [Signature] TITLE Deputy Oil & Gas Inspector, DATE AUG 6 2007  
Conditions of Approval (if any): District #3

SG INTERESTS I, LTD.  
 FEDERAL 20-5-7 #2  
 1393'FNL & 1805'FWL  
 Sec.7, T20N, R5W, NMPM  
 McKinley Co., NM

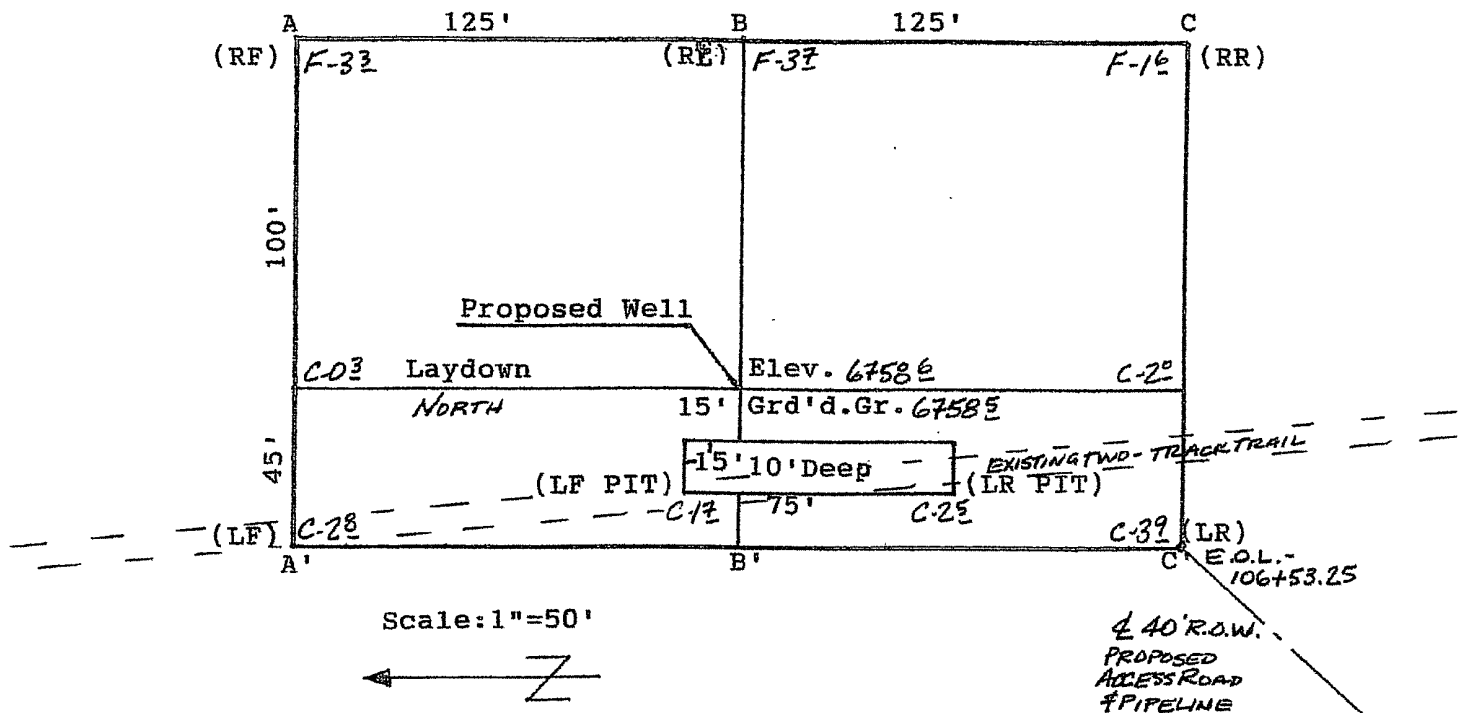

A-A'	Vert.: 1"=30'	Horiz.: 1"=50'	C/L
6760			
6750			
B-B'			
6760			
6750			
C-C'			
6760			
6750			

CASING AND CEMENTING PROGRAM:

<u>Interval</u>	<u>Size, Wt, Grade, Thread</u>	<u>Depth</u>	<u>Cement</u>
Surface	8-5/8", 24#, J-55, ST&C	180'	125 sx Class B. 2% CaCl, $\frac{1}{4}$ #sx celloflake
Production	4-1/2", 10.5#, J-55, ST&C	TD	329 sx Class B. $\frac{1}{4}$ #sx celloflake, 3# Gilsonite

WELLHEAD: 3000# Independent Style

BLOWOUT PREVENTION EQUIPMENT REQUIREMENTS:

<u>Description</u>	<u>Rating</u>
Double Ram Type Preventer	2000 psi
Rotating Head	2000 psi

BOPE testing will be done by third party testers in accordance with Onshore Order No. 2. The test must be performed and recorded using a test pump, calibrated test gauges and properly calibrated strip or chart recorder. The test gauges and recorders must be of the proper range and resolution commensurate with the authorized test pressure. The test must be recorded in the driller's log and will include a low pressure test requirement of 250 psig held for 5 minutes and a high pressure test requirement held for 10 minutes. Casing pressure tests must be held for 30 minutes with no more than 10 percent pressure drop during the test.

GEOLOGIC PROGNOSIS:

Elevations:           GL ~ 6759'

Formation Tops:

<u>Formation</u>	<u>Depth</u>
Ojo Alamo	275'
Kirtland	375'
Fruitland	550'
Coal Top	750'
PC	775'
Total Depth	975'

Note: TD will be 200' below the lowest coal. The company man will be on location once coals are penetrated until TD to monitor drilling breaks and to insure that 200' of rathole is drilled. When the hole is logged, if a coal zone is indicated within 150' of bottom, additional hole is to be drilled to provide 200' of rathole.

MUD PROGRAM:

A fresh water native mud (using lime, benex & gel additions) will be used to drill the surface hole. The 7-7/8" hole should be drilled with native mud and a LSND mud as necessary for hole stability just before the top of the Fruitland formation is encountered.

At the top of the Fruitland formation mud weights should be sufficient to control pressures; viscosity should be in the 30 - 50 sec range with a water loss of 8 - 10 cc, as needed.

The Fruitland Coals are expected to be under-pressured to normal-pressured and may encounter lost circulation. LCM should be stored on location and used as needed in the event of lost circulation. Barite should also be on location in the event an over-pressured zone is encountered and a kick is taken.

## CASING AND CEMENTING PROCEDURE:

Note: Notify BLM 24 hours prior to spud and testing of BOP's and cementing. 505-599-8907. Note the new (June 1, 2005) Federal (BLM) requirements for the testing and test recording of the Blow-out Preventer Equipment. A copy is attached to the approved APD.

### Surface Casing:

1. Drill to a minimum of 180' to accommodate tallied 8 5/8" casing plus 3'. Casing tally to be taken on location.
2. Use a landing joint of 8 5/8" casing to set casing at ground level. Guide shoe on casing should be not more than 2 feet off bottom. Casing head flange to be set at ground level.
3. Displace hole with casing volume of fresh water ahead of cement.
4. Pump Class B cement with 2% CaCl at 5-7 barrel per minute.
5. Drop top plug and displace with fresh water when preflush returns are observed at the surface. Do not over-displace.
6. If plug does not bump, hold pressure for a minimum of three hours.
  - a. Wait on cement a minimum of 8 hours or until surface samples are hard \*, whichever is longer before nipping up the BOP. Pressure test casing and BOP to 1500 psig for 30 minutes. Low pressure test BOP and Casing 250# for 10 minutes.
    1. \* Note: The BLM requirement is a minimum of 250 psi @ 60degrees F compressive strength before BOP may be nipped up.
    2. Notes: Use a standard 8 5/8" guide shoe, an 8 5/8" insert float, 3 centralizers and 1 stop ring. Set insert on top of first joint. Bakerlok shoe, float collar and bottom two joints of casing.



Production Casing:

1. Roll casing off truck with thread protectors in place.
2. Visually inspect, rabbit, number, and tally casing on racks. Remove thread protectors and clean threads. Use quick release protectors while running casing. Do not move or roll casing without thread protectors in place.
3. Change out pipe rams to accommodate 4-1/2" casing.
4. Bakerlok 4-1/2" float shoe to bottom of first joint of casing.
5. Bakerlok 4-1/2" differential float collar to top of first joint of casing. Bakerlok second joint of casing into top of float collar. Run "marker joint" 100' above top coal as per openhole logs.
6. Casing should be made up to proper torque (1320 ft-lb for 10.5# or 1540 ft-lb for 11.6#) using an API thread compound.
7. Casing should be run no faster than 2 feet per second (20 seconds per 40 foot joint). At the first indication of mud loss, the running time should be doubled to 40 seconds per joint (1 foot per second).
8. Break circulation at 500 feet and one joint above TD. Circulate a minimum of 15 minutes. Make sure that the hole is not flowing. Adjust mud properties as necessary. Circulate the last joint of casing to TD. Kick pumps in slowly to minimize surge pressures.
9. Turbolizing centralizers should be run on each of the first 10 joints and joint 12, 14, and 16. A stop-ring should be used to hold the first centralizer in place. Place the remaining centralizers on collars.
10. After casing is landed at TD, circulate hole until mud properties measured at the flowline are within the ranges given in the "Mud Program" of this drilling prognosis.
11. Rig up rotational cementing head and return lines. Chixson should be long enough to allow 25'-30' reciprocation.
12. Pump 10 barrels of fresh water. Pump 20 barrel chemical wash. Pump cement slurry. Wash lines.
13. Drop top plug and displace with water. Do not over-displace. Pipe should be rotated at 10-20 RPM or reciprocated at least 20 feet every two to three minutes throughout displacement.
14. Bump plug with 500 psi over final displacement pressure. Hold pressure for 5 minutes. If plug does not bump, hold initial shut down pressure on casing for 5 minutes. Then check to see that float is holding (flow back into cement pump tank).

SG Interests I, Ltd.  
(Agent: Nika Energy Operating, LLC)  
PO Box 2677  
Durango, CO 81302  
(970) 259-2701

Federal 20-5-7 #2  
NW Sec 7-20N-R5W  
1393' FNL & 1805' FWL  
McKinley County, New Mexico

#### EIGHT POINT DRILLING PROGRAM

1. Estimated Formation Tops:

Ojo Alamo	275'
Kirtland	375'
Fruitland	550'
Coal Top	750'
PC	775'
Total Depth	975'

2. Estimated Depth of Anticipated Minerals:

Fruitland (Gas)	750'
-----------------	------

3. Minimum Specifications for Pressure Control Equipment:

BOP equipment and accessories will meet or exceed BLM requirements outlined in 43 CFR Part 3160.

A 2000 psig double ram hydraulic BOP will be used (see attached diagram). Accessories to the BOP will meet BLM requirements for a 2000 psig system. The accumulator system capacity will be sufficient to close all BOPE with a 50% safety factor. Fill line, kill line and line to choke manifold will be 2". BOP's will be function tested every 24 hours and will be recorded on IADC log.

Surface casing will be tested to 1500 psig for 30 minutes.

## Eight Point Drilling Program - Federal 20-5-7 #2

### Page 2

Accessories to BOPE will include upper and lower Kelly cocks with handles, stabbing valve to fit drill pipe on floor at all times, string float at bit, 2000 psig choke manifold with 2" adjustable and 2" positive chokes, and pressure gauge.

#### 4. Casing and Cementing Program:

<u>Hole Size</u>	<u>Interval</u>	<u>Csg Size</u>	<u>Wt, Grd, Jt</u>
12-1/4"	0-180'	8-5/8"	24#, J-55, STC
7-7/8"	0-975'	4-1/2"	10.5#, J-55, STC

Surface Casing will be cemented with 125 sx (148 cu ft) class B w/2% CaCl and 1/4#/sx of celloflake (Yield = 1.18 cuft/sx, Weight = 15.6 #/gal). Cement volumes include excess to circulate cement to surface. A guide shoe, insert float and three (3) centralizers will be used. WOC time is 8 hours. The casing will be pressure tested to 1500 psig.

Production Casing will be cemented with 329 sx (388 cu ft) class B w/2% CaCl and 1/4#/sx celloflake (Yield = 1.18 cuft/sx, Weight = 15.6 #/gal). Cement volume includes excess to circulate cement to surface. In the event cement is not circulated a temperature survey will be run to determine the actual cement top. Cementing equipment will include a guide shoe, float collar and 7 centralizers. Class G or H cement may be used depending on availability of Class B.

#### 5. Mud Program:

A native water based mud system (FW) will be used initially followed by a low-solids, non-dispersed gel system (LSND) as needed to condition the hole for logs. Adequate amounts of lost circulation and weighting material will be on location if needed as well as sorbitive agents to handle potential spills of fuel or lubricants.

<u>Depth</u>	<u>Type</u>	<u>Wt (ppg)</u>	<u>Vis (sec)</u>	<u>Wtr loss</u>
0-180'	FW	± 8.5	30-33	NC
180'-TD	FW & LSND	± 8.7-9.1	30-50	8-10 cc

6. Testing, Coring and Logging Program:

No DST's or cores are planned. Openhole logs will include GR, Induction, Density and Caliper Logs. The GR-Density logs will be run from TD to the top of the Fruitland formation. GR-Induction-Caliper logs will be run from TD to the bottom of the surface casing.

7. Anticipated Abnormal Pressures and Temperatures:

No abnormal pressures or temperatures are expected in this well. Maximum anticipated Fruitland reservoir pressure is 300 psig with a normal temperature gradient.

8. Operations:

Anticipated spud date is July 2007 or as soon as permits are received and work can be scheduled. Estimated drilling time is 4 - 5 days. The Fruitland will be completed as a cased hole completion, perforated and hydraulically fracture stimulated. Completion operations are expected to take 5 - 7 days and will commence as soon after completion of drilling operations and scheduling allow.

# 2-M SYSTEM

