

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NM 099718
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator SG Interests I, LTD c/o NIKA Energy Operating		7. If Unit or CA Agreement, Name and No. Federal 20-5-6
3a. Address P.O. Box 2677 Durango, CO 81302		8. Lease Name and Well No. 3
3b. Phone No. (include area code) (970) 259-2701		9. APL Well No. 30-031-21102
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 1865' FSL & 890' FWL At proposed prod. zone		10. Field and Pool, or Exploratory Basin Fruitland Coal
14. Distance in miles and direction from nearest town or post office* approximately 19 miles south of Counselors, New Mexico		11. Sec., T., R., M., or Blk. and Survey or Area L Section 6. 20N. 5W
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 890'		12. County or Parish McKinley
16. No. of Acres in lease 1,650.94		13. State NM
17. Spacing Unit dedicated to this well W/2 306.5		
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See attached map 1075'		20. BLM/BIA Bond No. on file PIB0003277
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 6,787 GR		23. Estimated duration 1 month
22. Approximate date work will start* as soon as permitted		
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 	Name (Printed/Typed) William Schwab III	Date 7/04/07
Title President NIKA Energy Operating/ Agent for SG Interests I, LTD		
Approved by (Signature) 	Name (Printed/Typed)	Date 8/2/07
Title Acting AFM Minerals		
Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		
Conditions of approval, if any, are attached.		

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RCVD AUG3'07

SG Interests I, LTD. proposes to drill a well to develop the Basin Fruitland Coal formation at the above described location in accordance with the attached drilling and surface use plans.

The surface is under jurisdiction of the Bureau of Land Management, Farmington Field Office.

OIL CONS. DIV.

This location has been archaeologically surveyed by Aztec Archaeological Consultants. Copies of their report have been submitted directly to the BLM.

DIST 3

NOTIFY AZTEC OCD 24 HRS.
PRIOR TO CASING & CEMENT

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS".

This action is subject to technical and
procedural review pursuant to 43 CFR 3165.3
and appeal pursuant to 43 CFR 3165.4

NMOCD 8-26-07
BH

See correct plat on next page.

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-102

Revised June 10, 2003

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-031-21102		Pool Code 71629		Pool Name Basin Fruitland Coal	
Property Code 36640		Property Name FEDERAL 20-5-6			Well Number 3
GRID No. 20572		Operator Name SG INTERESTS I, LTD.			Elevation 6787

10 Surface Location

UL or lot no. 6	Section 6	Township 20 N	Range 5 W	Lot Idn	Feet from the 1865	North/South line South	Feet from the 890	East/West line West	County McKinley
--------------------	--------------	------------------	--------------	---------	-----------------------	---------------------------	----------------------	------------------------	--------------------

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
<hr/>									
Dedicated Acres 306.5	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WELL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16 19.70 Ch. 20.00 Ch. N 89°29' W 40.00 Ch.				17 OPERATOR CERTIFICATION	
Lot 4 Lot 3 Lot 2 Lot 1				I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.	
77.19 Ch. Lot 5				Signature <i>William E. Mahnke II</i>	
Sec. 6				Printed Name Agent for SG Interests	
Lot 6 890'				Title and E-mail Address sg@crkenergy.com	
Lot 7 1865'				Date 11/15/2007	
North 40.00 Ch. 1865'				18 SURVEYOR CERTIFICATION	
Lot 7 1865'				I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.	
19.97 Ch. 20.00 Ch. S 89°52' W 40.00 Ch.				Date of Survey 19 APR 2007	
				Signature and Seal of Professional Surveyor <i>William E. Mahnke II</i>	
				Certificate Number 8466	

Resubmit

see correct plat next page

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30 031 21102		Pool Code 71629	Pool Name FRUITLAND COAL
Property Code 30040	Property Name FEDERAL 20-5-6		Well Number 3
OGRID No. 020572	Operator Name SG INTERESTS I, LTD.		Elevation 6787

10 Surface Location									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
6	6	20N	5W		1865	South	890	West	McKinley

11 Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres W. 306.5		Joint or Infill		Consolidation Code		Order No.			

RCVD AUG 10 '07
OIL CONS. DIV.
DIST. 3

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

16	19.70 Ch.	20.00 Ch.	N 89° 29' W	40.00 Ch.
77.19 Ch.	Lot 4	Lot 3	Lot 2	Lot 1
	Lot 5			
	Lot 6	Lat. 35.99050° N Long. 107.41267° W	6	
North	890'	1865'		
	Lot 7			
19.97 Ch.	20.00 Ch.	S 89° 32' W	40.00 Ch.	

17 OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or undivided mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: *William Schabert* Date: *8/7/2007*
Printed Name: **William Schabert**

18 SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date of Survey: **19 Apr 2007**
Signature and Seal of Registered Surveyor: *William E. Mahnke II*
Certificate Number: **8466**

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. <u>30-031-20102</u>
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input type="checkbox"/> FED X
6. State Oil & Gas Lease No. Federal NMNM 099718
7. Lease Name or Unit Agreement Name Federal 20-5-6
8. Well Number #3
9. OGRID Number
10. Pool name or Wildcat Basin Fruitland Coal

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator SG Interests I, Ltd

3. Address of Operator
C/O Nika Energy Operating, PO Box 2677, Durango, CO, 81303

4. Well Location
Unit Letter L: 1865 feet from the South line and 890 feet from the West line
Section 6 Township 20N Range 5W NMPM County McKinley

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
6,787'

Pit or Below-grade Tank Application ☒ or Closure ☐

Pit type Drilling Depth to Groundwater 100 Distance from nearest fresh water well >1,000 ft Distance from nearest surface water >500 ft

Pit Liner Thickness: 12 mil Below-Grade Tank: Volume 1000 Bbls; Construction Material Synthetic

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
OTHER: Pit Application <input checked="" type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Drilling/Completion pit to be located approximately 15 feet from well head. Pit multi-use drilling and completion to avoid additional site disturbance and pit will be considered out of service once production tubing set. Pit is to be 75 feet long by 15 feet wide by 10 feet deep. Pit to be constructed, operated and closed in accordance with NMOCD guidelines and SGI procedures

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE [Signature] TITLE Agent for SG Interests, Ltd. DATE 7/5/2007

Type or print name William Schwab III E-mail address: tripp@nikaenergy.com Telephone No. 970-259-2701


For State Use Only

Deputy Oil & Gas Inspector,
District #3

APPROVED BY: [Signature] TITLE Deputy Oil & Gas Inspector, District #3 DATE AUG 06 2007

Conditions of Approval (if any):

SG INTERESTS I, LTD.
 FEDERAL 20-5-6 #3
 1865'FSL & 890'FWL
 Sec.6, T20N, R5W, NMPM
 McKinley Co., NM

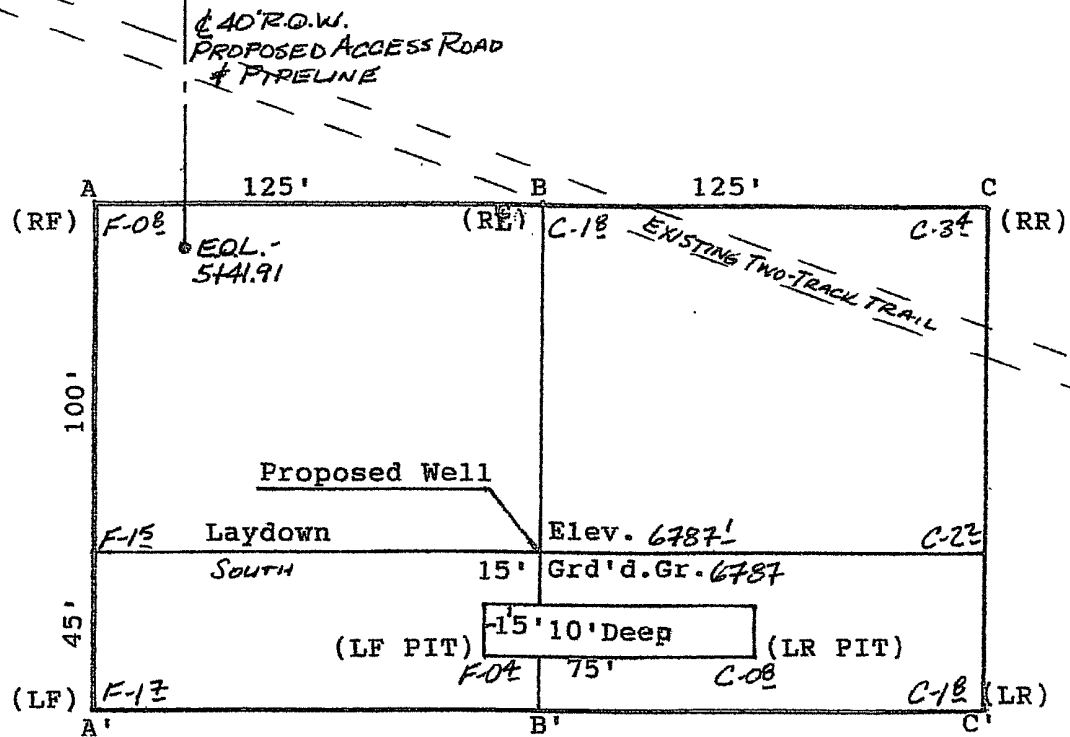

Scale: 1"=50'



A-A'	Vert.: 1"=30'	Horiz.: 1"=50'	C/L
6790			
6780			
B-B'			
6790			
6780			
C-C'			
6790			
6780			

NIKA ENERGY OPERATING, LLC
SG INTERESTS I, LTD.

WELL NAME: Federal 20-5-6#3

FIELD NAME: Basin Fruitland Coal

LOCATION: Sec 6, T20N, R5W
Lot # 6
McKinley County, New Mexico

PROPOSED TD: 1075'

DRILLING SKELETON:

<u>Interval</u>	<u>Hole Size</u>	<u>Casing Size</u>	<u>Depth</u>
Surface	12-1/4"	8-5/8"	180'
Production	7-7/8"	4-1/2"	1075'

MUD PROGRAM:

<u>Interval</u>	<u>Mud Type</u>	<u>Mud Weight</u>	<u>Funnel Viscosity</u>	<u>Water Loss</u>
0 - 180'	Native	8.5 - 9.1	30 - 50	N/C
180'-1075'	Native/LSND	8.5 - 9.1	30 - 50	8 - 10

CORE PROGRAM: None

ELECTRICAL LOGGING PROGRAM: Openhole logs will include a GR/Caliper and a Formation Density log from TD to the surface casing shoe.

Fruitland Drilling Program - Federal 20-5-6#3
Page 2

CASING AND CEMENTING PROGRAM:

<u>Interval</u>	<u>Size, Wt, Grade, Thread</u>	<u>Depth</u>	<u>Cement</u>
Surface	8-5/8", 24#, J-55, ST&C	180'	175 sx Class B. 2% CaCl, $\frac{1}{4}$ #sx celloflake
Production	4-1/2", 10.5#, J-55, ST&C	TD	433 sx Class B. $\frac{1}{4}$ #sx celloflake, 3# Gilsonite

WELLHEAD: 3000# Independent Style

BLOWOUT PREVENTION EQUIPMENT REQUIREMENTS:

<u>Description</u>	<u>Rating</u>
Double Ram Type Preventer	2000 psi
Rotating Head	2000 psi

BOPE testing will be done by third party testers in accordance with Onshore Order No. 2. The test must be performed and recorded using a test pump, calibrated test gauges and properly calibrated strip or chart recorder. The test gauges and recorders must be of the proper range and resolution commensurate with the authorized test pressure. The test must be recorded in the driller's log and will include a low pressure test requirement of 250 psig held for 5 minutes and a high pressure test requirement held for 10 minutes. Casing pressure tests must be held for 30 minutes with no more than 10 percent pressure drop during the test.

GEOLOGIC PROGNOSIS:

Elevations: GL ~ 6787'

Formation Tops:

<u>Formation</u>	<u>Depth</u>
Ojo Alamo	375'
Kirtland	475'
Fruitland	650'
Coal Top	850'
PC	875'
Total Depth	1075'

Note: TD will be 200' below the lowest coal. The company man will be on location once coals are penetrated until TD to monitor drilling breaks and to insure that 200' of rathole is drilled. When the hole is logged, if a coal zone is indicated within 150' of bottom, additional hole is to be drilled to provide 200' of rathole.

MUD PROGRAM:

A fresh water native mud (using lime, benex & gel additions) will be used to drill the surface hole. The 7-7/8" hole should be drilled with native mud and a LSND mud as necessary for hole stability just before the top of the Fruitland formation is encountered.

At the top of the Fruitland formation mud weights should be sufficient to control pressures; viscosity should be in the 30 - 50 sec range with a water loss of 8 - 10 cc, as needed.

The Fruitland Coals are expected to be under-pressured to normal-pressured and may encounter lost circulation. LCM should be stored on location and used as needed in the event of lost circulation. Barite should also be on location in the event an over-pressured zone is encountered and a kick is taken.

CASING AND CEMENTING PROCEDURE:

Note: Notify BLM 24 hours prior to spud and testing of BOP's and cementing. 505-599-8907. Note the new (June 1, 2005) Federal (BLM) requirements for the testing and test recording of the Blow-out Preventer Equipment. A copy is attached to the approved APD.

Surface Casing:

1. Drill to a minimum of 180' to accommodate tallied 8 5/8" casing plus 3'. Casing tally to be taken on location.
2. Use a landing joint of 8 5/8" casing to set casing at ground level. Guide shoe on casing should be not more than 2 feet off bottom. Casing head flange to be set at ground level.
3. Displace hole with casing volume of fresh water ahead of cement.
4. Pump Class B cement with 2% CaCl at 5-7 barrel per minute.
5. Drop top plug and displace with fresh water when preflush returns are observed at the surface. Do not over-displace.
6. If plug does not bump, hold pressure for a minimum of three hours.
 - a. Wait on cement a minimum of 8 hours or until surface samples are hard *, whichever is longer before nipping up the BOP. Pressure test casing and BOP to 1500 psig for 30 minutes. Low pressure test BOP and Casing 250# for 10 minutes.
 1. * Note: The BLM requirement is a minimum of 250 psi @ 60degrees F compressive strength before BOP may be nipped up.
 2. Notes: Use a standard 8 5/8" guide shoe, an 8 5/8" insert float, 3 centralizers and 1 stop ring. Set insert on top of first joint. Bakerlok shoe, float collar and bottom two joints of casing.

Production Casing:

1. Roll casing off truck with thread protectors in place.
2. Visually inspect, rabbit, number, and tally casing on racks. Remove thread protectors and clean threads. Use quick release protectors while running casing. Do not move or roll casing without thread protectors in place.
3. Change out pipe rams to accommodate 4-1/2" casing.
4. Bakerlok 4-1/2" float shoe to bottom of first joint of casing.
5. Bakerlok 4-1/2" differential float collar to top of first joint of casing. Bakerlok second joint of casing into top of float collar. Run "marker joint" 100' above top coal as per openhole logs.
6. Casing should be made up to proper torque (1320 ft-lb for 10.5# or 1540 ft-lb for 11.6#) using an API thread compound.
7. Casing should be run no faster than 2 feet per second (20 seconds per 40 foot joint). At the first indication of mud loss, the running time should be doubled to 40 seconds per joint (1 foot per second).
8. Break circulation at 500 feet and one joint above TD. Circulate a minimum of 15 minutes. Make sure that the hole is not flowing. Adjust mud properties as necessary. Circulate the last joint of casing to TD. Kick pumps in slowly to minimize surge pressures.
9. Turbolizing centralizers should be run on each of the first 10 joints and joint 12, 14, and 16. A stop-ring should be used to hold the first centralizer in place. Place the remaining centralizers on collars.
10. After casing is landed at TD, circulate hole until mud properties measured at the flowline are within the ranges given in the "Mud Program" of this drilling prognosis.
11. Rig up rotational cementing head and return lines. Chixson should be long enough to allow 25'-30' reciprocation.
12. Pump 10 barrels of fresh water. Pump 20 barrel chemical wash. Pump cement slurry. Wash lines.
13. Drop top plug and displace with water. Do not over-displace. Pipe should be rotated at 10-20 RPM or reciprocated at least 20 feet every two to three minutes throughout displacement.
14. Bump plug with 500 psi over final displacement pressure. Hold pressure for 5 minutes. If plug does not bump, hold initial shut down pressure on casing for 5 minutes. Then check to see that float is holding (flow back into cement pump tank).

SG Interests I, Ltd.
(Agent: Nika Energy Operating, LLC)
PO Box 2677
Durango, CO 81302
(970) 259-2701

Federal 20-5-6 #3
SW Sec 6-20N-R5W
1865' FSL & 890' FWL
McKinley County, New Mexico

EIGHT POINT DRILLING PROGRAM

1. Estimated Formation Tops:

Ojo Alamo	375'
Kirtland	475'
Fruitland	650'
Coal Top	850'
PC	875'
Total Depth	1075'

2. Estimated Depth of Anticipated Minerals:

Fruitland (Gas)	850'
-----------------	------

3. Minimum Specifications for Pressure Control Equipment:

BOP equipment and accessories will meet or exceed BLM requirements outlined in 43 CFR Part 3160.

A 2000 psig double ram hydraulic BOP will be used (see attached diagram). Accessories to the BOP will meet BLM requirements for a 2000 psig system. The accumulator system capacity will be sufficient to close all BOPE with a 50% safety factor. Fill line, kill line and line to choke manifold will be 2". BOP's will be function tested every 24 hours and will be recorded on IADC log.

Surface casing will be tested to 1500 psig for 30 minutes.

Eight Point Drilling Program - Federal 20-5-6 #3

Page 2

Accessories to BOPE will include upper and lower Kelly cocks with handles, stabbing valve to fit drill pipe on floor at all times, string float at bit, 2000 psig choke manifold with 2" adjustable and 2" positive chokes, and pressure gauge.

4. Casing and Cementing Program:

<u>Hole Size</u>	<u>Interval</u>	<u>Csg Size</u>	<u>Wt, Grd, Jt</u>
12-1/4"	0-180'	8-5/8"	24#, J-55, STC
7-7/8"	0-1075'	4-1/2"	10.5#, J-55, STC

Surface Casing will be cemented with 175 ~~cu ft~~ ^{ft³} (148 ~~cu ft~~ ^{sxs}) class B w/2% CaCl and 1/4#/sx of celloflake (Yield = 1.18 cuft/sx, Weight = 15.6 #/gal). Cement volumes include excess to circulate cement to surface. A guide shoe, insert float and three (3) centralizers will be used. WOC time is 8 hours. The casing will be pressure tested to 1500 psig.

Production Casing will be cemented with 433 ~~cu ft~~ ^{ft³} (367 ~~cu ft~~ ^{sxs}) class B w/2% CaCl and 1/4#/sx celloflake (Yield = 1.18 cuft/sx, Weight = 15.6 #/gal). Cement volume includes excess to circulate cement to surface. In the event cement is not circulated a temperature survey will be run to determine the actual cement top. Cementing equipment will include a guide shoe, float collar and 7 centralizers. Class G or H cement may be used depending on availability of Class B.

5. Mud Program:

A native water based mud system (FW) will be used initially followed by a low-solids, non-dispersed gel system (LSND) as needed to condition the hole for logs. Adequate amounts of lost circulation and weighting material will be on location if needed as well as sorbitive agents to handle potential spills of fuel or lubricants.

<u>Depth</u>	<u>Type</u>	<u>Wt (ppg)</u>	<u>Vis (sec)</u>	<u>Wtr loss</u>
0-180'	FW	± 8.5	30-33	NC
180'-TD	FW & LSND	± 8.7-9.1	30-50	8-10 cc

6. Testing, Coring and Logging Program:

No DST's or cores are planned. Openhole logs will include GR, Induction, Density and Caliper Logs. The GR-Density logs will be run from TD to the top of the Fruitland formation. GR-Induction-Caliper logs will be run from TD to the bottom of the surface casing.

7. Anticipated Abnormal Pressures and Temperatures:

No abnormal pressures or temperatures are expected in this well. Maximum anticipated Fruitland reservoir pressure is 300 psig with a normal temperature gradient.

8. Operations:

Anticipated spud date is August 2007 or as soon as permits are received and work can be scheduled. Estimated drilling time is 4 - 5 days. The Fruitland will be completed as a cased hole completion, perforated and hydraulically fracture stimulated. Completion operations are expected to take 5 - 7 days and will commence as soon after completion of drilling operations and scheduling allow.

2-M SYSTEM

