<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St Francis Dr , Santa Fe, NM 87505

### State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

8552

# Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action: \_\_\_\_\_Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

Operator:Fuller Production, IncOGRID #:151182
Facility or well name: _Atkins #1
U/L or Qtr/Qtr _B Section15 Township31N Range13W County:SAN JUAN  Center of Proposed Design: Latitude36° 54' 17.65357" N Longitude108° 11' 16.86930" W NAD:1927 \bigstyle 1983  Surface Owner: Federal State \bigstyle Private Tribal Trust or Indian Allotment  2 Pit: Subsection F or G of 19.15.17.11 NMAC  Temporary: Drilling Workover
Center of Proposed Design: Latitude36° 54' 17.65357" N Longitude108° 11' 16.86930" W NAD: ☐ 1927 ☑ 1983  Surface Owner: ☐ Federal ☐ State ☑ Private ☐ Tribal Trust or Indian Allotment  2. ☐ Pit: Subsection F or G of 19.15.17.11 NMAC  Temporary: ☐ Drilling ☐ Workover
Surface Owner:    Federal   State   Private   Tribal Trust or Indian Allotment  2.   Pit: Subsection F or G of 19.15.17.11 NMAC  Temporary:   Drilling   Workover   CENED   10.15   10
Surface Owner:
2.    Pit: Subsection F or G of 19.15.17.11 NMAC    Temporary:   Drilling   Workover     Permanent   Emergency   Cavitation   P&A
Permanent Emergency Cavitation P&A
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
Permanent   Emergency   Cavitation   P&A   Permanent   Emergency   Cavitation   P&A   Permanent   Emergency   Cavitation   P&A   Permanent   Permanent   Emergency   Cavitation   P&A   Permanent   P&A   P&A   Permanent   P&A   P&A   Permanent   P&A   P&A   Permanent   P&A   P
Liner Seams: Welded Factory Other Volume: bbl Dimensions Vo
3. CES 82128 CS
Closed-loop System: Subsection H of 19.15.17.11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
Liner Seams: Welded Factory Other Other
4.
Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume: 95bbl Type of fluid:Water
Tank Construction material:Fiberglass
Secondary containment with leak detection  Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ OtherDouble bottomed with leak
detection
Liner type: Thicknessmil
5.  Alternative Method:
Form C-144 Oil Conservation Division Page 1 of 6



Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration	on of approval.
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify3' Field Fencing with one strand of barbed wire	hospital,
7.  Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  □ Screen □ Netting □ OtherWire mesh covering on top  □ Monthly inspections (If netting or screening is not physically feasible)	
8.  Signs: Subsection C of 19.15.17.11 NMAC  □ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  □ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acce, material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approoffice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	ppriate district approval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	⊠ Yes □ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ⊠ No
Within a 100-year floodplain.	□ Ves ☑ No

Page 2 of 6

- FEMA map
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC  Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: Previously Approved Operating and Maintenance Plan API Number: AP
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Climatological Factors Assessment  Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC  Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC  Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC  Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC  Quality Control/Quality Assurance Construction and Installation Plan  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Preeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Nuisance or Hazardous Odors, including H <sub>2</sub> S, Prevention Plan  Emergency Response Plan  Oil Field Waste Stream Characterization  Monitoring and Inspection Plan  Erosion Control Plan  Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC  Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.  Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative  Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)  Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

☐ Site Reclamation Plan - based upon the appropriate requirements of Subsecti	on G of 19.15.17.13 NMAC						
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Instructions: Please indentify the facility or facilities for the disposal of liquids,	Steel Tanks or Haul-off Bins Only: (19.15.17.13.D	NMAC)					
facilities are required.							
	Disposal Facility Permit Number:						
•	Disposal Facility Permit Number:						
Will any of the proposed closed-loop system operations and associated activities of ☐ Yes (If yes, please provide the information below) ☐ No	cur on or in areas that will not be used for future serv	ice and operations?					
Required for impacted areas which will not be used for future service and operatio  Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	requirements of Subsection H of 19.15.17.13 NMAC I of 19.15.17.13 NMAC	)					
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the provided below. Requests regarding changes to certain siting criteria may requir considered an exception which must be submitted to the Santa Fe Environmenta demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC	e administrative approval from the appropriate disti Bureau office for consideration of approval. Justi	ict office or may be					
Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data	a obtained from nearby wells	<ul><li>☐ Yes ☐ No</li><li>☐ NA</li></ul>					
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells							
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image							
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site							
Within incorporated municipal boundaries or within a defined municipal fresh water adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approv	-	☐ Yes ☐ No					
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visu	al inspection (certification) of the proposed site	☐ Yes ☐ No					
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining	g and Mineral Division	☐ Yes ☐ No					
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geolog Society; Topographic map	y & Mineral Resources; USGS; NM Geological	☐ Yes ☐ No					
Within a 100-year floodplain FEMA map		☐ Yes ☐ No					
18.  On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached.  ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements or ☐ Construction/Design Plan of Burial Trench (if applicable) based upon the a ☐ Construction/Design Plan of Temporary Pit (for in-place burial of a drying propriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocols and Procedures - based upon the appropriate requirements of 19.1 ☐ Protocol	uirements of 19.15.17.10 NMAC f Subsection F of 19.15.17.13 NMAC oppropriate requirements of 19.15.17.11 NMAC ad) - based upon the appropriate requirements of 19.						

<ul> <li>☐ Confirmation Sampling Plan (if applicable) - based upon the</li> <li>☐ Waste Material Sampling Plan - based upon the appropriate</li> <li>☐ Disposal Facility Name and Permit Number (for liquids, dri</li> <li>☐ Soil Cover Design - based upon the appropriate requirement</li> <li>☐ Re-vegetation Plan - based upon the appropriate requirement</li> <li>☐ Site Reclamation Plan - based upon the appropriate requirement</li> </ul>	requirements of Subsection F of lling fluids and drill cuttings or its of Subsection H of 19.15.17.1 ts of Subsection I of 19.15.17.13	19.15.17.13 NMAC n case on-site closure standards cannot be achieved) 3 NMAC 3 NMAC
19.		
Operator Application Certification:  I hereby certify that the information submitted with this application	n is two assumpts and samplets	to the best of my knowledge and belief
		to the best of my knowledge and benef.
Name (Print): Tit	le: Vice Pres	
Signature:	Date:	3-8-11
organica.	Dute.	
e-mail address:	Telephone: <u>432 - 683 - 56</u>	<u> </u>
20.		
OCD Approval: Permit Application (including closure plan)	☐ Closure Plan (only) ☐ C	OCD Conditions (see attachment)
OCD Representative Signature:		Approval Date: 4/18//1
,		·
Title: Fnviro /spac	OCD Permit N	lumber:
Closure Report (required within 60 days of closure completion Instructions: Operators are required to obtain an approved closu The closure report is required to be submitted to the division with section of the form until an approved closure plan has been obtain	ure plan prior to implementing ain 60 days of the completion of ined and the closure activities h —	any closure activities and submitting the closure report. The closure activities. Please do not complete this
Closure Method:	d Claric	Let D West D
☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ If different from approved plan, please explain.	Alternative Closure Met	hod Waste Removal (Closed-loop systems only)
23.		
Closure Report Regarding Waste Removal Closure For Closed Instructions: Please indentify the facility or facilities for where two facilities were utilized.		
Disposal Facility Name:	Disposal Facili	ty Permit Number:
Disposal Facility Name:		ty Permit Number:
Were the closed-loop system operations and associated activities p  Yes (If yes, please demonstrate compliance to the items below	erformed on or in areas that will	
Required for impacted areas which will not be used for future serv	ice and operations:	
☐ Site Reclamation (Photo Documentation)		
☐ Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique		
24.  Closure Report Attachment Checklist: Instructions: Each of to mark in the box, that the documents are attached.  Proof of Closure Notice (surface owner and division)  Proof of Deed Notice (required for on-site closure)  Plot Plan (for on-site closures and temporary pits)  Confirmation Sampling Analytical Results (if applicable)  Waste Material Sampling Analytical Results (required for o		ched to the closure report. Please indicate, by a check
☐ Disposal Facility Name and Permit Number ☐ Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique	,	
Site Reclamation (Photo Documentation) On-site Closure Location: Latitude	Longitude	NAD: □1927 □ 1983

Operator Closure Certification:								
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.								
Name (Print):	Title:							
Signature:	Date:							
e-mail address:	Telephone:							

## NEW MEXICO OIL CONSERVATION COMMISSION

# Well Location and Acreage Dedication Plat

Secti	ion A.							Date	June 25,	1962
Opera	ator	Adeb	e 011 Co	pany _		Lease	Atkins	911		5 m s
	No	-1	Unit Le	ter	Section	n 23	Township	318	Range	NMPN
Locat		340	Fee	From	<del></del>	-riiig <b>Far</b> i	1.6	et riom	BASC	Line
Count		AND AND			. Eleyati	on 3/3		ed Acreage Basin Dako	E	<i>320</i> Acres
Name .	of Pr	oduci	ng Forma	tion			F001			, , , , , , , , , , , , , , , , , , , ,
		Opera		outh c	wner* in	the dedic	cated acreage o	utlinea on	the plat	pelow?
	Yes If the	3 D S W (	No	t. Astion	one is "r	o." have	the interests	of all the	owners he	en en
							r otherwise? Y			
			of Cons							
	If the below:		er to qu	stion	two is "r	o," list	all the owners	and their	respectiv	ve interests
			Owner				Land Des	cription		
_	<del></del>					<del></del>	<del></del>	<del></del> -	ACITE	1
-				<del> </del>		<del></del>		<del></del>	SEPETA)	
-	ion. B	Thi	s is a s	(Marie 1)	re-entry	- well be	as already been	surveyed.	VOIT CON	Cr
6C []	LOII• B		T	<u> </u>				¬ \		
			1			· ·		•	OIL D'S	<b>\.</b> "
			ì			. '			to certi:	y that the
			1			8,10			tion in S	
			] 	i			1800-			d complete / knowledge
			1 }	}			./ 8.0 -	and bel		Kilonicago
			l						Adebe 011	Company
- —					<del>                                     </del>					
			1					1	Operator)	<b>!</b>
			, I			1		5	it Ka	i
						ļ		Re	oresentar	ve)H. D. Log
			1	l			*	1223 Fe		lfe'Bldg.
			1			١		Midland	-	
				<u> </u>	<del>                                     </del>			1	Address	
			, 			!		This is	to certi	fy that the
			1			İ				own on the
			1		ļ	j		plat in	Section 1	3 was plotted
			1			İ				of actual
			!						•	ne or under
-			<del> </del>	<u> </u>	<del> </del>					nd that the correct to
			1	1						nowledge and
•				1		1		belief.	• _	-
						!		Date Su	rveyed	entry
			 			:		Registe	red Profe	sional
		· .	200	sometime in		A Security of				and Surveyor
33	0 660	990 13	20 1650 IS	880 2310	7640 2	000 1500	1000 500	<u> </u>		



# New Mexico Office of the State Engineer Water Column/Average Depth to Water

(quarters are 1=NW 2=NE 3=SW 4=SE)

28/2017/2017/2017/2017/2017/2017/2017/2017		(quarters are smallest to largest)						est)	(NAD83 UTN	(In feet)			
	Sub		Q	Q	Q			141			epth De	epth Wa	ter
POD Number	, basin Use C	ounty	64	16	4	Sec	Tws	Rng	- X	Υ.Υ.	Well W	aterColu	ımn
SJ 02048	DOM	SJ	4	2	3	15	31N	13W	215529	4088266*	54	24	30
SJ 03734 POD1	DOM	SJ	3	4	1	15	31N	13W	215352	4088663*	40	10	30
SJ 03831 POD1	DOM	SJ	1	4	1	15	31N	13W	215329	4088953	29	8	21
SJ 03852 POD1	DOM	SJ	3	2	1	15	31N	13W	215354	4088982	70		
									Aver	14 feet			
										8 feet			
	•									Maximum	Depth:	24 feet	

**Record Count: 4** 


**PLSS Search:** 


Section(s): 15

Township: 31N

Range: 13W

\*UTM location was derived from PLSS - see Help

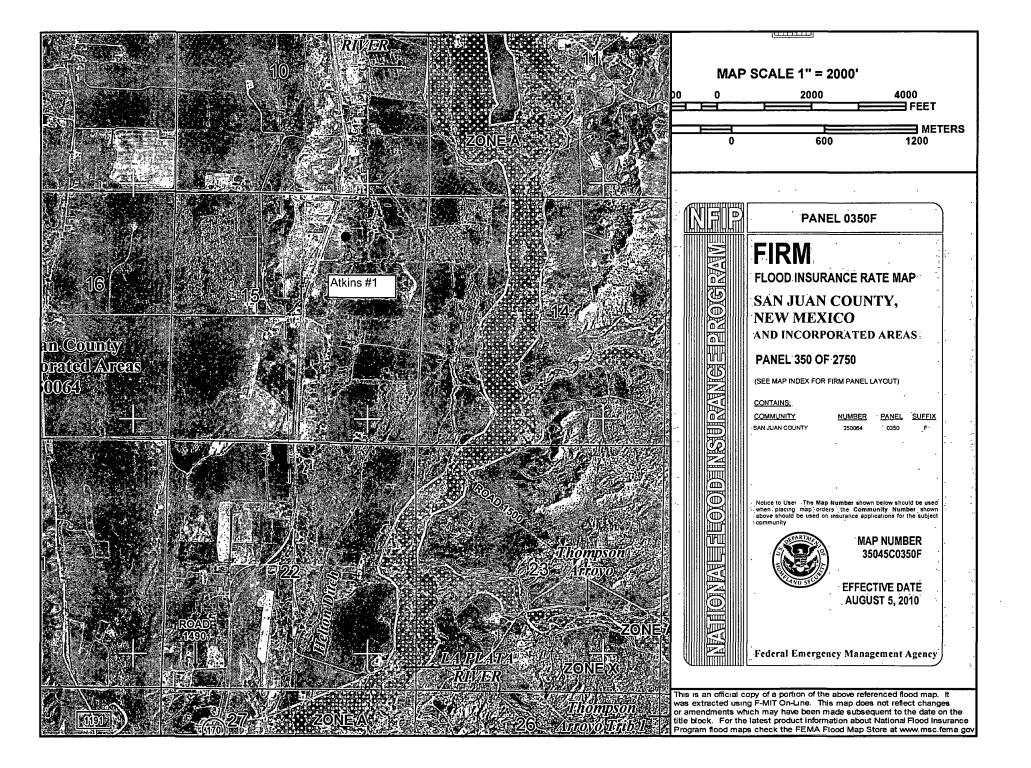

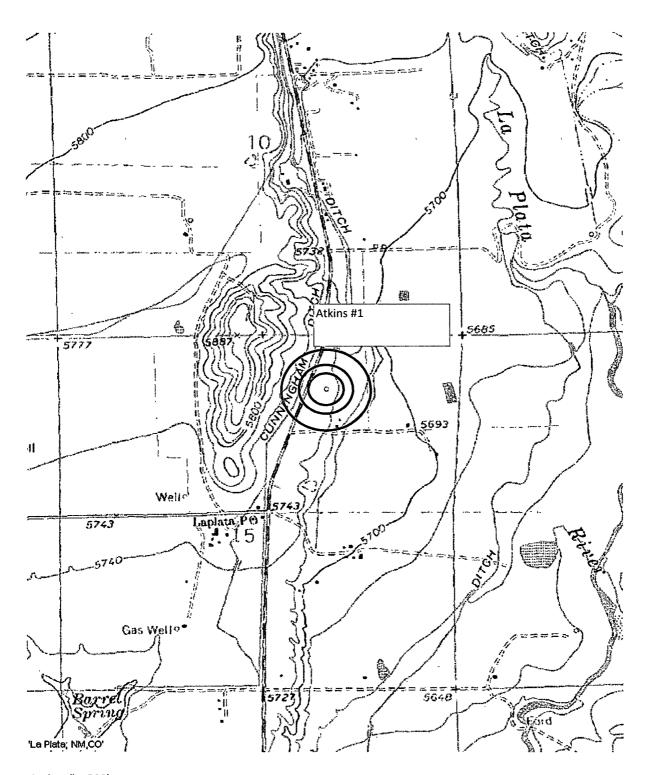


Scale: 1" = 500' Circle Radii = 200', 300', & 500'


Atkins #1 API #: 30-045-10815 Sec 15-T31N-R13W



Circle Radii 300' & 1,000'

Atkins #1 API #: 30-045-10815 Sec 15-T31N-R13W



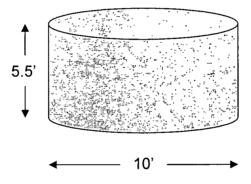

# Atkins #1

10' x 5.5' Fiberglass 95 bbl Cylindrical Tank Single Bottom without leak Detection with Wire Mesh Tank Covering 02/07/2011

### **Siting Criteria Compliance Demonstrations**

The Atkins #1 well is not located in an unstable area. The location is not over a mine and is not on the side of a hilll. The location of the excavated pit material is not within 300' of any continuously flowing watercourse or within 200' of any other water course.

# Fuller Production, Inc. San Juan Basin Below Grade Tank Design and Construction

In accordance with Rule 19.15.17 NMAC the following describes the as-built construction of the Below Grade Tank for the FULLER PRODUCTION, INC. below grade tank on the Atkins #1 well located in the NWNE, "B" of Sec 15, T31N, 13W.

#### **As-built Installation:**

- 1. The existing tank pit consists of an approximate 12 ft by 12 ft earth walled hole into which a 10 ft by by 5.5 ft, single walled, fiberglass, 80 bbl tank with leak detection is placed.
- 2. The tank walls are closed.
- 3. There is a wire meshed covering on the top of the below grade tank.
- 4. The tank pit is surrounded by a 30 ft X 30 ft X 2 ft berm that is contained within a 50 ft X 140 ft berm that encloses the tank battery to prevent overflow or surface water run-on.
- 5. A general location sign is displayed on site.
- 6. The pit tank is fenced with 3 ft field fence and one strand of barbed wire.

# Fuller Production, Inc. San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 NMAC the following describes the below grade tank operation and maintenance plan for the FULLER PETROLEUM Atkins #1 well located in the NWNE, "B" of Sec 15, T31N, 13W.

#### General Plan:

- 1. FULLER PETROLEUM shall operate and maintain the below grade tank to contain liquids and solids and prevent contamination of fresh water to protect the public health and environment.
- 2. FULLER PETROLEUM shall not allow a below grade tank to overflow or allow surface water run-on to enter the below grade tank.
- 3. FULLER PETROLEUM shall continuously remove any visible or measurable layer of oil from the fluid surface of a below grade tank in an effort to prevent significant accumulation of oil over time.
- 4. FULLER PETROLEUM shall inspect the below grade tank monthly and maintain a written record of each inspection for five years.
- 5. FULLER PETROLEUM shall maintain adequate freeboard to prevent overtopping of the below grade tank.

## Fuller Production, Inc. San Juan Basin Closure Plan

In accordance with Rule 19.15.17.1 NMAC the following procedure describes the closure plan for the FULLER PRODUCTION, INC. below grade tank on the Atkins #1 well located in the "B", NWNE of Sec 15, T31N, 13W.


#### **Closure Requirements:**


- 1. FULLER PRODUCTION, INC. shall close the below grade tank within the time periods provided in 19.15.17.13 NMAC or by an earlier date that the division requires because of imminent danger to fresh water, public health, or the environment.
- 2. FULLER PRODUCTION, INC. shall close an existing below grade tank that does not meet the requirements of Paragraph (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008 if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. FULLER PRODUCTION, INC. shall close a permitted below grade tank within 60 days of cessation of the below ground tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on C-144.
- 4. All liquids will be removed from the temporary permit prior to closure and the liquids disposed of in a division approved facility.
- 5. FULLER PRODUCTION, INC. shall remove the below grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. FULLER PRODUCTION, INC. will remove any on-site equipment associated with the below grade tank unless the equipment is required for some other purpose.
- 7. FULLER PRODUCTION, INC. shall test the soils beneath the below grade tank to determine whether a release has occurred. FULLER PRODUCTION, INC. shall collect a five point composite sample and individual grab samples from any area that is wet, discolored, or showing other evidence of a release. The samples will be analyzed for BTEX, TPH, and chlorides to demonstrate that the benzene concentration as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not

exceed 50 mg/kg; the TPH concentration as determined by EPA method 418.1 or other EPA method that the division approves does not exceed 100 mg/kg; and the chloride concentration as determined by EPA method 300.1 or other EPA method that the division approves does not exceed 250 mg/kg or the background concentration, whichever is greater. FULLER PRODUCTION, INC. shall notify the division of its results on form C-141.

- 8. If FULLER PRODUCTION, INC. or the division determines that a release has occurred, then Fuller FULLER PRODUCTION, INC. shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC as appropriate.
- 9. If contamination is confirmed by field sampling. FULLER PRODUCTION, INC. will follow the Guidelines For Remediation Of Leaks, Spills, and Releases NMOCD August 1993 when remediating identified contaminants.
- 10. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then FULLER PRODUCTION, INC. shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; re-contour, and revegetate the site.
- 11. Notice of closure will be given to the Aztec Division office between 72 hours and one week of closure via email or verbally. The notification of closure will include the following:
  - · Operator's name
  - · Location by Unit Letter, Section Township, and Range.
  - · Well name and API number
- 12. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the blow grade tank. The closure report will be filed on C-144 and incorporate the following:
  - · Details on capping and covering where applicable
  - · Inspection reports
  - · Sampling results
- 13. The site will be re-contoured to match the surrounding area. Natural drainages will be unimpeded and erosion control will be utilized where necessary.
- 14. FULLER PRODUCTION, INC. shall seed the disturbed areas the first growing season with a division approved seed mixture after pit closure. Seeding will be accomplished by drilling on the contour whenever possible or by other division approved methods. Repeat seeding or planting will be continued until successful vegetative growth occurs.

- 15. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the thickness of the topsoil native to the area, whichever is greater.
- 16. The surface owner shall be notified of FULLER PRODUCTION, INC.'s closing of the below grade tank as per the approved closure plan using certified mail with return receipt requested.



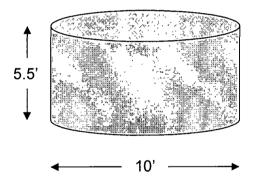

## Atkins #1

10' x 5.5' Fiberglass 95 bbl Cylindrical Tank Single Bottom without leak Detection with Wire Mesh Tank Covering 02/07/2011

### Powell, Brandon, EMNRD

From: Sent:

Scott King [sking@frenchoiltx.com] Tuesday, April 19, 2011 2:59 PM

To:

Powell, Brandon, EMNRD

Subject:

Below Grade Tanks

Brandon-

Per our telephone conversation, we would like to convert the C-144 from a permit to a closure plan only. Thank you for your time and attention in this matter.

Thanks

Scott King (432) 683-5661

This email has been scanned by the MessageLabs Email Security System. For more information please visit http://www.messagelabs.com/email