District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

1220 S. St. Francis Dr., Santa Fe, NM 87505	Santa Fe, NM 87505	to the appropriate NMOCD District Office.
12578 39-29436 <u>Proposed</u> A	Pit, Below-Grade Tank Alternative Method Permit or C	1-16-15
□ Pe □ C □ M		ed alternative method
	mit one application (Form C-144) per individua	
nvironment. Nor does approval relieve the ope	oes not relieve the operator of liability should opera rator of its responsibility to comply with any other a	tions result in pollution of surface water, ground water or the applicable governmental authority's rules, regulations or ordinances.
	ton, NM 87499 OGRID #:	
	OCD Permit Number:	
	22 Township 30N Ra	
	065 <u>N</u> Longitude <u>-107.45717 W</u>	
Surface Owner: ☑ Federal ☐ State ☐ Pri		
2.		
Pit: Subsection F, G or J of 19.15.17.	11 NMAC	Closed prior to Closure Plan Approval
Temporary: Drilling Workover		
		Low Chloride Drilling Fluid ☐ yes ☐ no
Lined Unlined Liner type: Thick	nessmil	PVC Other
☐ String-Reinforced		
Liner Seams: ☐ Welded ☐ Factory ☐ 0	Other Volume:	bbl Dimensions: Lx Wx D
☐ Visible sidewalls and liner ☐ Visible	Type of fluid:Produced Water tion	
4. Alternative Method: Submittal of an exception request is require	ed. Exceptions must be submitted to the Santa F	e Environmental Bureau office for consideration of approval.

A

Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital,

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)

☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet

institution or church)

Alternate. Please specify

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
☐ Monthly inspections (If netting or screening is not physically feasible)	
7.	
Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
Signed in compliance with 19.15.16.8 NMAC	
8.	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank:	
 □ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. □ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 	
Exception(c). Togacoo mast of data and a serial and a ser	
9.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept	table source
material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.	☐ Yes ⊠ No
- ☐ NM Office of the State Engineer - iWATERS database search; ☐ USGS; ☒ Data obtained from nearby wells	□ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	☐ Yes ☐ No
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. (Does not apply to below grade tanks)	☐ Yes ☐ No
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	
Within a 100-year floodplain. (Does not apply to below grade tanks)	☐ Yes ☐ No
- FEMA map	
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured	☐ Yes ⊠ No
from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	
	☐ Yes ☒ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole,	
or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	∐ Yes ∐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial	☐ Yes ☐ No
application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Naturations: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	NMAC 15.17.9 NMAC
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Departing and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	9.15.17.9 NMAC

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the deattached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	ocuments are
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Flag Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	uid Management Pit
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be a closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	ttached to the
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. P 19.15.17.10 NMAC for guidance.	ce material are lease refer to
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

- Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ N	0
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ N	o
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geologic Society; Topographic map 	cal Yes N	o
Within a 100-year floodplain FEMA map	☐ Yes ☐ N	0
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 1 Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirement Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standal Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	9.15.17.11 NMAC ts of 19.15.17.11 NMAC	
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge		
Name (Print): Title:		 8
Signature: Date:		_
e-mail address: Telephone:		
2000 1 2000 at 200		_
18. OCD Approval: Permit Application (including closure plan) X Closure Plan (only) X OCD Conditions (see attachm OCD Representative Signature: Approval Date:	nent) see front page	
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachmatic) OCD Representative Signature: Title: Environmental Specialst OCD Permit Number:	nent) see front page	
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachmonous Environmental Specialst OCD Representative Signature: Title: Environmental Specialst OCD Permit Number: OCD Permit Number: 19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and so The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Pleas section of the form until an approved closure plan has been obtained and the closure activities have been completed.	Feb 12, 2015 Feb 12, 2015 ubmitting the closure rejuse do not complete this	
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachmatic Environmental Specialst OCD Representative Signature: Title: Environmental Specialst OCD Permit Number: Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and sure the closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Plea	Feb 12, 2015 Feb 12, 2015 ubmitting the closure rejuse do not complete this	
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachmonous Environmental Specialst OCD Representative Signature: Title: Environmental Specialst OCD Permit Number: OCD Permit Number: 19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and so The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Pleas section of the form until an approved closure plan has been obtained and the closure activities have been completed.	Feb 12, 2015 Feb 12, 2015 when the closure resists of the complete this	port.

22. Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure require	e report is true, accurate and complete to the best of my knowledge and ements and conditions specified in the approved closure plan.
Name (Print): Kenny Davis	Title: Staff Regulatory Technician
Signature:	Date:12/2/14
e-mail address: kenny.r.davis@conocophillips.com	Telephone: <u>505-599-4045</u>

Burlington Resources Oil Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: San Juan 30-6 Unit 473S

API No.: 30-039-29436

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

- 1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

 BR Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

5. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

6. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components Tests Method		Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.1	250

8. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

If the sampling program demonstrates that a release has not occurred or that any release does not exceed the
concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted,
non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required.

ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. BR Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved

methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.



January 18, 2013

Crystal Tafoya ConocoPhillips San Juan Business Unit Office 214-05 5525 Hwy 64 Farmington, New Mexico 87401

624 E. Comanche

Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

RE: Below Grade Tank Closure Report

San Juan 30-6 #473S

Rio Arriba County, New Mexico

Dear Ms. Tafoya:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) San Juan 30-6 #473S, located in Rio Arriba County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name - San Juan 30-6 #473S

Legal Description – SW% NW%, Section 22, T30N, R6W, Rio Arriba County, New Mexico Well Latitude/Longitude – N36.80065 and W107.45714, respectively BGT Latitude/Longitude – N36.80048 and W107.45766, respectively Land Jurisdiction – Bureau of Land Management (BLM)

Figure 1. Topographic Site Location Map

Figure 2. Aerial Site Map, November 2012

1.2 NMOCD Ranking

Prior to site work, the New Mexico Oil Conservation Division (NMOCD) database was reviewed, and a C-144 form dated March 2006 for the San Juan 30-6 Unit #473S reported the depth to groundwater as greater than 100 feet below ground surface (bgs). The New Mexico Office of the State Engineer (NMOSE) database was reviewed for nearby water wells, and no registered water wells were reported to be located within 1,000 feet of the location. Additionally, Google Earth and the New Mexico Tech Petroleum Recovery Research Center online mapping tool

Crystal Tafoya San Juan 30-6 #473S BGT Closure Report January 18, 2013 Page 2 of 5

(http://ford.nmt.edu/react/project.html) were accessed to aid in the identification of downgradient surface water.

Once on site, AES personnel further assessed the ranking using topographical interpretation, Global Positioning System (GPS) elevation readings, and visual reconnaissance. AES personnel concluded that depth to groundwater at the site was greater than 100 feet bgs. An unnamed wash is located approximately 120 feet north of the location. Based on this information, the location was assessed a ranking score of 20.

1.3 BGT Closure Assessment

AES was initially contacted by Bruce Yazzie, CoP representative, on November 28, 2012, and on November 29, 2012, Deborah Watson and Kelsey Christiansen of AES met with a CoP representative at the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On November 29, 2012, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8021B;
- Total petroleum hydrocarbons as gasoline range organics (GRO) and diesel range organics (DRO) per USEPA Method 8015B;
- Chloride per USEPA Method 300.0.

2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 1.4 ppm in S-1 up to 4.2 ppm in S-2. Field TPH concentrations ranged from less than 20.0 mg/kg in S-2 and S-5 up to 180 mg/kg in S-3. The field chloride concentration in SC-1 was 60 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results San Juan 30-6 #473S BGT Closure, November 2012

	Date	Depth below	VOCs OVM Reading	Field TPH	Field Chlorides
Sample ID	Sampled	BGT (ft)	(ppm)	(mg/kg)	(mg/kg)
	Level (NMAC 19.	15.17.13E)		100	250
S-1	11/29/12	0.5	1.4	20.8	NA
S-2	11/29/12	0.5	4.2	<20.0	NA
S-3	11/29/12	0.5	2.6	180	NA
S-4	11/29/12	0.5	2.5	34.1	NA
S-5	11/29/12	0.5	3.1	<20.0	NA
SC-1	11/29/12	0.5	NA	NA	60

NA - not analyzed

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.050 mg/kg and 0.25 mg/kg, respectively. TPH concentrations as GRO and DRO were reported at less than 5.0 mg/kg and 9.8 mg/kg, respectively. The laboratory chloride concentration was less than 30 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. Laboratory analytical reports are attached.

Table 2. Soil Laboratory Analytical Results San Juan 30-6 #473S BGT Closure, November 2012

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
NMOCD Action	Level (NMAC 19.15	.17.13E)	0.2	50	1	00	250
SC-1	11/29/12	0.5	<0.050	<0.25	<5.0	<9.8	<30

3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Field TPH concentrations were below the NMOCD action level of 100 mg/kg in each sample except S-3 with 180 mg/kg. However, TPH concentrations as GRO/DRO were reported below the NMOCD threshold of 100 mg/kg with less than 15 mg/kg. Chloride concentrations in SC-1 were below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results for benzene, total BTEX, TPH, and chlorides, no further work is recommended.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

Landrea Cupps

Environmental Scientist

Sandrea R. Cupps

Crystal Tafoya San Juan 30-6 #473S BGT Closure Report January 18, 2013 Page 5 of 5


Elizabeth v MeNelly

Elizabeth McNally, P.E.

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, November 2012 AES Field Screening Report 112912 Hall Analytical Report 1211A82

 $\label{lem:conocoPhillips\SJ 30-6 \#473S\San Juan 30-6 \#473S BGT Closure Report 011813.docx$

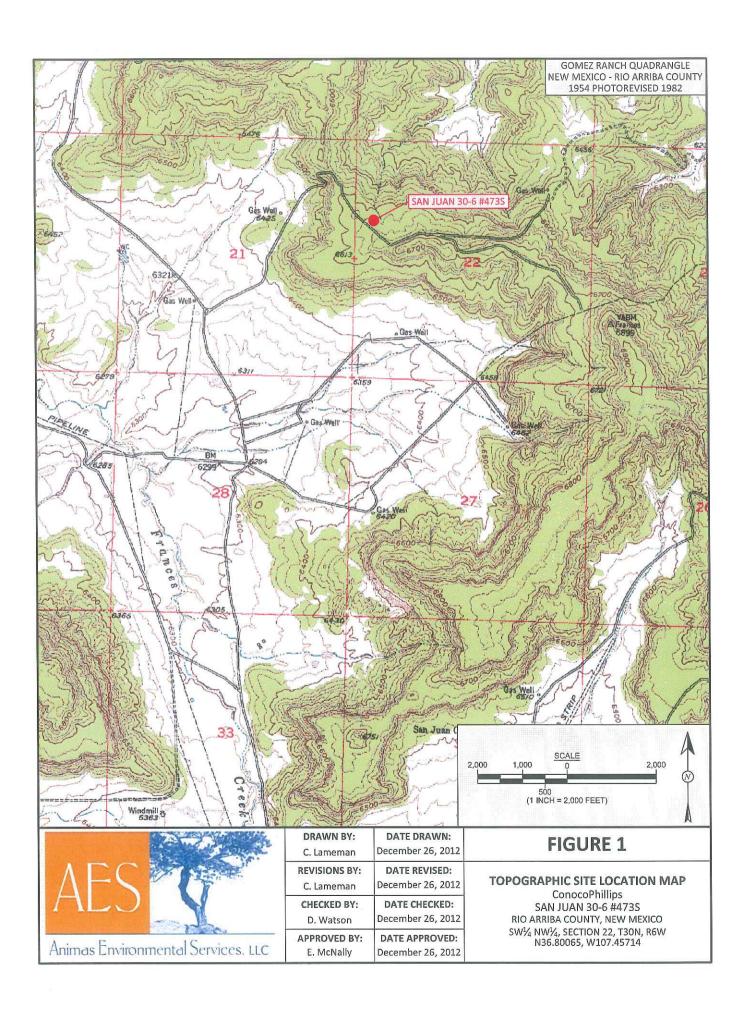




SAMPLE LOCATIONS


	Field Scr	eening R	esults	
Sample ID	Date	OVM- PID (ppm)	TPH (mg/kg)	Chlorides (mg/kg)
NMOCD AC	TION LEVEL	4-	100	250
S-1	11/29/12	1.4	20.8	NA
S-2	11/29/12	4.2	<20.0	NA
S-3	11/29/12	2.6	180	NA
S-4	11/29/12	2.5	34.1	NA
S-5	11/29/12	3.1	<20.0	NA
SC-1	11/29/12	NA	NA	60

SC-1 IS A 5-POINT COMPOSITE SAMPLE OF S-1 THROUGH S-5. NA - NOT ANALYZED

		Laborato	ry Analytico	al Results		
Sample ID	Date	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH - GRO (mg/kg)	TPH - DRO (mg/kg)	Chlorides (mg/kg)
NMOCD ACT	TON LEVEL	0.2	50	10	00	250
SC-1	11/29/12	<0.050	<0.25	<5.0	<9.8	<30

SAN JUAN 30-6 #473S MONUMENT





AERIAL SOURCE: © 2012 MICROSOFT CORPORATION - AVAILABLE EXCLUSIVELY BY DIGITALGLO

					1
ΛF	C	1	14	AF.	
HL	رر		V		
			1		

T	DRAWN BY:	DATE DRAWN:
	C. Lameman	December 26, 2012
ĺ	REVISIONS BY:	DATE REVISED:
	C. Lameman	December 26, 2012
ľ	CHECKED BY:	DATE CHECKED:
	D. Watson	December 26, 2012
Ī	APPROVED BY:	DATE APPROVED:
	E. McNally	December 26, 2012

AERIAL SITE MAP BELOW GRADE TANK CLOSURE NOVEMBER 2012

FIGURE 2

ConocoPhillips SAN JUAN 30-6 #473S RIO ARRIBA COUNTY, NEW MEXICO SW½ NW½, SECTION 22, T30N, R6W N36.80065, W107.45714

AES Field Screening Report

Client: ConocoPhillips

Project Location: San Juan 30-6 #473S

Date: 11/29/2012

Matrix: Soil



Animas Environmental Services, LLC www.animasenvironmental.com Durango, Colorado 970-403-3274

624 E. Comanche Farmington, NM 87401 505-564-2281

		Time of			Field	Field TPH				ТРН
	Collection	Sample	Sample	OVM	Chloride	Analysis	Field TPH*	TPH PQL		Analysts
Sample ID	Date	Collection	Location	(mdd)	(mg/kg)	Time	(mg/kg)	(mg/kg)	DF	Initials
S-1	S-1 11/29/2012	14:50	North	1.4	NA	20:01	20.8	20.0	П	DAW
S-2	11/29/2012	14:53	South	4.2	NA	20:04	<20.0	20.0	\vdash	DAW
S-3	11/29/2012	14:55	East	2.6	NA	20:06	180	20.0	Т	DAW
S-4	11/29/2012	14:56	West	2.5	NA	20:08	34.1	20.0	T	DAW
S-5	11/29/2012	14:58	Center	3.1	NA	20:11	<20.0	20.0	П	DAW
SC-1	SC-1 11/29/2012	15:00	Composite	NA	09		Not	Not Analyzed for TPH.	ЭH.	

Practical Quantitation Limit PQL

Not Detected at the Reporting Limit N

Not Analyzed Ϋ́

Dilution Factor

*Field TPH concentrations recorded may be below PQL.

Total Petroleum Hydrocarbons - USEPA 418.1 Analyst: Silver Nitrate

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with



Hall Environmental Analysis Laboratory
4901 Hawkins NE
Albuquerque, NM 87109
TEL: 505-345-3975 FAX: 505-345-4107
Website: www.hallenvironmental.com

December 05, 2012

Debbie Watson

Animas Environmental Services 624 East Comanche Farmington, NM 87401

TEL: (505) 486-4071

FAX

RE: CoP San Juan 30-6 #473S

OrderNo.: 1211A82

Dear Debbie Watson:

Hall Environmental Analysis Laboratory received 1 sample(s) on 11/30/2012 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. All samples are reported as received unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

John Caldwell

Supervisor

4901 Hawkins NE

Albuquerque, NM 87109

ahn Collwell

Analytical Report Lab Order 1211A82

Date Reported: 12/5/2012

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental Services

Project: CoP San Juan 30-6 #473S

Lab ID: 1211A82-001

Client Sample ID: SC-1

Collection Date: 11/29/2012 3:00:00 PM

Received Date: 11/30/2012 9:45:00 AM Matrix: MEOH (SOIL)

Analyses	Result	RL Qu	ual Units	DF	Date Analyzed
EPA METHOD 8015B: DIESEL RAN	GE ORGANICS				Analyst: MMD
Diesel Range Organics (DRO)	ND	9.8	mg/Kg	1	11/30/2012 12:01:03 PM
Surr: DNOP	102	77.6-140	%REC	1	11/30/2012 12:01:03 PM
EPA METHOD 8015B: GASOLINE R	ANGE				Analyst: NSB
Gasoline Range Organics (GRO)	ND	5.0	mg/Kg	1	11/30/2012 1:23:06 PM
Surr: BFB	97.2	84-116	%REC	1	11/30/2012 1:23:06 PM
EPA METHOD 8021B: VOLATILES					Analyst: NSB
Benzene	ND	0.050	mg/Kg	1	11/30/2012 1:23:06 PM
Toluene	ND	0.050	mg/Kg	1	11/30/2012 1:23:06 PM
Ethylbenzene	ND	0.050	mg/Kg	1	11/30/2012 1:23:06 PM
Xylenes, Total	ND	0.10	mg/Kg	1	11/30/2012 1:23:06 PM
Surr: 4-Bromofluorobenzene	107	80-120	%REC	1	11/30/2012 1:23:06 PM
EPA METHOD 300.0: ANIONS					Analyst: JRR
Chloride	ND	30	mg/Kg	20	11/30/2012 12:26:09 PM

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range E
- Analyte detected below quantitation limits
- Sample pH greater than 2
- RL Reporting Detection Limit

- Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- RPD outside accepted recovery limits R
- Spike Recovery outside accepted recovery limits Page 1 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#:

1211A82

05-Dec-12

Qual

Client:

Animas Environmental Services

Project:

CoP San Juan 30-6 #473S

Sample ID MB-5048

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID:

PBS

Batch ID: 5048

RunNo: 7229

Prep Date: 11/30/2012

Analysis Date: 11/30/2012

SeqNo: 209559

SPK value SPK Ref Val %REC LowLimit

Units: mg/Kg

%RPD

HighLimit

Analyte Chloride

Result PQL ND 1.5

Sample ID LCS-5048

SampType: LCS

TestCode: EPA Method 300.0: Anions

Client ID: LCSS

Batch ID: 5048

RunNo: 7229

%REC

LowLimit

LowLimit

64.4

Analyte

Prep Date: 11/30/2012

Analysis Date: 11/30/2012

PQL

1.5

SeqNo: 209560

Units: mg/Kg

RPDLimit

HighLimit

RPDLimit Qual

Chloride

Sample ID 1211A82-001BMS

SampType: MS

Result

14

TestCode: EPA Method 300.0: Anions

95 9

Batch ID: 5048

15.00

15.00

15.00

SPK value SPK Ref Val.

RunNo: 7229

124

Prep Date: 11/30/2012

Analysis Date: 11/30/2012

SeqNo: 209562

Units: mg/Kg

Analyte Chloride

Result PQL SPK value SPK Ref Val

PQL

30

30

%REC

HighLimit 117

RPDLimit

Qual S

Sample ID 1211A82-001BMSD

Client ID: SC-1

SampType: MSD

TestCode: EPA Method 300.0: Anions

Client ID: SC-1 Prep Date: 11/30/2012 Batch ID: 5048

Result

ND

ND

RunNo: 7229 SeqNo: 209563

124

Units: mg/Kg

117

Qual

Analyte

Chloride

Analysis Date: 11/30/2012

%REC SPK value SPK Ref Val 0

0

LowLimit 64.4

HighLimit

%RPD 0

%RPD

RPDLimit

20 S

Qualifiers:

Value exceeds Maximum Contaminant Level.

E Value above quantitation range

Analyte detected below quantitation limits

Sample pH greater than 2

В Analyte detected in the associated Method Blank

Holding times for preparation or analysis exceeded H

Not Detected at the Reporting Limit

RPD outside accepted recovery limits

Page 2 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#:

1211A82

05-Dec-12

Client: Project:		nvironmen Tuan 30-6 ‡		vices							
		0				0 1 ==	A BH 41 - 0	00450 0		•	
Sample ID		SampTy						8015B: Diese	Range C	rganics	
	PBS		ID: 504			unNo: 72		120 20 20			
Prep Date:	11/30/2012	Analysis Da	ate: 11	/30/2012	S	eqNo: 20	09012	Units: mg/Ko	9		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range C Surr: DNOP	rganics (DRO)	ND 11	10	10.00		107	77.6	140			
Sample ID	LCS-5043	SampT	ype: LC	S	Tes	Code: El	PA Method	8015B: Diese	I Range C	Organics	
Client ID:	LCSS	Batch	ID: 504	43	F	RunNo: 7	210				
Prep Date:	11/30/2012	Analysis Da	ate: 11	/30/2012	8	SeqNo: 20	09013	Units: mg/K	9		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range C	rganics (DRO)	45	10	50.00	0	89.7	47.4	122			
Surr: DNOP		4.8		5.000		96.9	77.6	140			
Sample ID	1211A74-001AMS	SampT	ype: MS	3	Tes	tCode: El	PA Method	8015B: Diese	I Range C	Organics	
Client ID:	BatchQC	Batch	ID: 50	43	F	RunNo: 7	233				
Prep Date:	11/30/2012	Analysis D	ate: 12	2/3/2012	5	SeqNo: 2	09787	Units: mg/K	g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range C	rganics (DRO)	43	10	50.56	0	84.7	12.6	148	COMPANY NO.	200 Tools (200 A)	300000000000000000000000000000000000000
Surr: DNOP	W 50 A	3.1		5.056		60.8	77.6	140			S
Sample ID	1211A74-001AMS	D SampT	ype: MS	SD	Tes	tCode: El	PA Method	8015B: Diese	I Range (Organics	
Client ID:	BatchQC	Batch	ID: 50	43	F	RunNo: 7	233				
Prep Date:	11/30/2012	Analysis D	ate: 12	2/3/2012	5	SeqNo: 2	09788	Units: mg/K	g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range (Organics (DRO)	39	9.9	49.36	0	79.9	12.6	148	8.22	22.5	4.00
Surr: DNOP		2.7		4.936		53.7	77.6	140	0	0	S
Sample ID	MB-5065	SampT	ype: MI	BLK	Tes	tCode: E	PA Method	8015B: Diese	I Range (Organics	
Client ID:	PBS		ID: 50			RunNo: 7		annes ann an Aire ann an A			
Prep Date:	12/3/2012	Analysis D				SeqNo: 2		Units: %RE0	0		
Analyte		Result			SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Surr: DNOP	311	8.3		10.00	STATION VOI	83.3	77.6	140	,,,,,,,	. s. — Lanne	- Mary
	I CC EDGE	CampT	vno: Le		Too	tCodo: E	DA Mathad	8015B: Diese	I Dance (Organics	
Sample ID Client ID:	LCSS		ype: LC n ID: 50			RunNo: 7		OU IOD. DIESE	n nange (Jigames	
Prep Date:	12/3/2012	Analysis D				SeqNo: 2		Units: %RE	C:		
2000 2010 00000000	1210/2012					2.50				DDDI imit	Ougl
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual

Qualifiers:

Surr: DNOP

* Value exceeds Maximum Contaminant Level.

4.1

5.000

E Value above quantitation range

J Analyte detected below quantitation limits

P Sample pH greater than 2

B Analyte detected in the associated Method Blank

77.6

140

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

81.2

R RPD outside accepted recovery limits

Page 3 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#:

1211A82

05-Dec-12

Client:

Animas Environmental Services

Project:

CoP San Juan 30-6 #473S

Compl	尼斯斯里	DD
Sampl	JIVIL	KD

SampType: MBLK

TestCode: EPA Method 8015B: Gasoline Range

Client ID:

PBS

Batch ID: R7211

RunNo: 7211

Prep Date:

Surr: BFB

Analysis Date: 11/30/2012

SeqNo: 209495

Analyte

Result PQL SPK value SPK Ref Val %REC LowLimit

Units: mg/Kg HighLimit

%RPD

Gasoline Range Organics (GRO)

ND 960

1000

689.6

17.24

689.6

SPK value SPK Ref Val

95.5

116

Qual

Sample ID 2.5UG GRO LCS

SampType: LCS Batch ID: R7211

5.0

TestCode: EPA Method 8015B: Gasoline Range

Client ID: LCSS Prep Date:

RunNo: 7211

Analysis Date: 11/30/2012

SegNo: 209496

Units: mg/Kg

Analyte

%REC

HighLimit LowLimit 74

84

84

%RPD **RPDLimit**

RPDLimit

Qual

Gasoline Range Organics (GRO) Surr: BFB

1000

SPK value SPK Ref Val Result POL 25 5.0 25.00 1000

98.1 102 117 116

Sample ID 1211A82-001AMS

Sample ID 1211A82-001AMSD

Gasoline Range Organics (GRO)

SampType: MS

TestCode: EPA Method 8015B: Gasoline Range

%RPD

Client ID:

Batch ID: R7211

RunNo: 7211

Units: mg/Kg

Prep Date:

Analysis Date: 11/30/2012

SeqNo: 209513

Analyte

PQL SPK value SPK Ref Val Result 16 5.0 17.24

%REC LowLimit 93.3 98.0

HighLimit 130

116

RPDLimit Qual

Gasoline Range Organics (GRO) Surr: BFB

680

Result

16

690

SampType: MSD

TestCode: EPA Method 8015B: Gasoline Range

70

84

LowLimit

70

84

Client ID: SC-1 Prep Date:

Surr: BFB

Batch ID: R7211

5.0

RunNo: 7211

%REC

90.9

99.5

Units: mg/Kg

130

116

Analyte

Analysis Date: 11/30/2012 PQL

SeqNo: 209523

0

HighLimit

%RPD

2.56

0

RPDLimit Qual 22.1

0

Qualifiers:

Value exceeds Maximum Contaminant Level.

E Value above quantitation range

Analyte detected below quantitation limits

В Analyte detected in the associated Method Blank

H Holding times for preparation or analysis exceeded

RPD outside accepted recovery limits

ND Not Detected at the Reporting Limit Page 4 of 5

Sample pH greater than 2

Hall Environmental Analysis Laboratory, Inc.

WO#:

1211A82

05-Dec-12

Cli	en	t:

Animas Environmental Services

Project:

CoP San Juan 30-6 #473S

Sample ID 5ML RB	SampT	ype: ME	BLK	TestCode: EPA Method 8021B: Volatiles						
Client ID: PBS	Batch	ID: R7	211	F	RunNo: 7	211				
Prep Date:	Analysis D	ate: 11	/30/2012	S	SeqNo: 2	09540	Units: mg/K	g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050								
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 4-Bromofluorobenzene	1.1		1.000		105	80	120			

Sample ID 100NG BTEX L	CS Samp1	Гуре: LC	S	Tes	TestCode: EPA Method 8021B: Volatiles						
Client ID: LCSS	Batc	h ID: R7	211	F	RunNo: 7	211					
Prep Date:	Analysis [Date: 11	1/30/2012	8	SeqNo: 2	09541	Units: mg/k	(g			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Benzene	0.97	0.050	1.000	0	97.2	76.3	117				
Toluene	0.99	0.050	1.000	0	99.1	80	120				
Ethylbenzene	0.99	0.050	1.000	0	99.2	77	116				
Xylenes, Total	3.0	0.10	3.000	0	99.5	76.7	117				
Surr: 4-Bromofluorobenzene	1.1		1.000		111	80	120				

Sample ID 1211A80-001AN	IS Samp	Type: MS	3	TestCode: EPA Method 8021B: Volatiles						
Client ID: BatchQC	Bato	h ID: R7	211	F	RunNo: 7	211				
Prep Date:	Analysis I	Date: 1	1/30/2012	S	SeqNo: 2	09543	Units: mg/k	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.77	0.050	0.8022	0	96.2	67.2	113			
Toluene	0.77	0.050	0.8022	0	96.4	62.1	116			
Ethylbenzene	0.78	0.050	0.8022	0	97.3	67.9	127			
Xylenes, Total	2.3	0.10	2.407	0	97.6	60.6	134			
Surr: 4-Bromofluorobenzene	0.85		0.8022		106	80	120			

Sample ID 1211A80-001AMSD SampType: MSD				Tes	TestCode: EPA Method 8021B: Volatiles					
Client ID: BatchQC	Batch	ID: R7	211	F	RunNo: 7	211				
Prep Date:	Analysis D	ate: 11	/30/2012	S	SeqNo: 2	09544	Units: mg/K	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.80	0.050	0.8022	0	99.6	67.2	113	3.54	14.3	
Toluene	0.80	0.050	0.8022	0	100	62.1	116	3.84	15.9	
Ethylbenzene	0.80	0.050	0.8022	0	100	67.9	127	3.01	14.4	
Xylenes, Total	2.4	0.10	2.407	0	102	60.6	134	4.22	12.6	
Surr: 4-Bromofluorobenzene	0.90		0.8022		112	80	120	0	0	

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
 - R RPD outside accepted recovery limits

Page 5 of 5



LIGHT ARTH CHINERIUS FIRMINAL LAUGH MICH

4901 Hawkins NE Albuquerque, NM 87105

Sample Log-In Check List TEL: 505-345-3975 FAX: 505-345-410;

Website: www.hallenvironmental.com Animas Environmental Work Order Number: 1211A82 Client Name: Received by/date: Logged By: Michelle Garcia 11/30/2012 9:45:00 AM Completed By: Michelle Garcia 11/30/2012 10:04:31 AM Reviewed By: Chain of Custody Yes No D Not Present 1. Were seals intact? Yes ₩ No □ Not Present 2. Is Chain of Custody complete? 3. How was the sample delivered? Courier Log In Yes 🗹 No 🗌 NA 4. Coolers are present? (see 19. for cooler specific information) Yes No 🗆 NA 🗆 5. Was an attempt made to cool the samples? Yes V No NA [6. Were all samples received at a temperature of >0° C to 6.0°C Yes V No 7. Sample(s) in proper container(s)? Yes V No 8. Sufficient sample volume for indicated test(s)? Yes M No 9 Are samples (except VOA and ONG) properly preserved? Yes ☐ No ☑ NA 10. Was preservative added to bottles? Yes No No VOA Viais 🗹 11 VOA vials have zero headspace? Yes No V 12. Were any sample containers received broken? # of preserved 13. Does paperwork match bottle labels? Yes V No bottles checked (Note discrepancies on chain of custody) for pH: Yes V No (<2 or >12 unless noted) 14. Are matrices correctly identified on Chain of Custody? Yes V No Adjusted? 15. Is it clear what analyses were requested? Yes V No 16. Were all holding times able to be met? (If no, notify customer for authorization.) Checked by: Special Handling (if applicable) 17. Was client notified of all discrepancies with this order? Yes No NA V Person Notified: Date: By Whom: Via: eMail Phone Fax In Person Regarding: Client Instructions: 18. Additional remarks: 19 Cooler Information Seal Intact | Seal No Cooler No Temp °C Condition Seal Date Signed By

3.3

Good

FNVIRONMENTAL YSIS LABORATORY environmental.com Albuquerque, NM 87109 Fax 505-345-4107 nalysis Request	Anions (F,CI,NO ₃ ,NO ₂ ,PO ₄ ,SO ₄) 8081 Pesticides / 8082 PCB's 8260B (VOA) 8270 (Semi-VOA) 280.0 (Muni-VOA)	3
ANALYSIS LABC ANALYSIS LABC www.hallenvironmental.com 4901 Hawkins NE - Albuquerque, NM 8 Tel. 505-345-3975 Fax 505-345-41	TEX + MTBE + TPH (Gas only) (Gas only) (Gas only) (Gas only) (Gas Diesel) (Gas Diesel) (TPH Method 8015B (Gas Diesel) (TPH Method 504.1) (PNA or PAH) (CRA 8 Metals	Remarks: But to Conceptiblips July 30-6 #4735 Upoli 18 Oct. Col.: C200 political 18 Remarks: 8 Remarks: 8 Remarks: 10340827
Trum-Around Time: \Box Standard \forall Rush Sawe day Project Name: C_0P Sav. Juan $30-6$ #473 S Project #:	# 2 A # "#	Time: Relinquished by: Received by: Time: Relinquished by: Received by: Time: Relinquished by: Received by:
Idiwas Environmental Services LLC Adress: 624 & Powarche Indon N.M. 87401	D Other Sample Request ID	1500 Soil SC-1 Time: Relinquished by: Time: Relinquished by:
Client: Ah Iwa Mailing Address:	email or Fax#: OA/QC Package: Standard Accreditation I NELAP Date Time	11-24-12 1500 Date: Time: Date: Time:

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III
1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Submit 1 Copy to appropriate District Office to accordance with 19.15.29 NMAC.

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Release Notificatio	n and Correc	ctive Action	1		
	OPERATOR		X Initial	Report 🛭	Final Report
Name of Company Burlington Resources Oil & Gas Company	Contact Crystal				
Address 3401 East 30 th St, Farmington, NM	Telephone No.(50				
Facility Name: San Juan 30-6 Unit 473S	Facility Type: Ga	s Well			
Surface Owner BLM Mineral Owner	BLM (SF-080713-	-A)	API No.	30-039-29436)
	N OF RELEAS			7000	
Unit Letter Section Township Range Feet from the North	h/South Line Feet North		West Line West	County Rio Arriba	
Latitude <u>36.8000</u>	65 Longitude <u>107</u>	.45717			
NATURE	E OF RELEAS	E			
Type of Release Produced Fluids	Volume of Release		Volume R	ecovered	
Source of Release Below Grade Tank	Date and Hour of	Occurrence	Date and I	Hour of Discove	ery
Was Immediate Notice Given? ☐ Yes ☐ No ☒ Not Required	If YES, To Whor	n?			
By Whom?	Date and Hour				
Was a Watercourse Reached? ☐ Yes ☐ No	If YES, Volume	Impacting the Wat	tercourse.		
If a Watercourse was Impacted, Describe Fully.*				01 1 1	
		Constituents			
		by 19.15.17			
Describe Cause of Problem and Remedial Action Taken.*		-separate C-	141 unde	r 19.15.29 r	VIVIAC
Below Grade Tank Closure Activities					-
Describe Area Affected and Cleanup Action Taken.*					
The regulatory standard for closure at this site was determined to b					
analytical results for TPH, BTEX and Chlorides were below the reg			10CD Guid	elines for Rem	ediation of
Leaks, Spills and Release; therefore no further action is required. T	ne iinai report is att	acned.			
I hereby certify that the information given above is true and complete to	the best of my know	ledge and underst	and that nurs	uant to NMOC	D rules and
regulations all operators are required to report and/or file certain release	notifications and per	form corrective ac	tions for rele	ases which may	y endanger
public health or the environment. The acceptance of a C-141 report by					
should their operations have failed to adequately investigate and remedi or the environment. In addition, NMOCD acceptance of a C-141 report					
federal, state, or local laws and/or regulations.			720	<u> </u>	
	<u>O</u>	IL CONSER	VATION	DIVISION	
Cystal of Tajoya					
Signature:	Approved by Envir	onmental Speciali	st:		
Printed Name: Crystal Tafoya	**	-			
Title: Field Environmental Specialist	Approval Date:		Expiration l	Date:	
E-mail Address: crystal.tafoya@conocophillips.com	Conditions of Appr	roval:		Attach-3	٦
Date: 1/22/2013 Phone: (505) 326-9837				Attached _	_
FIGURE, 1722/2013 FIGURE, 13031320-7637	I			I.	

^{*} Attach Additional Sheets If Necessary

