District I
1625 N. Fren. sh Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Tit, Delow-Grade Talik, Or	OCD Received				
45-27595 Proposed Alternative Method Permit or Closure Plan Application 1	-16-15				
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, below or proposed alternative method	v-grade tank,				
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative re					
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, genvironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules,	ground water or the regulations or ordinances.				
Operator: Burlington Resources OGRID #: 14538					
Address: PO BOX 4289, Farmington, NM 87499					
Facility or well name: San Juan 32-9 Unit 201					
API Number: 3004527595 OCD Permit Number:					
U/L or Qtr/Qtr H (SENE) Section 2 Township 31N Range 9W County: San Juan					
Center of Proposed Design: Latitude <u>36.92764000</u> <u>°N</u> Longitude <u>-107.743270000</u> <u>°W</u> NAD: ⊠1927 □ 1983					
Surface Owner: ☐ Federal ☑ State ☐ Private ☐ Tribal Trust or Indian Allotment OCD NAD83 36.927643 107.74887					
Pit: Subsection F, G or J of 19.15.17.11 NMAC Closure done prior to Closure P Approval. Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other	yes no				
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x	Wx D				
Constituents Exceed Standards outline by 19.15.17.13 NMAC. Please submit a separate C-141 under 19.15.29 NMAC					
4.					
Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for considerations.	sideration of approval.				
s. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, s institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet	school, hospital,				

5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)					
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	hospital,				
Four foot height, four strands of barbed wire evenly spaced between one and four feet					
Alternate. Please specify					
6. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)					
Screen Netting Other					
☐ Monthly inspections (If netting or screening is not physically feasible)					
7.					
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers					
Signed in compliance with 19.15.16.8 NMAC					
8.					
<u>Variances and Exceptions</u> : Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.					
Please check a box if one or more of the following is requested, if not leave blank:					
 □ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. □ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 					
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source					
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.					
General siting					
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; ☑ Data obtained from nearby wells	☐ Yes ☒ No ☐ NA				
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	☐ Yes ☐ No				
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality					
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No				
Within an unstable area. (Does not apply to below grade tanks)	☐ Yes ☐ No				
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 					
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No				
Below Grade Tanks					
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured	☐ Yes ☒ No				
from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site					
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;.	☐ Yes ⊠ No				
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site					
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)					
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				

Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial	☐ Yes ☐ No				
application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image					
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Temporary Pit Non-low chloride drilling fluid					
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No				
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Permanent Pit or Multi-Well Fluid Management Pit					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No				
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.					
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site					
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site					
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Naturations: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC					
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.					
and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:					
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached.	cuments are				
 □ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC □ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC □ A List of wells with approved application for permit to drill associated with the pit. □ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC 	.15.17.9 NMAC				
Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC					
Previously Approved Design (attach copy of design) API Number: or Permit Number:					

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the a	logramenta ana				
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
13. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Flaternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	uid Management Pit				
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC					
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. Please refer to 19.15.17.10 NMAC for guidance.					
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA				
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No				
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells \[\sum_{NA} \] \[\text{NA} \]					
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No				
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No				
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	2-32				

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No				
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No				
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No				
Within a 100-year floodplain FEMA map	Yes No				
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure play a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC	lan. Please indicate,				
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17 Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19 Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC					
 □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) □ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 					
17. Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and be	lief.				
Name (Print): Title:					
Signature: Date:					
Signature: Date: e-mail address: Telephone:					
e-mail address:	ee Front Page				
e-mail address: Telephone:	ee Front Page				
e-mail address:	ee Front Page				
e-mail address: Telephone:	ee Front Page 15 15 15 15 15 15 15 15 16 17 18 18 19 19 10 10 10 10 10 10 10 10				
e-mail address: Telephone:	ee Front Page 15 15 15 15 15 15 15 15 16 17 18 18 19 19 10 10 10 10 10 10 10 10				
e-mail address: Telephone:	ee Front Page 15 15 16 17 18 18 19 19 10 10 10 10 10 10 10 10				
e-mail address: Telephone:	ee Front Page 15 15 16 g the closure report. 17 of complete this				
e-mail address: Telephone:	ee Front Page 15 15 16 g the closure report. 17 of complete this				

22.	
Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure requires	
Name (Print): Kenny Davis	Title: Staff Regulatory Technician
Signature	Date: 12/5/14
e-mail address: kenny.r.davis@conocophillips.com	Telephone: 505-599-4045

Burlington Resources Oil Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: San Juan 32-9 Unit 201

API No.: 3004527595

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

- 1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit #NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

4. BR Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

5. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

6. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.



7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/kg)	
Benzene	EPA SW-846 8021B or 8260B	0.2	
BTEX	EPA SW-846 8021B or 8260B	50	
TPH	EPA SW-846 418.1	100	
Chlorides	EPA 300.1	250	

8. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

If the sampling program demonstrates that a release has not occurred or that any release does not exceed the
concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted,
non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the
site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required.

ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. BR Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved

methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.



November 25, 2013

Crystal Tafoya ConocoPhillips San Juan Business Unit Office 214-05 5525 Hwy 64 Farmington, New Mexico 87401 www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

Via electronic mail to: SJBUE-Team@ConocoPhillips.com

RE:

Below Grade Tank Closure Report

San Juan 32-9 #201

San Juan County, New Mexico

Dear Ms. Tafoya:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) San Juan 32-9 #201, located in San Juan County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name – San Juan 32-9 #201
Legal Description – SE¼ NE¼, Section 2, T31N, R9W, San Juan County, New Mexico
Well Latitude/Longitude – N36.92808 and W107.74379, respectively
BGT Latitude/Longitude – N36.92829 and W107.74387, respectively
Land Jurisdiction – State of New Mexico
Figure 1. Topographic Site Location Map
Figure 2. Aerial Site Map, October 2013

1.2 NMOCD Ranking

In accordance with the New Mexico Oil Conservation Division (NMOCD) *Guidelines for Remediation of Leaks, Spills, and Releases* (August 1993), the location was given a ranking score of 10 based on the following factors:

- Depth to Groundwater: A Cathodic Well Report dated December 1990 reported moisture at 60 and 140 feet below ground surface (bgs), but no water sample. (0 points)
- Wellhead Protection Area: The tank location is not within a wellhead protection area. (0 points)
- Distance to Surface Water Body: The wash in Rawhide Canyon is located approximately 730 feet west of the location. (10 points)

1.3 BGT Closure Assessment

AES was initially contacted by Jess Henson, CoP representative, on October 24, 2013, and on October 25, 2013, Jesse Christopherson of AES mobilized to the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On October 25, 2013, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for VOCs and chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8021B;
- TPH for gasoline range organics (GRO) and diesel range organics (DRO) per USEPA Method 8015D; and
- Chloride per USEPA Method 300.0.

2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 0.7 ppm in S-2 and S-4 up to 1.1 ppm in S-1. Field TPH concentrations ranged from 49.8 mg/kg in S-3 up to 2,290 mg/kg in S-5. The field chloride concentration in SC-1 was 60 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results

Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
NMOCD Action I	evel (NMAC 19.	15.17.13E)		100	250
S-1	10/25/13	0.5	1.1	153	NA
S-2	10/25/13	0.5	0.7	909	NA
S-3	10/25/13	0.5	1.0	49.8	NA
S-4	10/25/13	0.5	0.7	714	NA
S-5	10/25/13	0.5	0.8	2,290	NA
SC-1	10/25/13	0.5	0.9	NA	60

NA - Not Analyzed

Crystal Tafoya San Juan 32-9 #201 BGT Closure Report November 25, 2013 Page 4 of 5

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.050 mg/kg and 0.25 mg/kg, respectively. TPH concentrations as GRO and DRO were reported at less than 5.0 mg/kg and less than 10.0 mg/kg, respectively. The laboratory chloride concentration was reported below the laboratory detection limit of 30 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. Laboratory analytical reports are attached.

Table 2. Soil Laboratory Analytical Results San Juan 32-9 #201 BGT Closure, October 2013

Sample	מו	Date Sampled	Depth (ft)	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
		evel (NMAC 19.15		0.2	50	1	00	250
SC-1		10/25/13	0.5	<0.050	<0.25	<5.0	<10.0	<30

3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Field TPH concentrations exceeded the NMOCD action level of 100 mg/kg in four samples, with the highest concentration reported in S-5 with 2,290 mg/kg. However, laboratory analytical results for TPH (as GRO/DRO) in SC-1 were reported below the NMOCD action level of 100 mg/kg. Benzene and total BTEX concentrations in SC-1 were also below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Chloride concentrations in SC-1 were below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results for benzene, total BTEX, TPH, and chlorides, no further work is recommended at San Juan 32-9 #201.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

David J. Reese

Environmental Scientist

David & Reve

Crystal Tafoya San Juan 32-9 #201 BGT Closure Report November 25, 2013 Page 5 of 5


Elizabeth V MiNdly


Elizabeth McNally, P.E.

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, October 2013 AES Field Screening Report 102513 Hall Analytical Report 1310C62

R:\Animas 2000\Dropbox\2013 Projects\ConocoPhillips\SJ 32-9 #201\San Juan 32-9 #201 BGT Closure Report 112513.docx

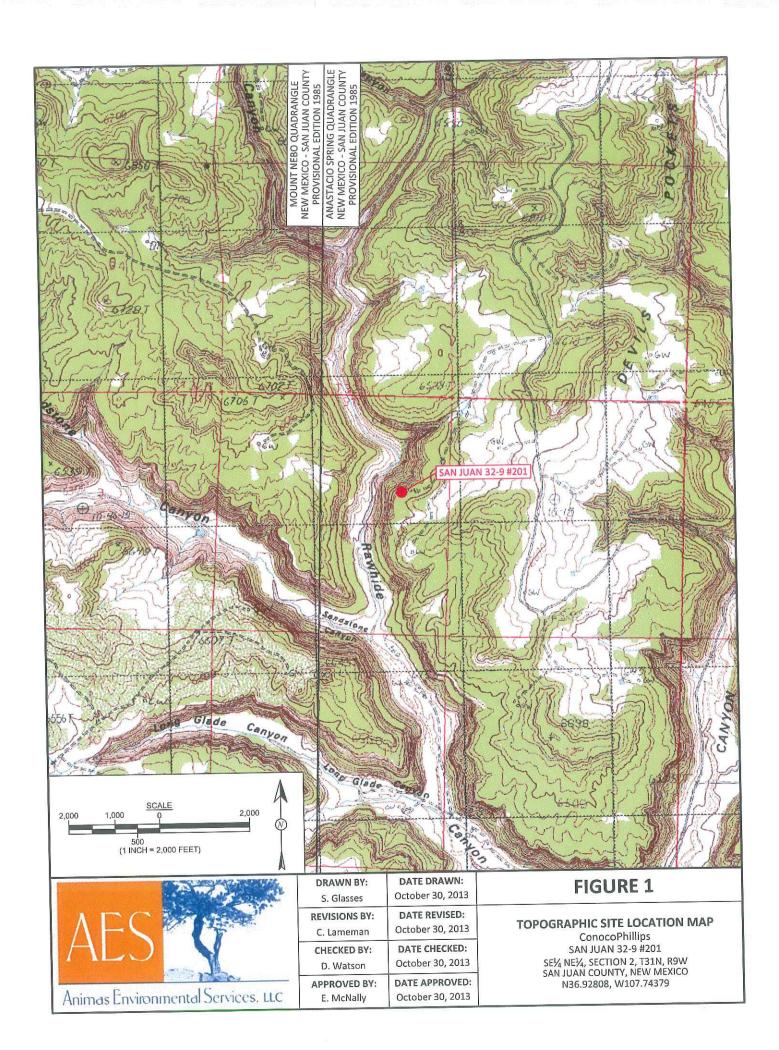

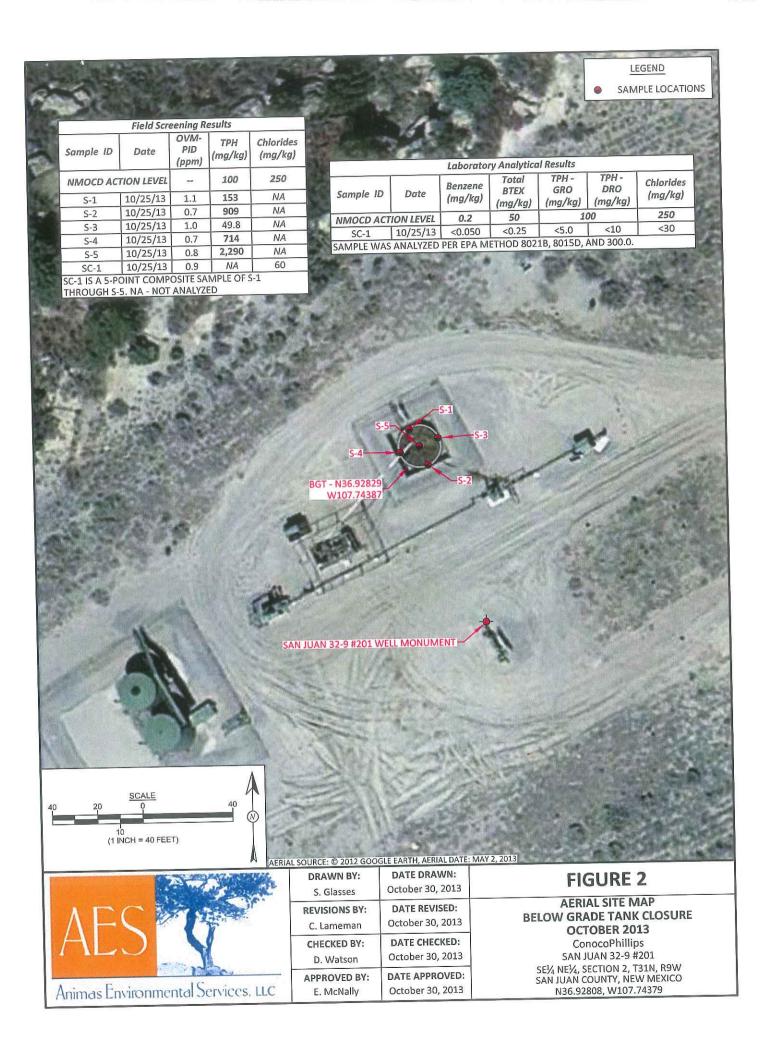

AES Field Screening Report

Client: ConocoPhillips

Project Location: San Juan 32-9 #201

Date: 10/25/2013

Matrix: Soil



Animas Environmental Services, LLC

www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

Durango, Colorado 970-403-3084

		Time of			Field	Field TPH				TPH
	Collection	Samule Samule	Sample	MVO	Chloride	Analysis	Field TPH*	TPH PQL		Analysts
Sample ID		Collection	Location	(mdd)	(mg/kg)	Time	(mg/kg)	(mg/kg)	DF	Initials
10	5		North	1.1	NA	14:28	153	20.0	П	C
- L	10/25/2013		South	0.7	NA	14:33	606	20.0	1	J
2-0	10/25/2010		Fact	10	NA	14:36	49.8	20.0	1	C
2-7	10/22/2013		West	0.7	Į V	14:39	714	20.0	1	J
0-t	10/22/2013		Center	0.8	AN	14:41	2,290**	20.0	1	C
SC-1	10/25/2013		Composite	6:0	09		Not,	Not Analyzed for TPH.	ЭН.	
י	1000									

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with

Silver Nitrate

Total Petroleum Hydrocarbons - USEPA 418.1

Analyst:

*Field TPH concentrations recorded may be below PQL.

Practical Quantitation Limit

Not Detected at the Reporting Limit

N NA

Dilution Factor Not Analyzed ** Sample analyzed on October 26, 2013.

Page 1 Report Finalized: 10/26/13



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

October 29, 2013

Debbie Watson Animas Environmental 624 East Comanche Farmington, NM 87401 TEL: (505) 486-4071

FAX

RE: CoP San Juan 32-9 #201

OrderNo.: 1310C62

Dear Debbie Watson:

Hall Environmental Analysis Laboratory received 1 sample(s) on 10/26/2013 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. In order to properly interpret your results it is imperative that you review this report in its entirety. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. When necessary, data qualifers are provided on both the sample analysis report and the QC summary report, both sections should be reviewed. All samples are reported, as received, unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

ADHS Cert #AZ0682 -- NMED-DWB Cert #NM9425 -- NMED-Micro Cert #NM0190

Sincerely,

Andy Freeman

Laboratory Manager

andyl

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report Lab Order 1310C62

Date Reported: 10/29/2013

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental

: CoP San Juan 32-9 #201

Lab ID: 1310C62-001

Client Sample ID: SC-1

Collection Date: 10/25/2013 10:15:00 AM

Received Date: 10/26/2013 10:20:00 AM

Analyses	Result	RL Qu	al Units	DF	Date Analyzed	Batch
EPA METHOD 8015D: DIESEL RANGE	ORGANICS				Ar	nalyst: BCN
Diesel Range Organics (DRO)	ND	10	mg/Kg	1	10/28/2013 12:30	:03 PM 10040
Surr: DNOP	111	66-131	%REC	1	10/28/2013 12:30	:03 PM 10040
EPA METHOD 8015D: GASOLINE RAI	NGE				Ar	nalyst: NSB
Gasoline Range Organics (GRO)	ND	5.0	mg/Kg	1	10/28/2013 10:29	:33 AM R14380
Surr: BFB	90.9	74.5-129	%REC	1	10/28/2013 10:29	:33 AM R14380
EPA METHOD 8021B: VOLATILES					Ai	nalyst: NSB
Benzene	ND	0.050	mg/Kg	1	10/28/2013 10:29	33 AM R14380
Toluene	ND	0.050	mg/Kg	1	10/28/2013 10:29	9:33 AM R14380
Ethylbenzene	ND	0.050	mg/Kg	1	10/28/2013 10:29	9:33 AM R14380
Xylenes, Total	ND	0.10	mg/Kg	1	10/28/2013 10:29	9:33 AM R14380
Surr: 4-Bromofluorobenzene	98.2	80-120	%REC	1	10/28/2013 10:29	9:33 AM R14380
EPA METHOD 300.0: ANIONS					Α	nalyst: JRR
Chloride	ND	30	mg/Kg	20	10/28/2013 12:5	5:06 PM 10046

Matrix: SOIL

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit Page 1 of 5
- P Sample pH greater than 2 for VOA and TOC only.
- RL Reporting Detection Limit

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1310C62

29-Oct-13

Client:

Animas Environmental

Project:

CoP San Juan 32-9 #201

Sample ID MB-10046

Sample ID LCS-10046

SampType: MBLK

TestCode: EPA Method 300.0: Anions

TestCode: EPA Method 300.0: Anions

Client ID:

Prep Date:

PBS

Batch ID: 10046

RunNo: 14404

Units: mg/Kg

Analyte

Analysis Date: 10/28/2013

SegNo: 413725

RPDLimit

Qual

Result ND

SPK value SPK Ref Val %REC LowLimit PQL 1.5

HighLimit

%RPD

Chloride

SampType: LCS Batch ID: 10046

RunNo: 14404

Prep Date: 10/28/2013

Client ID: LCSS

10/28/2013

SegNo: 413726

Units: mg/Kg

Analyte

Analysis Date: 10/28/2013

Qual

PQL

15.00

LowLimit

HighLimit

14

110

RPDLimit

Chloride

Result

SPK value SPK Ref Val %REC

%RPD

1.5

95.3

Qualifiers:

Value exceeds Maximum Contaminant Level.

Value above quantitation range E

Analyte detected below quantitation limits

RSD is greater than RSDlimit 0

RPD outside accepted recovery limits R Spike Recovery outside accepted recovery limits Analyte detected in the associated Method Blank

Holding times for preparation or analysis exceeded H

Not Detected at the Reporting Limit ND

Sample pH greater than 2 for VOA and TOC only. P

Reporting Detection Limit

Page 2 of 5

OC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1310C62

29-Oct-13

Client:

Animas Environmental

Project:

CoP San Juan 32-9 #201

Sample ID	MB-10040
Sample ID Client ID:	PBS

SampType: MBLK

TestCode: EPA Method 8015D: Diesel Range Organics

Prep Date: 10/28/2013

Batch ID: 10040 Analysis Date: 10/28/2013

10

10.00

50.00

SPK value SPK Ref Val

RunNo: 14373

LowLimit

LowLimit

77.1

66

SeqNo: 412964

Units: mg/Kg

131

Analyte Diesel Range Organics (DRO) Result PQL ND 10

SPK value SPK Ref Val %REC

HighLimit

%RPD **RPDLimit**

Qual

Surr: DNOP Sample ID LCS-10040

SampType: LCS

TestCode: EPA Method 8015D: Diesel Range Organics

66

Client ID: LCSS

Batch ID: 10040

RunNo: 14373

104

Units: mg/Kg

128

131

Analyte

Analysis Date: 10/28/2013 Prep Date: 10/28/2013

Result

50

SegNo: 412965

%REC

99.3

HighLimit

RPDLimit Qual

Qual

Diesel Range Organics (DRO) Surr: DNOP

5.000 5.1 SampType: MS

PQL

TestCode: EPA Method 8015D: Diesel Range Organics

%RPD

Client ID:

Sample ID 1310C62-001AMS SC-1

Batch ID: 10040

RunNo: 14373

Prep Date: 10/28/2013

Analysis Date: 10/29/2013

SeqNo: 413791

Units: mg/Kg HighLimit

%RPD **RPDLimit** Qual

RPDLimit

20

0

Page 3 of 5

SPK value SPK Ref Val %REC Result PQL Analyte 10 50.10 109 55 Diesel Range Organics (DRO) 5.010 5.0 Surr: DNOP

61.3 138 99.0 131

LowLimit

Client ID:

SampType: MSD Batch ID: 10040

RunNo: 14373

Prep Date:

10/28/2013

Sample ID 1310C62-001AMSD

Analysis Date: 10/29/2013

SeqNo: 413792

Units: mg/Kg

TestCode: EPA Method 8015D: Diesel Range Organics

SPK value SPK Ref Val HighLimit %RPD %REC LowLimit PQL Result Analyte 138 0.807 108 61.3 50.25 10 Diesel Range Organics (DRO) 54 66 131 0 104 Surr: DNOP 5.2 5.025

Oualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- Analyte detected below quantitation limits
- RSD is greater than RSDlimit
- RPD outside accepted recovery limits R
- Spike Recovery outside accepted recovery limits
- Analyte detected in the associated Method Blank В
- Holding times for preparation or analysis exceeded H
- Not Detected at the Reporting Limit ND
- Sample pH greater than 2 for VOA and TOC only. P
- Reporting Detection Limit

OC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1310C62

29-Oct-13

Client:

Animas Environmental

Project:

CoP San Juan 32-9 #201

Sample ID 5ML RB

SampType: MBLK

TestCode: EPA Method 8015D: Gasoline Range

Client ID:

PBS

Batch ID: R14380

5.0

RunNo: 14380

Prep Date:

Analysis Date: 10/28/2013

SeqNo: 413598

Units: mg/Kg

HighLimit

Qual

Analyte Gasoline Range Organics (GRO) Result ND

93.0

74.5

LowLimit

%RPD **RPDLimit**

Surr: BFB

930

1000

SPK value SPK Ref Val %REC

129

Sample ID 2.5UG GRO LCS

SampType: LCS

TestCode: EPA Method 8015D: Gasoline Range RunNo: 14380

Client ID: LCSS

Batch ID: R14380

Units: mg/Kg

Prep Date: Analyte

Analysis Date: 10/28/2013

PQL

SeqNo: 413601 %REC LowLimit SPK value SPK Ref Val

%RPD

Gasoline Range Organics (GRO)

Result 26

25.00

104

74.5 74.5 126

RPDLimit Qual

Surr: BFB

990

1000

99.4

HighLimit 129

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range E
- Analyte detected below quantitation limits
- 0 RSD is greater than RSDlimit
- RPD outside accepted recovery limits R
- Spike Recovery outside accepted recovery limits
- Analyte detected in the associated Method Blank В
- Holding times for preparation or analysis exceeded Η
- Not Detected at the Reporting Limit ND
- Sample pH greater than 2 for VOA and TOC only. P
- Reporting Detection Limit

Page 4 of 5

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1310C62

29-Oct-13

Client:

Animas Environmental

Project:

CoP San Juan 32-9 #201

Sample ID 5ML RB	SampT	уре: МЕ	BLK	TestCode: EPA Method 8021B: Volatiles								
Client ID: PBS	Batch	ID: R1	4380	R	RunNo: 1	4380						
Prep Date:	Analysis Date: 10/28/2013			S	SeqNo: 4	13623	Units: mg/Kg					
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual		
Benzene	ND	0.050										
Toluene	ND	0.050										
Ethylbenzene	ND	0.050										
Xylenes, Total	ND	0.10										
Surr: 4-Bromofluorobenzene	1.0		1.000		101	80	120					

Sample ID 100NG BTEX LC	SampT	ype: LC	s	TestCode: EPA Method 8021B: Volatiles									
Client ID: LCSS	Batcl	h ID: R1	4380	F									
Prep Date:	Analysis D	Date: 10	0/28/2013	8	SeqNo: 4	13787	Units: mg/Kg						
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual			
Benzene	0.99	0.050	1.000	0	99.1	80	120						
Toluene	1.0	0.050	1.000	0	101	80	120						
Ethylbenzene	1.0	0.050	1.000	0	102	80	120						
Xylenes, Total	3.1	0.10	3.000	0	104	80	120						
Surr: 4-Bromofluorobenzene	1.1		1.000		106	80	120						

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit

P Sample pH greater than 2 for VOA and TOC only.

RL Reporting Detection Limit

Page 5 of 5



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109

TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

Sample Log-In Check List

Client Name: Animas Environmental Work Order Number	: 1310C62		RoptNo: 1	V- 3 (a)
Received by/date: AF 10/21/13				
Logged By: Anne Thorne 10/26/2013 10:20:00	AM	aone Am		
Completed By: Anne Thorne 10/28/2013		an Il-		Tab
Reviewed By: A 10/28/13				
Chain of Custody				
Custody seals intact on sample bottles?	Yes	No 🗆	Not Present	
2. Is Chain of Custody complete?	Yes 🗸	No 🗆	Not Present	
3. How was the sample delivered?	Courier			
3. How was the sample delivered?				
<u>Log In</u>				
4. Was an attempt made to cool the samples?	Yes 🗹	No 🗆	NA 🗆	
5. Were all samples received at a temperature of >0° C to 6.0°C	Yes 🗹	No 🗆	NA 🗆	
6. Sample(s) in proper container(s)?	Yes 🗹	No 🗆		
7. Sufficient sample volume for indicated test(s)?	Yes 🗹	No 🗆		
Are samples (except VOA and ONG) properly preserved?	Yes 🗹	No 🗆		
9. Was preservative added to bottles?	Yes 🗆	No 🗸	NA 🗆	
		N= []	No VOA Vials ☑	
10.VOA vials have zero headspace?	Yes 🗆	No □	NO VOA VIAIS (E)	
11. Were any sample containers received broken?	Yes	No 🗹	# of preserved bottles checked	
12. Does paperwork match bottle labels?	Yes 🗹	No 🗆	for pH:(<2 or	>12 unless noted)
(Note discrepancies on chain of custody)	Yes 🗹	No 🗆	Adjusted?	
13. Are matrices correctly identified on Chain of Custody?	Yes 🗹	No 🗆		
14. Is it clear what analyses were requested?	Yes 🗹	No 🗆	Checked by:	
15. Were all holding times able to be met? (If no, notify customer for authorization.)	169 151			
Special Handling (if applicable)				
16. Was client notified of all discrepancies with this order?	Yes 🗌	No 🗆	NA 🗹	
Person Notified: Dat	е			
By Whom: Via	eMail	Phone Fax	☐ In Person	
Regarding:				
Client Instructions:				
17. Additional remarks:				
18. Cooler Information Cooler No Temp °C Condition Seal Intact Seal No	Seal Date	Signed By		
Cooler No Temp °C Condition Seal Intact Seal No. 1 3.3 Good Yes	Jan Brown Back			

HALL ENVIRONMENTAL	ANALYSIS LABORATORY	rins NE - Albuquerque, NM 87109	45-3975 Fax 505-345-4107	Anal	([†] O:	SiMS)	(AOV)	hod Aleta Al	EDB (Met RAH's (83 RCRA 8 I Anions (F 8081 Pes V) 8250 RV	×						1 to Conocophillips * Per Debois User: Benake Watson, Change by: Jess Housen River.	contracted data will be clearly notated on the analytical report.
		4901 Hawkins NE -	Tel 505-345-3975	191.	(Vlu	RO LINK	HTT + :	D) 8	BTEX + 10 BTEX + M TPH 8015	XXX						Remarks: Bill W6:10350850 Pot Cok.	Sper : DALC CIGHLEGES spossibility. Any sub-contracte
Turn-Around Time:	□ Standard A Rush Sand Day Project Name:	120 Sun Man 32-9 #261			Project Manager:	D. Watsun	Sampler: 20 On Sampler: X is a second of the	Sample Temperature	# Type / Z. NO	MREDIT LITE AMERICAN	2					Received by: Date Time Date Time	1712 Minth David Subscription of the subcontracted to other accredited laboratories. This serves as notice of this possibility. Any sub-contracted data will be clearly notated on the analytical report.
Chain-of-Custody Record	Client: Animas Brahanmental Scritces	Wailing Address: Later Annual Later			Phone #: 525-564-48	QA/QC Package: D. Level 4 (Full Validation)	n □ Other	□ EDD (Type)	Date Time Matrix Sample Request ID	1-25 125 25-1	100 201					W.	12/13 17t2 With the Months with the submitted to Hall Environmental may be sub

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-141 Revised October 10, 2003

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

				10-10-		,								
-			Rele	ase Notific	cation	and Co	rrective A	ction						
						OPERA	ΓOR	Initia	ıl Report	\boxtimes	Final Report			
Name of Co	mpany B	urlington Res	ources			Contact Kenny Davis								
Address 340	01 East 30	^h St, Farmin	gton, NM	I		Telephone No.(505) 599-4045								
Facility Nar	ne: San Ju	ıan 32-9 Un	it 201			Facility Type: Gas Well								
Surface Ow	ner State		Mineral C		State N OF RE	LEASE		Lease N	lo. E-3150	-1				
Unit Letter	Section 17	Township 32N	Range 12W	Feet from the 880	-	South Line	Feet from the 560	East/West Line East		County San Juan				
	1		1	Latitude36.99	101300	Longitud	e <u>-108.1109000</u>	0						

A	17	32N	12W	880	North	560	East	San Juan					
				Latitude36.9	9101300	Longitude-108.1109000	00						
	NATURE OF RELEASE												
Type of Rele	ase BGT C	losure Summa	arv			Volume of Release N/A Volume Recovered N/A							
Source of Re						Date and Hour of Occurred	nce N/A Date	and Hour of Discovery N/A					
Was Immedi	ate Notice (Given?				If YES, To Whom?							
31 - 2440-1924 (S.C. Sandrard A. (2014) (2.140-102) (S.C.	64 CA-600 CA		Yes _	No Not	Required	N/A							
By Whom?						Date and Hour N/A	500 100000 W						
Was a Water		ched?				If YES, Volume Impacting	g the Watercours	÷.					
N/	A		☐ Yes	s 🛛 No		N/A							
If a Watercon N/A	urse was Im	pacted, Descr	ibe Fully.	k									
N/A		em and Reme		8									
BGT Closu	Describe Area Affected and Cleanup Action Taken.* BGT Closure: NO RELEASE FOUND UPON REMOVAL												
regulations a public health should their or the enviro	I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.												
						OIL CO	NSERVATION	ON DIVISION					
Signature: Printed Nam	ne: Kenny I	Davis)			Approved by District Superv							
Title: Staff						Approval Date:	Expira	tion Date:					
	270	.r.davis@cond	ocophillips	s.com		Conditions of Approval:		Attached					

Date: 12/5/14 Phone: (505) 599-4045

* Attach Additional Sheets If Necessary



