District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S St Francis Dr , Santa Fe, NM 87505

Type of action:

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

72	3	6	
10	•	4	

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method

☐ Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method ☐ Modification to an existing permit ☐ Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the
environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: WILLIAMS PRODUCTION COMPANY, LLC OGRID #: 120782
Address: PO Box 640 Aztec, NM 87410
Facility or well name: ROSA UNIT #188
API Number:OCD Permit Number:
Section 34K Township 31N Range 05W County RIO ARRIBA
Latitude: 36.85452999999999 , Longitude 107.35276 NAD: 1983 Surface Owner FEDERAL
Pit: Subsection F or G of 19.15.17.11 NMAC
Temporary: Drilling Workover
Permanent Emergency Cavitation P&A
Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other
String-Reinforced
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3.
Closed-loop System: Subsection H of 19.15.17.11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams. Welded Factory Other 4. Below-grade tank: Subsection I of 19.15.17.11 NMAC
A RECEIVED 3
Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume: 120 kbl Time of fluid: PRODUCED WATER &
Volume: 120 kbl Time of fluid: PRODUCED WATER &
Volume: 120 kbl Time of fluid: PRODUCED WATER &
Volume: 120 kbl Time of fluid: PRODUCED WATER &
Volume: 120 bbl Type of fluid: PRODUCED WATER Tank Construction material: FIBERGLASS TANK w/BANDED 20-mil HDPE SECONDARY LINER Secondary containment with leak detection □ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
Volume: 120 bbl Type of fluid: PRODUCED WATER Tank Construction material: FIBERGLASS TANK w/BANDED 20-mil HDPE SECONDARY LINER Secondary containment with leak detection □ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner □ Visible sidewalls only □ Other □ Visible sidewalls only □ Other
Volume: 120 bbl Type of fluid: PRODUCED WATER Tank Construction material: FIBERGLASS TANK w/BANDED 20-mil HDPE SECONDARY LINER Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thickness mil HDPE PVC Other

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet	hospital,
Alternate. Please specify	
7. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)	
8. Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district oproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ⊠ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 500 horizontal feet of a private, 'domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes 🛛 No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes 🛭 No
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: Previously Approved Operating and Maintenance Plan API Number: API Number: (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.19 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
☐ Alternative Proposed Closure Method: ☐ Waste Excavation and Removal ☐ Waste Removal (Closed-loop systems only) ☐ On-site Closure Method (Only for temporary pits and closed-loop systems) ☐ In-place Burial ☐ On-site Trench Burial ☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Instructions: Please indentify the facility or facilities for the disposal of liquids facilities are required.		
Disposal Facility Name:	Disposal Facility Permit Number:	
Disposal Facility Name:	Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities o ☐ Yes (If yes, please provide the information below) ☐ No		
Required for impacted areas which will not be used for future service and operati Soil Backfill and Cover Design Specifications based upon the appropria Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	te requirements of Subsection H of 19.15.17.13 NMA n I of 19.15.17.13 NMAC	С
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the provided below. Requests regarding changes to certain siting criteria may required an exception which must be submitted to the Santa Fe Environment demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC	ire administrative approval from the appropriate dist al Bureau office for consideration of approval. Just	rict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Da	ata obtained from nearby wells	☐ Yes ☒ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Da	ata obtained from nearby wells	☐ Yes ☑ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Da	ata obtained from nearby wells	☐ Yes ☐ No 図 NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other si lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	gnificant watercourse or lakebed, sinkhole, or playa	☐ Yes ☑ No
Within 300 feet from a permanent residence, school, hospital, institution, or churc - Visual inspection (certification) of the proposed site; Aerial photo; Satelli		☐ Yes ⊠ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that le watering purposes, or within 1000 horizontal feet of any other fresh water well or - NM Office of the State Engineer - iWATERS database; Visual inspection	spring, in existence at the time of initial application.	☐ Yes ⊠ No
Within incorporated municipal boundaries or within a defined municipal fresh was adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written appro		☐ Yes 🖾 No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visu	ual inspection (certification) of the proposed site	☐ Yes ☑ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Minin	g and Mineral Division	☐ Yes ☒ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geolog Society; Topographic map 	gy & Mineral Resources; USGS, NM Geological	☐ Yes ☑ No
Within a 100-year floodplain FEMA map		☐ Yes ⊠ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Construction/Design Plan of Temporary Pit (for in-place burial of a drying Protocols and Procedures - based upon the appropriate requirements of 19.1 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Disposal Facility Name and Permit Number (for liquids, drilling fluids and Soil Cover Design - based upon the appropriate requirements of Subsection Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	quirements of 19.15.17.10 NMAC of Subsection F of 19.15.17.13 NMAC ppropriate requirements of 19.15.17.11 NMAC pad) - based upon the appropriate requirements of 19. 5.17.13 NMAC quirements of Subsection F of 19.15.17.13 NMAC of Subsection F of 19.15.17.13 NMAC drill cuttings or in case on-site closure standards cannot 19.15.17.13 NMAC I of 19.15.17.13 NMAC	15.17.11 NMAC

19.
Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Title:
- Table (1 1111).
Signature: Date:
e-mail address: Telephone:
20.
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature: Approval Date: 969/201
1
Title: Compliance Officer OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.
☐ Closure Completion Date:7/29/2010
22.
Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain.
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.
Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name: Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) No
Required for impacted areas which will not be used for future service and operations. Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique
24.
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check
mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)
Proof of Deed Notice (required for on-site closure)
Plot Plan (for on-site closures and temporary pits)
☐ Confirmation Sampling Analytical Results (if applicable) ☐ Waste Material Sampling Analytical Results (required for on-site closure)
Disposal Facility Name and Permit Number
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)
On-site Closure Location: Latitude Longitude NAD: \[\Begin{array}{c} 1927 \Bigcap 1983 \]
25.
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): Vanessa Fields Title: EH&S Coordinator
Signature:
e-mail address:vanessa.fields@williams.com



Exploration & Production PO Box 640 Aztcc NM 81137 505/634 4219 505/634 4214 fox

March 10, 2009

Mr Mark Kelly Bureau of Land Management Farmington Field Office 1235 La Plata Hwy Farmington, NM 87401

Sent via Certified Mail

RE Notification of Production Pit Closure

Rule 19 15 17 13 NMAC

Production Pits associated Natural Gas Development

Operated by Williams Production Co, LLC

Pursuant to Rule 19 15 17 13 NMAC, this correspondence is to notify the Bureau of Land Management, Farmington Field Office of Williams Production LLC's (Williams') intent to clean close all production pits on the attached list of wells operated with the District in San Juan County and Rio Arriba County, New Mexico Closure will follow the plan included with this correspondence

Thank you for your consideration. If there are any questions or additional information is requested, please contact me at (505) 634-4209.

Respectfully submitted.

Holly C Perkins EH&S Specialist

Encl: Williams Production Pit Inventory List (Federal wells)

San Juan Basin - New Mexico Assets: Below-Grade Tank Closure Plan

cc Environmental File

Williams Production Co., LLC San Juan Basin: New Mexico Assets

Below Grade York Removal Closure Plan

In accordance with Role 19.15.17.13 NMAC, the following plan describes the general closure requirements of below grade tanks (BG1) on Williams Production Co. LCC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard closure procedure for all BG1s regulated under Role 19.15.17 NMAC and operated by WPX. For those closures which do not conform to this standard closure plan a separate well/pit specific closure plan will be developed and utilized.

Closure Conditions and Timing:

Pursuant to 19.15.17.13 (A) NMAC WPX will initiate closure of any BG3 should any one of these conditions occur

- The Division requires closure because of imminent danger to fresh water, public health or the
 environment
- The integrity of the BG1 fails. Notification will be within 48 hours to the Division and closure will be schedule as specified in 19.15.17.12 (A)(5) NMAC.
- WPX chooses to take the BG1 out of service due to operational needs. Closure under these conditions will be closed within 60 days of cessation of the BG1's operation.
- KGIs installed prior to June 16, 2008 that do not meet the requirements under 19,15,17,11,1(6).
 MMAC and WEX chooses not to retrofit or upgrade. Closure under these conditions will be completed within five years (by June 16, 2013).

General Plan Requirements:

- Prior to initiating any BG1 Closure except in the case of an emergency. WPX will review County Tax Records for the current surface owner of record. The surface owner of record will be notified of the intent to close the EGT by certified mail and a copy of this notification will be included in the closure report. In the case of an emergency, the surface owner of record will be notified as soon as practical.
- Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following.
 - a Operators Name (WFX)
 - b. Well Name and API Number
 - c Location (USTR)
- All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks temporary frac tank...) The well will be temporarily shut in until the rerouting is completed.
- All produced water will be removed from the BGT following discharge pipe rerouting Produced water will be disposed at one of the following NMOCD approved facilities depending on the proximity of the BGT site: Rosa Unit SWD #1 (Order: SWD-916 API: 30-039 27055). Rosa Unit #94 (Order: SWD-3RP-1003 0, API: 30-039 23035), Jillson Fed. SWD #001 (Order: R10168/R10168A, API: 30-039 25465), Middle Mesa SWD #001 (Order: SWD 350 0, API: 30-045 27004) and/or Basin Disposal (Permit NM 01-0005).

Solids and sludges will be shoveled and for vacuumeo out for disposal at Envirotech (Pemit Number 14M 0) 001 i

: WPS will obtain prior approval from MMOCD to dispose recycle rease of recions the BCP and provide documentation of the disposition of the BCF in the closure report. Size materials will be recycled or reused as approved by the Division. Therefores tanks will be empty cut up or shredded, and EEA cleaned for disposal as solio waste. Their materials will

be cleaned without soils or contaminated material for disposal as solid waste. Fiberalass tanks and liner materials will meet the conditions of paragraph 1 subsection D of 19 15 9/12 NMAC Disposal will be at a licensed disposal facility presently San Joon Regional Fandfill operated by Waste Management under NMED Permit SWM 052426

- Any equipment associated with the BG1 that is no longer required for some other number following the closure will be removed from the location.
- following removal of the tank and any liner material a five point composite sample will be 8 taken of the excavation and tested per 19.15.17.13(F)(4) NMAC as identified in Table 1. Grab. samples will be collected from any area that is well discolored or showing other evidence of a release. Results will be report to the Division following receipt from the lab on Form C 141

	Table 1. Closure Criteria for BG1	5
Components	Testing Methods	Closure Limits (mg/Kg)
Benzene	EPA SW 846 Melhod 8021B of 8260B	0.2
BIEX	EPA SW-846 Method 8021B or 8260B	50
TFH [EPA SW-846 Method 418.111	100

Method modified for solid waste

Chlorides

If back ground concentration of Chlorides preader than 250 mg/kg, their higher concentration with he

If the Division and/or WPX determine there is a release. WPX will comply with 19,15.3.116 NMAC and 19 15 1.19 NMAC

EPA SW-846 Method 300 111

- 10 Upon completion of the tank removal, the excavation will be backfilled with non-waste earthen material compacted and covered with a minimum of one foot of top soil or background thickness whichever is greater and to existing grode. The surface will be recontoured to match the native grade and prevent ponding.
- 11 for those portions of the former pit area no longer required for production activities. WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical or by other Division approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un impacted) consisting of at least three native plant species, including at least one grass but not including noxious weeds, and mointained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: If a surface owner agreement requires reseeding or other surface restoration that do not meet re-vegetation requirements of 19.15.17.13 FNMAC then WPX will submit the proposed allemative with written documentation that the surface owner agrees to the alternative for Division approval
- 12 for those portions of the former pit area required for production activities reseeding will be done at well abandonment, and following the procedure noted above

Closure Report

All closure activities will include proper accumentation and will be submitted to OCD within 60 days of the BGI closure on a Closure keroort using Division Form C 144. The Report will include the tollowing

- Froof of Choose Profession Contractions HMOLL
- Fackfilling & Love 1 in January
- Site Endorchis and Contracted
- Available inspection for a

- Confirmation Sampling Product of February
- Insposol form, womers one i fur i hand eller

- Application kare & seeang technolin.
- Thoto Documentown of Recommon

WELLS W/FEDERAL	A #54	T & 4.7	CEC	71676	n	חוד דערי	CONSTRUCTION WATERWAY
SURF MGT	API	FMT	SEC	אשד	RNG	PIT TYPI	CONSTRUCTION MATERIAL
COX CANYON UNIT #001	3004511397	BI ANCO MV	16N	32N	1 1 VV	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mi
COX CANYON UNIT #001A	3004522086	BLANCO MV	160.	3211	1 1 VV	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 m
COX CANYON UNIT #001B	3004530791	BLANCO MV	161	3211	11VV	BGT	HDPE SECONDARY LINER
COX CANYON UNIT #001C	3004532023	BI ANCO MV	16E	32N	11W	BG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20 mi
LOX CANYON UNIT #003	3004511495	BI ANCO MV	. 91	3211	11VV	BG1	HDPE SECONDARY LINER
COX CANYON UNIT #003A	3004522088	BLANCO MV	945	32N	11VV	BG1	DBI WALL STEEL
OX CANYON UNIT #003B	3004530871	BI ANCO MV	9,1	32N	11W	BG1	DBL WALL STEEL
COX CANYON UNIT #004	3004511368	BLANCO MV	21A	32N	11W	BGT	DBI WALI STEEL
COX CANYON UNIT #004A	3004522093	BI ANCO MV	21P	32N	11W	BGI	DBL WALL STEEL
COX CANYON UNIT #004B	3004532186	BLANCO MV	21f	32N	11W	BG1	DBI WALL STEEL
COX CANYON UNIT #005	3004511326	BI ANCO MV	21K	32N	1 1 VV	BGI	DBI WALL STEEL
OX CANYON UNIT #005A	3004522094	BLANCO MV BASIN DK /	21[.)	32N	11W	BG1	DBI WALI STEEL
COX CANYON UNIT #005B	3004532142	BI ANCO MV	21N	32N	11W	BG1	DBI WALL STEEL
OX CANYON UNIT #005C	3004533493	BI ANCO MV	21F	32N	11W	BG1	DBI WALL STEEL
OX CANYON UNIT #006	3004511463	BLANCO MV	16A	32N	11W	BG1	DBI WALL STEEL
OX CANYON UNIT #006A	3004522095	BLANCO MV	161	32N	11W	BG1	DBL WALL STEEL
OX CANYON UNIT #006B	3004532693	BI ANCO MV	16B	32N	11W	BG1	DBI WALL STEEL
OX CANYON UNIT #006C	3004532733	BLANCO MV	16O	32N	11W	BG1	DBI WALL STEEL
OX CANYON UNIT #007	3004511455	BLANCO MV	176	32N	11W	FGP	DBI WALL STEEL
OX CANYON UNIT #007A	3004522091	BLANCO MV	170	32N	11W		DBL WALL STEEL
OX CANYON UNIT #007C	3004533018	BASIN DK	17K	32N	11W		DBI WALL STEEL FIBERGLASS TANK W/BANDED 20-nii
OX CANYON UNIT #008	3004511492	BLANCO MV	81	32N	11W		HDPE SECONDARY LINER
OX CANYON UNIT #008A	3004522096	BLANCO MV	17H	32N	11W		DBL WALL STEEL FIBERGLASS TANK WBANDED 20-mil
8800# TINU NOYNAD XC	3004532080	BI ANCO MV	8P	32N	11W		HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mi
DX CANYON UNIT #008C DX CANYON UNIT #009A	3004531187	BLANCO MV	17P	32N	11W		HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mi
OM OX CANYON UNIT #009B	3004522092	BLANCO MV BASIN DK /	20D	32N	11W		HDPE SECONDARY LINER
MC	3004533926	BLANCO MV BASIN DK /	20B	32N	11W		DBL WALL STEEL
DX CANYON UNIT #009C	3003933851	BLANCO MV	20F	32N	11W		DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
DX CANYON UNIT #U13	3004521489	BLANCO PC	20A	32N	11VV	BG1	HDPE SECONDARY LINER

WELLS W/FEDERAL SURF MG1	A D I	ESAT	C C C	718/61	DNC	מעד דעמ	E CONSTRUCTION MATERIAL
COX CANYON UNIT #023	API	FMT	SEC	IWN	RNG	PIT TYP	
COM	3004522537	BLANCO PC	176	3211	11VV	BG1	FIBERGLASS TANK WBANDED 20-mil HDPE SECONDARY LINER
COX CANYON UNIT #025	3004522572	BI ANCO PC	90	32N	1 1 VV	BG1	FIBERGLASS TANK W/BANDED 20 mil HDPE SECONDARY LINER
COX CANYON UNIT #200	3004527878	BASIN FTC.	91	32N	11W	BG1	FIBERGLASS TANK W/BANDED 20 mil HDPE SECONDARY LINER
COX CANYON UNIT #200A	3004532126	BASINFIC	90	32N	11W	BG1	FIBERGLASS TANK W/BANDED 20 mil HDPE SECONDARY LINER
COX CANYON UNIT #203	3004527872	BASIN FIC	17A	32N	11W	BG1	FIBERGLASS TANK W/BANDFD 20-mil HDPE SECONDARY LINER
MADDOX #001	3004511487	BLANCO MV	10N	3211	1 1 VV	BGT	DBI WALL STEEL
MADDOX #001A	3004523539	BLANCO MV	10P	32N	1 1 VV	BG1	DBI WALL STEEL
NM 32-11 #001	3004511309	BLANCO MV	200	32N	1 1 VV	BG1	DBL WALL STEEL
NM 32-11 #001B COM	3004532024	BASIN DK / BLANCO MV BASIN DK /	20J	32N	1 1 VV	BG1	DBI WALL STEEL
NM 32-11 #001C COM	3004532804	BLANCO MV	201	32N	11W	BG1	DBL WALL STEEL
NM 32-11 #002 COM	3004511380	BI ANCO MV	19A	32N	11W	BG1	FIBERGLASS TANK w/BANDE() 20-mil HDPE SECONDARY LINER
NM 32-11 #002A COM	3004529017	BI ANCO MV	190	32N	11W	BGT	DBI WALI STEEL
VM 32-11 #002B COM	3004532670	BLANCO MV	191	32N	11W	BGT	DBI WALI STEEL
VM 32-11 #002C COM	3004533077	BLANCO MV	19G	32N	11W	BG1	DBI WALL STEEL
ROSA UNIT #001 SWD	3003927055	SWD BASIN DK /	231	31N	06VV	BG1	DBL WALL STEEL
OSA UNIT #001E	3003925411	BLANCO MV	11P	31N	06W	BGI	FIBERGLASS TANK w/BANDED 20-mil HDPE SECONDARY LINER
'OSA UNIT #005A	3003925407	ROSA PC BASIN DK /	26P	31N	06W	BG1	DBI WALL STEEL
OSA UNIT #005B	3003926927	BI ANCO MV	26B	31N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mill
OSA UNIT #005Y	3003926078	BLANCO MV BLANCO MV /	26H	31N	06W	BG1	HDPF SECONDARY LINER FIBERGI ASS TANK W/BANDED 20-mil
800# TINU AZC	3003907944	ROSA PC BLANCO MV /	26M	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mill
3800# FINU ARC	3003907944	ROSA PC BLANCO MV /	26M	31N	067/	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
JSA UNI1 #008A	3003925430	ROSA PC	26D	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
SA UNIT #008C	3003926944	BI ANCO MV	26N	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
)SA UNIT #009	3003907975	BLANCO MV BASIN DK /	11K	31N	06W	BG1	HDPE SECONDARY LINER
SA UNIT #009A	3003925584	BLANCO MV	11C	31N	06W	BGT	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
SA UNIT #009B	3003927042	BI ANCO MV	11E	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
SA UNIT #010B	3003926556	BI ANCO MV	13N	31N	0677	BG1	HDPE SECONDARY LINER
5A UNIT #010C	3003926918	BLANCO MV	13N	31N	06VV	BG1	DBL WALL STEEL
3010# FINU A6	3003926556	BLANCO MV	1314	31N	06VV	BG1	DBL WALL STEEL

WELLS W/FEDERAL							
SURF MGT	API	FM1	SEC	IWN	RNG	PIT TYPE	CONSTRUCTION MATERIAL
ROSA UNIT #012A	2002025000	BLANCO MV / ROSA PC	15J	31N	OGW	BG1	DBI WALL STEEL
RUSA UNIT #U12A	3003925900	BASIN DK /	153	.5 110	עעיאנו	D(2)	FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #012B	3003926555	BLANCO MV	15P	31N	06VV	BGI	HDPE SECONDARY LINER
THE PROPERTY OF THE PARTY OF TH	300002 0000			3111			
ROSA UNIT #012C	3003929486	BLANCO MV	15A	31N	oevv	861	SINGLE WALL STEEL
							LIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #013	3003907936	BLANCO MV	31G	31N	05 Vv	BG1	HDPE SECONDARY LINER
					•		FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #013A	3003926298	BLANCO MV	· 31f	31N	05VV	BG1	HDPE SECONDARY LINER
		BASIN DK /					
ROSA UNIT #013B COM	3003929834	BLANCO MV	31A	31N	()5 Vv	BGT	DBL WALL STEEL
DOOA 114113 #044	04.004.007.05.0	DI 41/00 4/1/	4:05	0.414	00147	f) (2:1	FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #014	3003907958	BLANCO MV	23B	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #014A	2002026280	BLANCO MV	23P	31N	06W	BG1	HDPE SECONDARY LINER
	3003926280	BASIN DK /	200	2114	UOVV	DG1	THE E SECONDARY THERE
ROSA UNIT #014C	3003930132	BLANCO MV	2311	31N	06W	BG1	DBI WALL STEEL
THE THE TAX TO THE TAX	3003330132	DET III O III	2.511	5111	0,011	201	FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #015	3003907946	BI ANCO MV	2911	31N	05VV	BG1	HDPE SECONDARY LINER
							FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #016	3003907963	BLANCO MV	14N	31N	0677	BGI	HDPE SECONDARY LINER
·							FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #016A	3003925496	BLANCO MV	14C	31N	0674	BGT	HDPE SECONDARY LINER
							FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #016B	3003926218	BLANCO MV	14M	31N	06VV	BGT	HDPE SECONDARY LINER
							FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #017A	3003926272	BLANCO MV	20O	31N	05W	BG1	HDPE SECONDARY LINER
NOON LINE WATER	200000000	BASIN DK /	00.1	0.441	0510	E C T	FIBERGLASS TANK w/BANDED 20-mill HDPE SECONDARY LINER
ROSA UNIT #017B	3003926971	BLANCO MV	20J	31N	05VV	BG1	FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #018	3003907960	BLANCO MV / ROSA PC	22H	31N	06W	BGT	HDPE SECONDARY LINER
COOK OWN #010	3003907900	BLANCO MV /	2211	STITE	OOVV	1701	THE SECOND THE ENTER
OSA UNIT #018A	3003925436	ROSA PC	22P	31N	06W	SGI	DBI WALL STEEL
	00000211100						
OSA UNIT #018B	3003927052	BLANCO MV	220	31N	06W	BG1	DBL WALL STEEL
							FIBERGLASS TANK w/BANDED 20 mit
OSA UNIT #019	3003907955	BI ANCO MV	24K	3111	06W	12, 12, 1	HDPE SECONDARY LINER
							FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #019B	3003926560	BLANCO MV	241	3111	06W	BG1	HDPE SECONDARY LINER
OCALIBIT HOTOC	000000000	DI ANCO MV	0.415	0.481	Octor	DC I	DBL WALL STEEL
OSA UNIT #019C	3003929625	BLANCO MV	241)	31N	06W	BGT	DBL WAIT STEEL
OSA UNIT #019C	3003929625	BL ANCO MV	241)	31N	UGW	BG1	DBL WALL STEEL
007. 011. 110.100	3003320023	DET MOO III	2 712	3114	OOV		FIBERGLASS TANK W/BANDED 20 mil
OSA UNI1 #020	3003907969	BL ANCO MV	14G	31IV	OGVV		HDPE SECONDARY LINER
	00000000						FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #020A	3003925495	BLANCO MV	14()	31N	06W	BGT	HDPE SECONDARY LINER
						•	
DSA UNIT #020B	3003926220	BLANCO MV	14A	31N	06Vv	BG1	DBL WALL STEEL
							FIBERGLASS TANK w/BANDED 20-mil
OSA UNIT #020C	3003926221	BLANCO MV	14J	31N	0677		HDPE SECONDARY LINER
							FIBERGLASS TANK w/BANDED 20-mil
)SA UNIT #021A	3003926121	BLANCO MV	23C	31N	OGVV	BGT	HDPE SECONDARY LINER
A 1447 WALL	0.00	DI MICO	661	5		0.07	COLUMN OTES
)SA UNIT #021B	3003926554	BLANCO MV	23K	31N	0644		DBL WALL STEEL
)SA UNIT #02;	3003907971	BLANCO MV	18A	31N	05VV		FIBERGLASS TANK w/BANDE() 2()-mil- HDPE SECONDARY LINER

WELLS W/FEDERAL							
SURF MGT	API	FMT	SEC	TWN	RNG	PIT TYP	
ROSA UNIT #027A	3003926390	BI ANCO MV	18C	31N	05W	BGT	FIBERGLASS TANK W/BANDED 20-mil HDPE SECONDARY LINER
ROSA UNIT #023	3003907942	BI ANCO MV	29M	31N	05W	BGI	FIBERGLASS TANK W/BANDED 20 mil HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #023B	3003926553	BLANCO MV BASIN DK /	29F	31N	05Vv	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #023C	3003927609	BI ANCO MV	291	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #024	3003907933	BLANCO MV BASIN DK /	32M	31N	05W	BGT	HDPE SECONDARY LINER
ROSA UNIT #024A	3003925568	BLANCO MV BASIN DK /	32E	31N	05W	SG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #024B	3003926630	BLANCO MV BASIN DK /	32N	31N	05W	BG1	HDPE SECONDARY LINER FIBERGI ASS TANK WBANDED 20-mil
ROSA UNIT #0240	3003926968	BLANCO MV BASIN DK /	32C	31N	05VV	BG1	HDPE SECONDARY LINER
ROSA UNIT #026A	3003925580	BI ANCO MV	320	31N	05W	SG1	DBL WALL STEEL
ROSA UNIT #026B	3003926788	BASIN DK	32G	31N	05W	SG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #029	3004511136	BLANCO MV BASIN DK /	32H	32N	06VV	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #029B	3004530709	BLANCO MV BASIN DK /	32B	32N	06Vv	BG1	HDPE SECONDARY LINER
ROSA UNIT #029M	3004529584	BLANCO MV BASIN DK /	321	32N	06VV	BG1	DBI WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #030 COM	3003925570	BLANCO MV	120	31N	06VV	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #030A	3003926068	BI ANCO MV	12M	31N	06W	BGI	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #030B	3003926601	BI ANCO MV	12N	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #030C	3003929842	BLANCO MV	12P	31N	06VV	BGI	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #031	3003926279	BLANCO MV	17C	31N	05Vv	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #031A	3003926346	BLANCO MV BASIN DK /	171	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #031B	3003926579	BLANCO MV	171)	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #031C	3003926578	BLANCO MV /	17N	31N	05W	BG1	HDPE SECONDARY LINER
:OSA UNIT #032	3003925389	ROSA PC BLANCO MV /	2114	31N	06 V V	BG7	DBL WALL STEEL
OSA UNIT #032A	3003925417	ROSA PC BASIN DK /	21F	31N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
OSA UNIT #032B	3003926771	BLANCO MV BASIN DK /	21G	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #032C	3003927240	BI ANCO MV	216	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
DSA UNIT #034	3003907984	BLANCO MV	36B	32N	06W	BGT	HDPE SECONDARY LINER
OSA UNIT #034A	3003926119	BLANCO MV	361	32N	0GW	BGT	DBL WALL STEEL
)SA UNIT #034A	3003926119	BLANCO MV	361	32N	06W		DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
)SA UNIT #034E	3003926629	BLANCO MV	36J	32N	U6W		HDPE SECONDARY LINER

WELLS W/FEDERAL SURF MG1	API	FMT	SEC	TWN	RNG	PIT TYPE	CONSTRUCTION MATERIAL
							FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #034C	3003926969	BLANCO MV	36H	32N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #035X	3004510996	BI ANCO MV	5K	31N	U6VV	BG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20 mil
ROSA UNIT #036	3003907977	BI ANCO MV	1111	31N	06₩	BGT	HDPE SECONDARY LINER LIBERGLASS LANK WBANDED 20-mil
ROSA UNIT #0360	3003930182	BLANCO MV	11G	31N	(16W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDFD 20-mil
ROSA UNIT #041	3003907981	BLANCO MV BASIN DK /	5K	31N	05Vv	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #041B	3003927014	BI ANCO MV	6P	31N	0500	BG1	HDPE SECONDARY LINER
ROSA UNIT #044	3003925873	BI ANCO MV	35K	3211	06W	BGI	DBI WALL STEEL
ROSA UNIT #044A	3003926161	BI ANCO MV	35Ł	32N	06W	SG1	SINGLE WALL STEEL
ROSA UNIT #044A	3003926161	BI ANCO MV	35E	32N	06W	SGI	DBI WALL STEEL. FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #044B	3003926685	BLANCO MV	35C	32N	0674	BG1	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #045	3003923013	BLANCO MV BASIN DK /	9M	31N	()5W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #046A	3003926986	BLANCO MV	80	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #051	3003920289	BASIN DK	23C	31N	06W	BGT	DBL WALL STEEL FIBERGLASS TANK w/BANDFD 20-mil
ROSA UNIT #053	3003920293	BASIN DK	88	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #055	3003920923	BASIN DK	341	31N	05W	BGT	HDPE SECONDARY LINER
ROSA UNIT #059 DK	3003923270	BASIN DK	25N	31N	W80	BG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20 mil 1
!OSA UNIT #059 GI	3003923270	UNDES GL	25N	31N	06VV	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
'OSA UNIT #060	3004529798	BLANCO MV	41	31N	U6VV	BG1	HDPE SECONDARY LINER
OSA UNIT #064	3003921703	BASIN DK	29A	31N	05VV	BGT	DBI. WALL STEEL
OSA UNIT #064	3003921703	BASIN DK BASIN DK /	29A	31N	05W	SGI	DBI WALL STEEL
OSA UNIT #064M	3003925563	BLANCO MV	29F	31N	05W	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
DSA UNIT #065	3003921702	BASIN DK	17A	31N	U5VV		HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-nul
OSA UNIT #066	3003921758	BASIN DK BASIN DK /	13[31N	06W	BGI	HDPE SE CONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
OSA UNIT #066M	3003925747	BLANCO MV	13F	31N	06VV	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
)SA UNIT #072	3003925509	BLANCO MV	61	31N	()5VV	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
)SA UNIT #072A	3003925795	BLANCO MV	6K	31N	()5VV	BG1	HDPE SECONDARY LINER
)SA UNIT #075	3004529895	BLANCO MV	101	31N	()6W	BG1	FIBERGLASS TANK W/BANDED 20-mil HDPE SECONDARY LINER
SA UNIT #075A	3004529854	BLANCO MV	40	31N	06W	BGT	FIBERGLASS TANK WBANDED 20-mil HDPE SECONDARY LINER
SA UNIT #07 [±]	3003922538	DK/UNDES GL/BLANCO	33L	31N	05W		FIBERGLASS TANK W/BANDED 20-mil HDPE SECONDARY LINER

WELLS W/FEDERAL	ange ange a generale anne anne anne anne	-				and the state of t	artin of the transfer alternative statements and the statement of the stat
SURF MGT	API	BASIN DK /	SEC	TWN	RNG	PIT TYPE	CONSTRUCTION MATERIAL
ROSA UNIT #079	3003922539	BLANCO MV BASIN DK /	22K	31N	06W	BG1	DBL WALL STEEL
ROSA UNII #079	3003922539	BLANCO MV BLANCO MV /	22K	31N	06W	SGI	DBI WALL STEFI
ROSA UNIT #079A	3003925412	ROSA PC BASIN DK /	22F	31N	U6VV	BG1	DBI WALL STEFI
ROSA UNIT #079B	3003926920	BI ANCO MV	22C	31N	0674	BG1	DBI WALL STEEL
ROSA UNIT #079C	3003929902	BLANCO MV BASIN DK /	31P	31N	05W	BG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20-mil
ROSA UNII #080	3003922537	BLANCO MV	8K	31N	05Vv	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #080A	3003926413	BLANCO MV	86	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #085	3003922778	BASIN DK	20A	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #085	3003922778	BLANCO MV	20A	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #085A	3003926314	BLANCO MV	200	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #085B	3003930130	BLANCO MV	20D	31N	05W	BGT	DBI WALL STEEL
ROSA UNIT #086	3003922766	UNDES GI BLANCO MV /	12W	31N	04W	SG1	SINGLE WALL STEEL
ROSA UNIT #088	3004525140	ROSA PC	8F	31N	0674	BG1	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #089	3003922782	BLANCO MV	34A	3214	OGW	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil.
RUBUR TINI AROS	3003925512	BLANCO MV	34()	32N	06VV	BG1	HDPE SECONDARY LINER
ROSA UNIT #089B	300.3926851	BLANCO MV	341	32N	06W	BG1	DBI WALI STEEL
OSA UNIT #089C	3003926674	BLANCO MV	34G	3211	06W	SG1	SINGLE WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #090 COM	3004525370	BI ANCO MV	33G	3211	06VV	BGT	HDPE SECONDARY LINER
OSA UNIT #090A COM	3004529259	BLANCO MV	33G	3211	06W	BGI	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
190# FINU ASC	3003922780	BLANCO MV	3511	3214	UGVV	BG1	HDPE SECONDARY LINER
A160# TINU ASC	3003925790	BLANCO MV -	35O	32N	06VV	SGI	DBL WALL STEEL
DSA UNIT #091B	3003926684	BLANCO MV	35P	32N	06W		DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #091C	3003926991	BI.ANCO MV	35G	32N	06W		HDPE SECONDARY LINER FIBERGLASS TANK w/BANDED 20 mil
880# FINU A20	3003923265	BASIN DK / GI BASIN DK /	231.	31N	0677	BG1	HDPE SECONDARY LINER
SA UNI] #100B	3003929547	BLANCO MV	210	31N	06W	BG1	DBI. WALL STEEL
SA UNIT #100C	3003929851	BLANCO MV BLANCO MV /	21K	31N	06W	BGT	DBL WALL STEEL
SA UNIT #100E	3003925135	ROSA PC	211	31N	U6VV	SG1	SINGLE WALL STEEL
MIOI# TIMU AE	3003925577	BLANCO MV	24F	31N	06W		DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
SA UNIT #108	3003923506	BASIN DK / GI	7G	3111	05VV		HDPE SECONDARY LINER

,

WELLS W/FEDERAL SURF MG1	API	FMT	SEC	TWN	RNG	PIT TYPI	E CONSTRUCTION MATERIAL
ROSA UNIT #119	3003925143	BASIN DK	. 18N	31N	05\/v	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #125	3003925144	BLANCO MV	13B	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #1250	3003929843	BLANCO MV BASIN DK /	13G	3110	06W	BG1	DEL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #125E	3003925526	BI ANCO MV	13J	31N	06VV	BGI	HDPE SECONDARY LINER
ROSA UNIT #129	3003926304	BLANCO MV	34E	32N	06W	BG1	DBI WALL STEEL
! 'ROSA UNII #129A	3003926297	BI ANCO MV	34K	32N	(16W	BGT	DBI WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #137	3003925410	BLANCO MV BLANCO MV /	31K	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #137A	3003926129	ROSA PC	311	31N	05W	BG1	DBI WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #137B	3003927002	BLANCO MV /	31P	31N	()5W	BG1	HDPE SECONDARY LINER LIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #138	3004529147	ROSA PC BLANCO MV /	171	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #138A	3004529134	ROSA PC	17H	31N	06W	BG1	DBI WALL STEEL
ROSA UNIT #138B	3004532168	BI ANCO MV	1711	31N	06VV	BG1	DBI WALL STEEL
ROSA UNIT #139A	3004529600	BL ANCO MV	17M	31N	06W	BG1	DBI WALL STEEL
ROSA UNIT #140	3003925435	ROSA PC	22K	31N	06W	BG1	DBL WALL STEEL
COSA UNIT #144	3003925421	ROSA PC	26A	31N	0617	BG1	DBI WALL STEEL
OSA UNIT #145C	3004533086	BLANCO MV	16f	31N	06W	BG1	DBI WALL STEEL FIBERGLASS TANK WBANDED 20-mil
:OSA UNIT #146A	3003925513	BI ANCO MV	28N	31N	05W	BG1	HDPE SECONDARY LINER
OSA UNIT #146C	3003930187	BI ANCO MV	28B	31N	05W	BG1	UBI WALL STEEL
OSA UNIT #148	3003925493	BASIN DK	20	31N	06W	BĠī	DBI WALI STEEL
OSA UNIT #148A	3003925776	BI ANCO MV	2N	31N	06W	BG1	DBL WALL STEFL FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #148B	3003926985	BLANCO MV	2P	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
981# FINU ARC	3003925501	BI ANCO MV	12G	31N	06Vv	BG1	HDPE SECONDARY LINER
APPT# TINU AZC	3003925807	BLANCO MV BASIN DK /	12F	31N	UGVV	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
Beet# FINU ARC	3003926599	BLANCO MV	12E	31N	W8W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
)SA UNIT #150	3004529229	BLANCO MV	32F	32N	06W	BG1	HDPE SECONDARY LINER
SA UNIT #150A	3004529592	BLANCO MV	32M	32N	06٧٧	BG1	DBI WALL STEEL
)SA UNIT #150B	3004530874	BASIN DK / BLANCO MV	32D	3211	06W	BG1	DBL WALL STEEL
)SA UNIT #1500	3004532157	BI. ANCO MV	32K	32N	06W	BGT	DBI WALI STEEL
)SA UNIT #15	3004529267	BLANCO MV	33C	32N	06VV	BG1	DBL WALL STEEL

WELLS W/FEDERAL SURF MG1	API	FMT	SEC	TWN		PIT TYP	E CONSTRUCTION MATERIAL
ROSA UNIT #151A	3004529631	BLANCO MV	331	32N	06W	BGI	DBI WALL STEEL
ROSA UNIT #1510	3004532196	BI ANCO W/	33N	32N	06W	BGT	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #152	3003925494	BLANCO MV	36E	32N	U6W	BG1	HDPE SECONDARY LINER
ROSA UNIT #152A	3003925695	BLANCO MV	36N	3211	06VV	BGT	DBL WALL STEEL
ROSA UNIT #152B	3003926631	BI ANCO MV	36C	32N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #152C	3003927635	BI ANCO MV	361	32N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #153	3003925524	BI ANCO MV	170	31N	05W	BGI	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #153A	3003926329	BLANCO MV BASIN DK /	17A	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WIBANDED 20-mil
ROSA UNIT #153B	3003927603	BI ANCO MV	171	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #154	3003925893	BI ANCO MV	711	31N	05VV	BG1	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #154A	3003926274	BI ANCO MV	7P	3114	0574	BGI	HDPE SECONDARY LINER LIBERGLASS LANK W/BANDLD 20 mil
ROSA UNIT #150	3004529661	BLANCO MV	9A	3110	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #156A	3004529640	BLANCO MV BASIN DK /	91	31N	06VV	BGT	HDPE SECONDARY LINER
ROSA UNIT #159 COM	3003925583	BLANCO MV	190	31N	05W	BG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #159A	3003926273	BLANCÖ MV	19N	3111	05Vv	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #15C	3003930111	BLANCO MV /	29G	31N	05VV	BG1	HDPE SECONDARY LINER
ROSA UNIT #160	3003925890	ROSA PC	250	31N	06Vv	BG1	DBL WALL STEEL
ROSA UNIT #160A	3003925818	BLANCO MV BASIN DK /	25N	31N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20 mil
ROSA UNIT #160B	3003926962	BI.ANCO MV	251	31N	06W	BGT	HDPE SECONDARY LINER
ROSA UNIT #160C	3003929778	BLANCO MV	25J	31N	Wau	BG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #162	3003926069	BI ANCO MV	30K	31N	05W	BG1	HDPE SECONDARY LINER
ROSA UNIT #162B	3003929845	BI ANCO MV	30P	31N	05W	BGT	DBL WALL STEEL FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #163	3003926345	BI ANCO MV	24G	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #163A	3003926336	BLANCO MV	240	31N	06W	BG1	HDPF SECONDARY LINER
OSA UNIT #163B	3003929921	BLANCO MV	24B	31N	06W	SG1	DBI WALI. STEEL
DE61# TIMU ARC	3003929611	BLANCO MV BASIN DK /	243	31N	06W	SGT	SINGLE WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
DSA UIVIT #164	3003926151	BLANCO MV	1J	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
OSA UNIT #164A	3003926080	BLANCO MV BASIN DK /	1J	31N	06W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
DSA UNIT #164E	3003927242	BLANCO MV	1J	31N	06W		HDPE SECONDARY LINER

.

.

WELLS W/FEDERAL							
SURF MG1	API	FM1	SEC	NWT	RNG	PII TYP	E CONSTRUCTION MATERIAL
ROSA UNIT #165	3003926070	BLANCO MV / ROSA PC	251	31N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20 nul
ROSA UNIT #165A	3003926150	BLANCO MV BASIN DK /	25B	31N	06VV	BG1	HDPE SECONDARY LINER
ROSA UNIT #165B	3003926557	BLANCO MV BASIN DK /	25E	31N	06VV	BG1	DBI WALL STEFI
ROSA UNIT #1650	3003926961	BI ANCO MV	25G	31N	U6VV	BG1	DBI WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #166	3003926275	BLANCO MV	30A	31N	05VV	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20-mil
ROSA UNIT #166A	3003926282	BLANCO MV	30F	31N	05W	BGT	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
ROSA UNIT #167A	3004529886	BLANCO MV	A8	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNIT #169	3003926130	BLANCO MV	3J	31N	06W	BG1	DBI WALL STEEL
ROSA UNIT #169A	3003926149	BLANCO MV	3J	31N	06W	BGT	DBL WALL STEEL FIBERGLASS TANK w/BANDED 20-mil
ROSA UNIT #169C	3003927717	BI ANCO MV	2M	31N	06W	BG1	HDPE SECONDARY LINER
ROSA UNII #170	3003925851	BLANCO MV	21N	31N	06W	BG1	DBI WALL STEEL
ROSA UNII #171	3003926286	BLANCO MV	7G	31N	05W	BG1	DBI WALL STEEL FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #171A	3003926389	BLANCO MV	7G	31N	()5VV	BG1	HDPE SECONDARY LINER FIBERGI ASS TANK W/BANDED 20-mil
ROSA UNIT #171B	3003927013	BLANCO MV	6P	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20 mil
ROSA UNIT #180	3004529898	BI ANCO MV	9N	31N	06W	BGI	HDPE SECONDARY LINER
ROSA UNIT #180B	3004533134	BLANCO MV	91	31N	06W	BG1	DBI WALL STEEL
:OSA UNIT #180C	3004533191	BLANCO MV	9E	31N	06W	BG1	DBI WALL STEEL
OSA UNII #181	3003926463	BLANCO MV	11K	31N	06W	BG1	DBL WALL STEEL FIBERGLASS TANK WBANDED 20 mil
OSA UNIT #181A OSA UNIT #181C (shared	3003926312	BLANCO MV	15A	31N	06VV	BGT	HDPE SECONDARY LINER FIBERGLASS TANK WBANDED 20 mil
/169C)	3003927714	BLANCO MV	2M	31N	06W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #182	3003926283	BI ANCO MV	18N	31N	05W	BG1	HDPE SECONDARY LINER
OSA UNIT #182A	3003926285	BI ANCO MV	18F	31N	05W	BG1	DBI WALL STEEL
OSA UNIT #182C	3003930180	BI ANCO MV	18P	31N	05W	SGT	SINGLE WALL STEEL LIBERGLASS TANK W/BANDED 20-mil
OSA UNIT #183	3003926387	BLANCO MV	19G	31N	05W	BG1	HDPE SECONDARY LINER FIBERGLASS TANK W/BANDED 20-mil
)SA UNIT #183A	3003926386	BI ANCO MV	19F	31N	05W	BGT	HDPE SECONDARY LINER
)SA UNIT #183B	3003930087	BLANCO MV BASIN DK /	19B	31N	05W	BG1	DBI WALL STEEL
)SA UNIT #185B	3004532734	BLANCO MV	16F	31N	06W	BG1	DBI. WAILL STEEL
)SA UNIT #1850	3004534484	BLANCO MV	16F	31N	06W	BG1 ·	DBI WALL STEEL
SA UNII #18!	3003930186	BLANCO MV	21G	31N	05W	BGT	DBL WALL STEEL

SURF MG1	API	FMT	SEC	1WN	RNG	PIT TYPE	CONSTRUCTION MATERIAL
ROSA UNIT #231	3003924444	BASINFIC	31N	31N	05W	SGI	SINGLE WALL STEEL
ROSA UNIT #335A	3003930222	BASINFIC	<u>05J</u>	31N	05W	SG1	SINGLE WALL STEEL

,

••

Meador, Tasha

From: Meador, Tasha

Sent: Monday, May 17, 2010 10:31 AM

To: 'Jones, Brad A., EMNRD'

Cc: Sprague, Douglas; Lane, Myke; Powell, Brandon, EMNRD

Subject: Request for Review Pit Closure - Rosa 146A, Rosa 188, and Rosa 184

Brad:

We need to take the following below grade tanks out of service, and we would like to close these existing BGTs. We request your review and approval to allow closure.

WELLSITE	API	FMT	SEC	TWN	RNG
Rosa Unit #146A	3003927686	BLANCO MV	28D	31N	05 ['] W
Rosa Unit #188	3003926397	BLANCO MV	34K	31N	05W
Rosa Unit #184	3003926383	BLANCO MV	341	31N	05W

Please contact me or Myke Lane if there are any problems or you request additional information. Thanks for your consideration

Tasha Meador

EH&S Coordinator
Williams Exploration & Production

721 S Main Aztec, NM Office: 505-634-4200 Direct:505-634-4241 Fax: 505-634-4205

tasha.meador@williams.com

District I
1625 N French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

Form C-141

Revised October 10, 2003

Release Notification and Corrective Action

						OPERA	ΓOR		Initia	al Report		Final Report
Name of Co	mpany '	WILLIAMS	PRODU	CTION, LLC		Contact Vanessa Fields						
Address			40, AZTI	EC, NM 87410		Telephone No. (505) 634-4209						
Facility Nar	ne Rosa U	nit #188		· · · · · · · · · · · · · · · · · · ·		Facility Typ	e Well Site			····		
Surface Ow	ner Federa	ıl		Mineral C)wner	tr Lease No.						
				LOCA	ATIO	N OF REI	LEASE					
Unit Letter	Section	Township	Range	Feet from the	North	/South Line	Feet from the	East/We	st Line	County		
K	34 31N 05W									:		
			Latitu	ide_36.8545297	7	Longitude	-107.35276			·		
				NAT	URE	OF RELI	EASE					
Type of Relea	ase No Rele	ease Detected					Release NA	Ì	/olume F	Recovered N	A	
Source of Re							our of Occurrenc	e I	Date and	Hour of Dis	covery	NA
Was Immedia	ite Notice (Yes	No 🛛 Not Re	equired	If YES, To NA	Whom?					
By Whom?						Date and H						
Was a Watero	course Read	hed?	Yes 🛚	No		If YES, Vo	lume Impacting t	he Waterc	ourse.			
1C W.		pacted, Descri										
NA												
Describe Cau	se of Proble	em and Remed	dial Action	Taken.*								
NA												
	Affected a	and Cleanup A	Action Tak	en.*								
NA												
regulations al public health should their o or the environ	l operators or the envir perations h ment. In a	are required to conment. The ave failed to a	report an acceptanc dequately CD accep	d/or file certain re e of a C-141 repo investigate and re	elease no ort by the emediate	otifications and NMOCD made contamination	knowledge and und perform correct arked as "Final Reform that pose a three the operator of r	tive action eport" doe: eat to grou	s for rele s not reli nd water	eases which eve the oper , surface wa	may er ator of ter, hu	ndanger Tiability man health
Signature:	h	oss	X				OIL CONS	SERVA	TION	DIVISIC	N	
Printed Name						Approved by	District Superviso	or:				
Title: EH&S	Coordinato	or				Approval Date:			Expiration Date:			
E-mail Addre		a.fields@willi	ams.com			Conditions of Approval:			Attached			
Date: 10-1 Attach Addit		ets If Necessa		ne: (505) 634-42	.09					<u></u>		

Meador, Tasha

From: Meador, Tasha

Sent: Monday, May 17, 2010 10:31 AM

To: 'Jones, Brad A., EMNRD'

Cc: Sprague, Douglas; Lane, Myke; Powell, Brandon, EMNRD

Subject: Request for Review Pit Closure - Rosa 146A, Rosa 188, and Rosa 184

Brad:

We need to take the following below grade tanks out of service, and we would like to close these existing BGTs. We request your review and approval to allow closure.

WELLSITE	API	FMT	SEC	TWN	RNG
Rosa Unit #146A	3003927686	BLANCO MV	28D	31N	05W
Rosa Unit #188	3003926397	BLANCO MV	34K	31N	05W
Rosa Unit #184	3003926383	BLANCO MV	341	31N	05W

Please contact me or Myke Lane if there are any problems or you request additional information. Thanks for your consideration

Tasha Meador

EH&S Coordinator
Williams Exploration & Production

721 S Main Aztec, NM Office: 505-634-4200 Direct:505-634-4241 Fax: 505-634-4205

tasha.meador@williams.com

Williams Production Co., LLC San Juan Basin: New Mexico Assets

Below-Grade Tank Removal Closure Plan

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general closure requirements of below-grade tanks (BGT) on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard closure procedure for all BGTs regulated under Rule 19.15.17 NMAC and operated by WPX. For those closures which do not conform to this standard closure plan, a separate well/pit specific closure plan will be developed and utilized.

Closure Conditions and Timing:

Pursuant to 19.15.17.13 (A) NMAC, WPX will initiate closure of any BGT should any one of these conditions occur:

- The Division requires closure because of imminent danger to fresh water, public health or the environment.
- The integrity of the BGT fails. Notification will be within 48 hours to the Division and closure will be schedule as specified in 19.15.17.12 (A)(5) NMAC.
- WPX chooses to take the BGT out-of-service due to operational needs. Closure
 under these conditions will be closed within 60 days of cessation of the BGT's
 operation.
- BGTs installed prior to June 16, 2008 that do not meet the requirements under 19.15.17.11.1(6) NMAC and WPX chooses not to retrofit or upgrade. Closure under these conditions will be completed within five years (by June 16, 2013).

General Plan Requirements:

- 1. Prior to initiating any BGT Closure except in the case of an emergency, WPX will review County Tax Records for the current surface owner of record. The surface owner of record will be notified of the intent to closure the BGT by certified mail and a copy of this notification will be included in the closure report. In the case of an emergency, the surface owner of record will be notified as soon as practical.
- 2. Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)
- 3. All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks, temporary frac tank, ...). The well will be temporarily shutin until the rerouting is completed.
- 4. All produced water will be removed from the BGT following discharge-pipe rerouting. Produced water will be disposed at one of the following NMOCD approved facilities depending on the proximity of the BGT site: Rosa Unit SWD #1 (Order: SWD-916, API: 30-039-27055), Rosa Unit #94 (Order: SWD-3RP-1003-0, API: 30-039-23035), Jillson Fed. SWD #001 (Order: R10168/R10168A, API: 30-039-25465), Middle Mesa SWD #001 (Order: SWD-350-0, API: 30-045-27004) and/or Basin Disposal (Permit: NM-01-0005).
- 5. Solids and sludges will be shoveled and /or vacuumed out for disposal at Envirotech (Permit Number NM-01-0011).
- 6. WPX will obtain prior approval from NMOCD to dispose, recycle, reuse, or reclaim the BGT and provide documentation of the disposition of the BGT in the closure report. Steel materials will be recycled or reused as approved by the Division. Fiberglass tanks will be empty, cut up or shredded, and EPA cleaned for disposal as solid waste. Liners materials will be cleaned without soils or contaminated material for disposal as

solid waste. Fiberglass tanks and liner materials will meet the conditions of paragraph 1 subsection D of 19.15.9.712 NMAC. Disposal will be at a licensed disposal facility, presently San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426.

- 7. Any equipment associated with the BGT that is no longer required for some other purpose, following the closure will be removed from the location.
- 8. Following removal of the tank and any liner material, a five-point composite sample will be taken of the excavation and tested per 19.15.17.13(E)(4) NMAC as identified in Table 1. Grab samples will be collected from any area that is wet, discolored or showing other evidence of a release. Results will be report to the Division following receipt from the lab on Form C-141.

Table 1: Closure Criteria for BGTs

-Components	Testing Methods	Closure Limits (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	EPA SW-846 Method 418.1(1)	100
Chlorides	EPA SW-846 Method 300.1(1)	250(2)

⁽¹⁾ Method modified for solid waste.

- 9. If the Division and/or WPX determine there is a release, WPX will comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC.
- 10. Upon completion of the tank removal, the excavation will be backfilled with non-waste earthen material compacted and covered with a minimum of one foot of top soil or background thickness whichever is greater and to existing grade. The surface will be recontoured to match the native grade and prevent ponding.
- 11. For those portions of the former pit area no longer required for production activities, WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: If a surface owner agreement requires reseeding or other surface restoration that do not meet the revegetation requirements of 19.15.17.13.I NMAC then WPX will submit the proposed alternative with written documentation that the surface owner agrees to the alternative, for Division approval.
- 12. For those portions of the former pit area required for production activities, reseeding will be done at well abandonment, and following the procedure noted above.

Closure Report:

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the BGT closure on a Closure Report using Division Form C-144. The Report will include the following:

- Proof of Closure Notice (surface owner & NMOCD)
- Backfilling & Cover Installation
- Site Diagram with coordinates
- Available Inspection reports
- Confirmation Sampling Analytical Results
- Disposal Facility Name(s) and Permit Number(s)
- Application Rate & Seeding techniques
- Photo Documentation of Reclamation

 $^{^{(2)}}$ If background concentration of Chlorides greater than 250 mg/Kg, then higher concentration will be used for closure.

Williams Production Co., LLC San Juan Basin: New Mexico Assets

Production Pit: Fiberglass Below-Grade Tank

Although these tanks have performed well to protect the public health, welfare and environment, in accordance with Rule 19.15.17.13.A (4) NMAC, Williams will removed all BGTs constructed of fiberglass by June 16, 2013. These tanks do not meet the construction/design standards specified in 19.15.17.11 (1-4). The following plans describes the general design and construction (D&C) and Operations and Maintenance (O&M)of these production pits used on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico.

Design and Construction Plan

The pit is located as close as possible to the well and associated production/process equipment to minimize surface disturbance. The excavation bottom and sidewalls were compacted prior to installation of the pit. The BGT consisted of single-wall fiberglass tank following appropriate API and industry codes, placed in a 20-mil High-Strength Polyethylene resin (Permeability Rating – 0.041 USPerms), and the liner banded to the tanks. A 2" Sch-40 PVC riser was placed between the tank and liner as a leak-detection inspection port. See the attached Schematic and liner spec sheet. The pit is protected from runon by the construction of a compacted earthen berm. Fencing is constructed to protect livestock/wildlife as specified by the federal Surface Management Agency or, if not federal land/minerals requirements. WPX posts a well sign in accordance with the federal Surface Management Agency and rule 19.15.3.103.

Operations and Maintenance Plan

- 1. WPX only allows produced liquids meeting the RCRA exemption for O&G wastes to be stored in the SGT. WPX will not discharge or store any hazardous waste as defined under RCRA 40CFR 261 and 19.15.1.7.W(3) NMAC in any temporary pit. Produced water is disposed by evaporation or transport any of the following NMOCD approved facilities depending on the well location: Basin Disposal, Inc in Bloomfield, New Mexico (Permit # NM-01-005), Williams Rosa SWD#1 (Permit # SWD-916), Williams Rosa #94 (Permit # SWD-758), Burlington Resources Jillson SWD#1 (Permit #R10168A), or other NMOCD approved water disposal facilities. WPX maintains sufficient freeboard for to prevent overtopping. Discharges to the pit will be shutoff if the liquid level does not provided sufficient free-board and liquid removal can not be scheduled in a timely manner. Any oil or hydrocarbon collecting on the pit is removed. Saleable condensate is returned to the sales tank. Slop oil from compression is recycled with Safety Kleen, Farmington, NM or Hydropure, Aztec, NM (No Permit Required).
- 2. If the tank integrity is compromised:
 - a. All discharges will be shut off to the pit.
 - b. All liquids will be removed as soon as possible but no more that within 24 hours of discovery
 - c. WPX will notify and report to NMOCD as follows:
 - i. If the release is less than 25 bbls, the Aztec District Office by phone or email within 48-hours of discovery and repair.
 - ii. If the release is suspected to be greater than 25 bbls, the Aztec District Office and the Environmental Bureau Chief by phone for immediate verbal notification pursuant to 19.15.3.116.B (1)(d).
 - d. Written Spill/Release reports will be submitted on Form C-141 per 19.15.3.116.C NMAC within 15 days to the Aztec District Office.
- 3. Berms around the perimeter of the pit, shall be maintained as protection from run-on.
- 4. WPX will inspect the BGT pit monthly. Electronic copies of the inspections will be kept at the WPX San Juan Basin office for a minimum of five years following completion. Copies of the inspections will be available to NMOCD upon request.

Williams Production Co., LLC San Juan Basin: New Mexico Assets

Production Pit: Below-Grade Tank
Closure Plan

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general closure requirements of below-grade tanks (BGT) on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all out-of-service BGTs used to store produced liquids during production operations at gas wells operated by WPX.

For those closures which do not conform to this standard closure plan, a separate well/pit specific closure plan will be developed and utilized. All closure activities will include proper documentation and will be submitted to OCD within 60 days of the pit closure on a Closure Report using Division Form C-144. The Report will include the following:

- Plot Plan (Pit Diagram)
- Available Inspection reports

- Sampling Results
- Waste disposal documentation

General Plan Requirements:


- 1. All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks, temporary frac tank ...). The well will be temporarily shut in until the rerouting is completed.
- 2. All produced water will be removed from the BGT following discharge-pipe rerouting. Produced water will be disposed of by injection at one of the Williams Production Rosa Unit Salt Water Disposal wells: Rosa SWD #1 (API: 30-039-27055) I-23-31N-06W Permit SWD-916 or Rosa Unit #94 (API: 30-039-23035) K-16-31N-05W, Permit SWD-758.
- 3. Notice of Closure will be given to the landowner or SMA, and the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)
- 4. The BGT and all associated materials will be removed, and recycled, reused, or disposed, of in a Division-approved facility. All materials that can not be recycled or reused will be treated a solid waste and will be disposed of at a licensed disposal facility (probably San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426).
- 5. Following removal of the tank and any liner material, a five-point composite sample will be taken of the excavation and tested per 19.15.17.13(B)(1)(b) NMAC. In the event that the criteria are not met (See Table 1), a release will be reported following Rule 116 and impacted soils will be excavated and hauled to Envirotech Landfarm near Bloomfield, NM (NMOCD Permit NM-01-0011). Approval to haul will be requested of the Aztec District office prior to initiation.


Table 1: Closure Criteria for BGTs

	Table 11 Greene Ciliona for DC	
Components	Testing Methods	Closure Limits (mg//kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	EPA SW-846 Method 8015 M(Full Range)*	100
	or Method 418.1	
Chlorides	EPA SW-846 Method 300.1	250


^{*} Preferred method

- 6. Upon completion of the tank removal and any necessary soil remediation, the excavation will be backfilled with non-waste earthen material compacted to native and covered with a minimum of one foot of top soil. The surface will be re-contoured to match the native grade.
- 7. For those portions of the former pit area no longer required for production activities, WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations including mix and seeding methods specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) or Land owner as part of a surface use agreement or APD are Division-approved methods unless notified by the Division of their unacceptability.
- 8. For those portions of the former pit area required for production activities, re-seeding will be done at well abandonment, and following the procedure noted above.

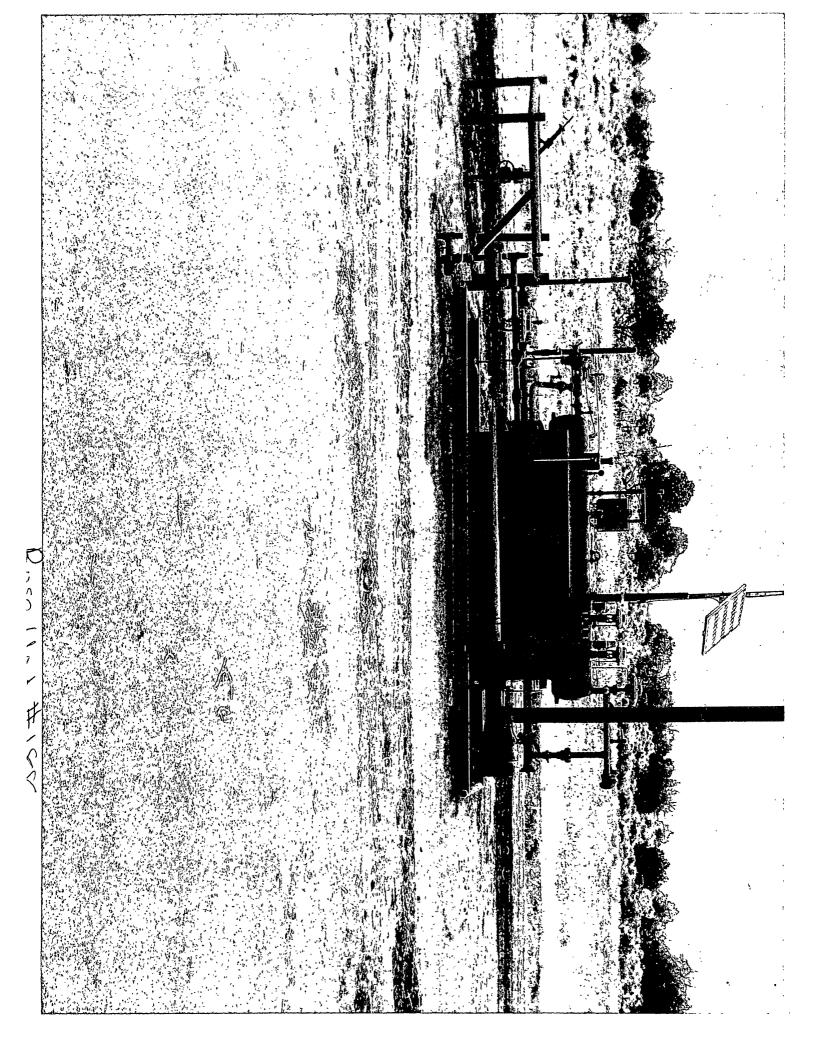

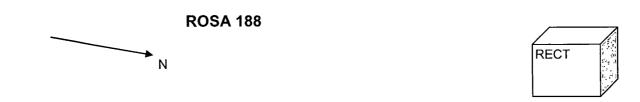



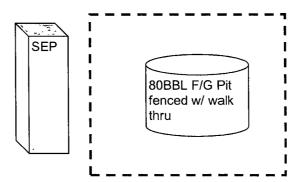

ROAD

						Liner	Lea	k detecti	Pit	
Date	WellName	Run	Formation	Construction	SGT. BGT, Above	Plastic liner, Double Wall Steel, Bottom Plastic Liner	Y/N	level	level	Comments / Repairs needed
8/4/2008	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT					
1/10/2009	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	1	16	
Mar-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	21	
Apr-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	1	8	
May-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	n/a	16	
Jun-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	36	_
Jul-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	24	
Aug-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	37	
Oct-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	3	
Nov-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0_	16	
Dec-09	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0_	16	
Jan-10	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	8	

04-55

					•	Liner	Lea	k detecti	Pit	
Date	WellName	Run	Formation	Construction	SGT. BGT, Above	Plastic liner, Double Wall Steel, Bottom Plastic Liner	Y/N	level	level	Comments / Repairs needed
Feb-10	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	11	
Mar-10	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	30	48	will have pit tested
Apr-10	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES			
May-10	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	1	29	
Jun-10	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	36	
Jul-10	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES	0	43	
Aug-10	ROSA UNIT #188	04-55	Mesa Verde	FIBERGLASS	BGT	NO	YES			



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	Williams	Project #:	04108-0136
Sample ID:	Rosa 188	Date Reported:	07-30-10
Laboratory Number:	55363	Date Sampled:	07-27-10
Chain of Custody No:	9849	Date Received:	07-29-10
Sample Matrix:	Soil	Date Extracted:	07-29-10
Preservative:		Date Analyzed:	07-29-10
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Rosa 188 BGT

Analyst

Revie

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc.com envirotech-inc.com



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client:	QA/QC		Project #:		N/A
Sample ID:	07-29-10 QA/Q	С	Date Reported:		07-30-10
Laboratory Number:	55357		Date Sampled:		N/A
Sample Matrix:	Methylene Chlorid	de	Date Received:		N/A
Preservative:	N/A		Date Analyzed:		07-29-10
Condition:	N/A		Analysis Reque	ested:	TPH
	I-Cal Date	I-Cal RF:	C-Cal RF:	% Difference	Accept. Range
Gasoline Range C5 - C10	05-07-07	9.9960E+002	1.0000E+003	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	9.9960E+002	1.0000E+003	0.04%	0 - 15%
to the same of	s gran gran .	and the second of the second	*		
Blank Conc. (mg/L - mg/Kg)		Concentration		Detection Limit	•
Gasoline Range C5 - C10		ND		0.2	
Diesel Range C10 - C28		ND		0.1	
Total Petroleum Hydrocarbons		ND		0.2	
Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept. Range	
Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%	
Diesel Range C10 - C28	ND	ND	0.0%	0 - 30%	
Spike Conc. (mg/Kg)	Sample %	Spike Added	Spike Résult	% Recovery	Accept: Range
Gasoline Range C5 - C10	ND	250	250	99.8%	75 - 125%
Diesel Range C10 - C28	ND	250	262	105%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 55357-55365

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	Williams	Project #:	04108-0136
Sample ID:	Rosa 188	Date Reported:	07-30-10
Laboratory Number:	55363	Date Sampled:	07-27-10
Chain of Custody:	9849	Date Received:	07-29-10
Sample Matrix:	Soil	Date Analyzed:	07-29-10
Preservative:		Date Extracted:	07-29-10
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	ND	0.9	
Toluene	ND	1.0	
Ethylbenzene	ND	1,0	
p,m-Xylene	ND	1.2	
o-Xylene	ND	0.9	
Total BTEX	ND		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	102 %
	1,4-difluorobenzene	103 %
	Bromochlorobenzene	100 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Rosa 188 BGT

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

	N/A		Project #:		N/A
Sample ID:	0730BBLK QA/QC	•			
Laboratory Number:	55357			N/A	
Sample Matrix:	Soil		Date Received:		N/A
Preservative:	N/A		Date Analyzed:		07-29-10
Condition:	N/A		Analysis:		BTEX
Calibration and	I-Cal RF:	C-Cal RF:	%Diff.	Blank	Detect.
Detection Limits (ug/L)	· ·	Accept. Rar	ige 0 - 15%	Conc	Limit
Benzene	1.0597E+006	1.0619E+006	0.2%	ND	0.1
Toluene	1.1590E+006	1.1613E+006	0.2%	ND	0.1
Ethylbenzene	1.0413E+006	1.0433E+006	0.2%	ND	0.1
p,m-Xylene	2.6113E+006	2.6165E+006	0.2%	ND	0.1
o-Xylene	9.5705E+005	9.5897E+005	0.2%	ND	0.1
Düplicate Conc. (ug/Kg)	Sample	Duplicate	%Diff.	Accept Range	Detect. Limit
Benzene	1.3	1.1	15.4%	0 - 30%	0.9
Toluene	16.4	16.8	2.4%	0 - 30%	1.0
Ethylbenzene	1.5	1.2	20.0%	0 - 30%	1.0
p,m-Xylene	13.1	12.6	3.8%	0 - 30%	1.2
o-Xylene	4.7	4.7	0.0%	0 - 30%	0.9
o-Xylene Spike Conc. (ug/Kg)		4.7 Amount Spiked		0 - 30% % Řecovery	0.9 Accept Range
·					
Spike Conc. (ug/Kg) Benzene	Sample	Amount Spiked	Spiked Sample	% Recovery	Accept Range
Spike Conc. (ug/Kg) Benzene Toluene	Sample 1.3	Amount Spiked 50.0	Spiked Sample 50.6	% Recovery	Accept Range
Spike Conc. (ug/Kg)	Sample 1.3 16.4	Amount Spiked 50.0 50.0	Spiked Sample 50.6 51.1	% Recovery 101% 98.9%	Accept Range 39 - 150 46 - 148

ND - Parameter not detected at the stated detection limit.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments:

QA/QC for Samples 55357-55365

Analyst

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc.com envirotech-inc.com



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	Williams	Project #:	04108-0136
Sample ID:	Rosa 188	Date Reported:	07-30-10
Laboratory Number:	55363	Date Sampled:	07-27-10
Chain of Custody No:	9849	Date Received:	07-29-10
Sample Matrix:	Soil	Date Extracted:	07-30-10
Preservative:		Date Analyzed:	07-30-10
Condition:	Intact	Analysis Needed:	TPH-418.1

	7.7 Mark and 1 and	Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

40.2

10.4

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Rosa 188 BGT

Analyst

Review



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

ı

Client:	QA/QC	Project #:	N/A
Sample ID:	QA/QC	Date Reported:	07-30-10
Laboratory Number:	07-30-TPH.QA/QC 55361	Date Sampled:	N/A
Sample Matrix:	Freon-113	Date Analyzed:	07-30-10
Preservative:	N/A	Date Extracted:	07-30-10
Condition:	N/A	Analysis Needed:	TPH

Calibration	I-Cal Date	C-Cal Date	I-Cal RF:	C-Cal RF:	% Difference	Accept. Range
	07-29-10	07-30-10	1,860	1,770	4.8%	+/- 10%

Blank Conc. (mg/Kg) TPH		Concentration ND		Detection Lim 10.4	nit
Duplicate Conc. (mg/Kg) TPH		Sample 77.4	Duplicate 76.7	% Difference 0.9%	Accept. Range
Spike Conc. (mg/Kg) TPH	Sample 77.4	Spike Added 2,000	Spike Result 1,860	% Recovery 89.5%	Accept Range 80 - 120%

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments: QA/QC for Samples 55357-55364

Analyst MONPOOL

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc.com envirotech-inc.com



Chloride

Parameter	·	Concentration (mg	nż
Condition:	Intact	Chain of Custody:	9849
Preservative:		Date Analyzed:	07-30-10
Sample Matrix:	Soil	Date Received:	07-29-10
Lab ID#:	55363	Date Sampled:	07-27-10
Sample ID:	Rosa 188	Date Reported:	07-30-10
Client:	Williams	Project #:	04108-0136

Total Chloride

15

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Rosa 188 BGT

CHAIN OF CUSTODY RECORD

Client: Project Name / Location: Williams Rosa 188 Bet					ANALYSIS / PARAMETERS																	
Williams Client Address:			iampler Name:	181	s Dei	.l			X	<u> </u>	Ι		1		·	ı	K	K				\dashv
721 S. Ma	<u> </u>	6	lampier Name:	N/1 c	04.0				TPH (Method 8015)	BTEX (Method 8021)	VOC (Method 8260)						·					
Client Phone No.:	<u>un</u>	<u>\\</u>	Slient No(:)	SIX (C	ingue	•) 8 0 0	boc	od 8	stals	آو م		₽ F						-	듗
l.			04108-0136				letho	Meti	leth.	8 Me	/ An		i ş		<u>6</u>	CHLORIDE		1	Sample Cool	Sample Intact		
D34-4241. Sample No./	Sample	Sample	Sample No./Volume			Pres	ervative	_ <u>}</u>	EX	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	8	RCRA 8 Metals	RCRA 8 Metal Cation / Anion	_	TCLP with H/P		TPH (418.1)	10			ᇤ	mple
Identification	Date	Time	Lab No.		Matrix	of Containers	HgCl ₂	HCt	르	BT	8	윤	S	교	2	PAH		동			Sal	Sal
Rosa 188	Tlaylo	11:00	55343	Soil ² Solid	Sludge Aqueous	1/402			\chi	X							X	X			N	4
				Soil Solid	Sludge Aqueous	. 0																
				Soil Solid	Sludge Aqueous																	
				Soil Solid	Sludge Aqueous																	
				Soil Solid	Sludge Aqueous																	
				Soil Solid	Sludge Aqueous																	
***************************************				Soil Solid	Sludge Aqueous																	
				Soil Solid	Sludge Aqueous																	
		-		Soll Solid	Sludge Aqueous							-										
				Soil Solid	Sludge Aqueous																	
Relinquished by: (Signature)			n Date 1/29/10	Time 1:45			eceived by: (Signature) Date 7/24/10 1:45															
Relinquished by: (Sign	ature)	l				•	F	Receiv	ed by:	(Sigr	ature)										
Relinquished by: (Sign	ature)		 				F	Receiv	ed by:	(Sigr	nature)								•		
			5796 []	S Highwa	ay 64 • Farmir		aly	/tico	ıl La	bor	ator	У	ch-inc	com					 <u>l</u>			

Williams Production Co., LLC San Juan Basin: New Mexico Assets

Below-Grade Tank Removal Closure Report

> Well: API No:

OIL CONS. DIV. DIST. 3 (Rosa Unit# 188) 30-03926397 Location: K-S34-T31N-R05W, NMPM

In accordance with Rule 19.15.17.13 NMAC, the following report describes the general closure of the referenced below-grade tanks (BGT) on Williams Production Co, LLC (WPX) location in the San Juan Basin of New Mexico. The closure follows this WPX's standard closure procedure for all BGTs regulated under Rule 19.15.17 NMAC and operated by WPX. For those closures which do not conform to the standard closure plan, a separate well/pit specific closure plan will be developed and utilized.

Closure Conditions and Timing:

Pursuant to 19.15.17.13 (A) NMAC, WPX will initiate closure of any BGT should any one of these conditions occur:

- The Division requires closure because of imminent danger to fresh water, public health or the environment.
- The integrity of the BGT fails. Notification will be within 48 hours to the Division and closure will be schedule as specified in 19.15.17.12 (A) (5) NMAC.
- WPX chooses to take the BGT out-of-service due to operational needs. Closure under these conditions will be initiated within 60 days of cessation of the BGT's operation.
- BGTs installed prior to June 16, 2008 that do not meet the requirements under 19.15.17.11.1(6) NMAC and WPX chooses not to retrofit or upgrade. Closure under these conditions will be completed within five years (by June 16, 2013).

General Plan Requirements:

1. Prior to initiating any BGT Closure except in the case of an emergency, WPX will review County Tax Records for the current landowner of record. The landowner of record will be notified of the intent to closure the BGT by certified mail and a copy of this notification will be included in the closure report. In the case of an emergency, the landowner of record will be notified as soon as practical.

Williams notified the SMA of its intent to clean close the BGT via Certified Mail on March 10, 2009 see attached. No return receipt required per BLM:FFO/NMOCD MOU dated 5/4/09.

- 2. Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the followina:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)

Aztec District office was notified of Williams E&P intent to close on (05/17/2010). Email attached.

3. All piping will be rerouted to an alternative produced water storage/disposal location (e.g. surface tanks, temporary frac tank, ...). The well will be temporarily shut-in until the rerouting is completed.

Williams closed the BGT used by the Rosa Unit# 188 separator and piped all liquids to the Produced Water Storage Tank.

4. All produced water will be removed from the BGT following discharge-pipe rerouting. Produced water will be disposed at one of the following NMOCD approved facilities depending on the proximity of the BGT site: Rosa Unit SWD #1 (Order: SWD-916, API: 30-039-27055), Rosa Unit #94 (Order: SWD-3RP-1003-0, API: 30-039-23035), Jillson Fed. SWD #001 (Order: R10168/R10168A, API: 30-039-25465), Middle Mesa SWD #001 (Order: SWD-350-0, API: 30-045-27004) and/or Basin Disposal (Permit: NM-01-0005).

<u>Produced water in the BGT prior to closures was removed by vacuum truck and hauled</u> to the Rosa <u>Unit disposal wells listed.</u>

5. Solids and sludges will be shoveled and /or vacuumed out for disposal at Envirotech (Permit Number NM-01-0011).

No solids or sludge required removal prior to excavation and removal of the tank.

6. Williams will obtain prior approval from NMOCD to dispose, recycle, reuse, or reclaim the BGT and provide documentation of the disposition of the BGT in the closure report. Steel materials will be recycled or reused as approved by the Division. Fiberglass tanks will be empty, cut up or shredded, and EPA cleaned for disposal as solid waste. Liners materials will be cleaned without soils or contaminated material for disposal as solid waste. Fiberglass tanks and liner materials will meet the conditions of paragraph 1 subsection D or 19.15.9.712 NMAC. Disposal will be at a licensed disposal facility, presently San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426.

The fiberglass tank and plastic liner was disposed of at the San Juan Regional Landfill.

- 7. Any equipment associated with the BGT that is no longer required for some other purpose, following the closure will be removed from the location.

 The fiberglass tank and plastic liner were removed offsite. All other piping and equipment remains in use. See attached photo.
- 8. Following removal of the tank and any liner material, a five-point composite sample will be taken of the excavation and tested per 19.15.17.13(E)(4) NMAC as identified in Table 1. Grab samples will be collected from any area that is wet, discolored or showing other evidence of a release. Results will be report to the Division following receipt from the lab on Form C-141.

Components	Testing Methods	Closure Limits (mg/Kg)	Sample Results (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2	ND
BTEX	EPA SW-846 Method 8021B or 8260B	50	ND
TPH	EPA SW-846 Method 418.1(1)	100	40.2
Chlorides	EPA SW-846 Method 300.1(1)	250(2)	ND

Table 1: Closure Criteria for BGTs

- (1) Method modified for solid waste.
- $^{(2)}$ If background concentration of Chlorides greater than 250 mg/Kg, then higher concentration will be used for closure.
- 9. If the Division and/or Williams determine there is a release, Williams will comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC.

No release detected.

10. Upon completion of the tank removal, and any necessary soil remediation, the excavation will be backfilled with non-waste earthen material compacted to native and covered with a minimum of one foot of top soil or background thickness. The surface will be recontoured to match the native grade.

<u>Pit area backfilled with clean earthen material following sample results. No contaminated soil taken off site.</u> Backfill compacted to avoid settling and pit area remains in use for production operations.

Form C-144 Rosa Unit# 188 Oil Conservation Division Page 2 of 3 470

11. For those portions of the former pit area no longer required for production activities, WPX will seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations including mix and seeding methods specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) APD are Division-approved methods unless notified by the Division of their unacceptability. If a landowner agreement requires reseeding or other surface restoration that does not meet the revegetation requirements of 19.15.17.13., I then WPX will submit the proposed alternative with written documentation that the landowner agrees to the alternative, for Division approval.

<u>Pit area along with unused portions of well pad interim reclaimed and following P&A entire location to be reclaimed and recontoured in accordance with Surface Management Agency requirements in APD-COAs and per BLM:FFO/NMOCD MOU dated 5/4/09.</u>

12. For those portions of the former pit area required for production activities, reseeding will be done at well abandonment, and following the procedure noted above. See above notes.

Closure Report:

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the BGT closure on a Closure Report using Division Form C-144. The Report will include the following:

- Proof of Closure Notice (surface owner & NMOCD)
- Backfilling & Cover Installation
- Site Diagram with coordinates
- Available Inspection reports

- Confirmation Sampling Analytical Results
- Disposal Facility Name(s) and Permit Number(s)
- Re-vegetation Application Rate & Seeding techniques
- Photo Documentation of Reclamation