

RECEIVED

Form 3160-3
(April 2004)

JAN 26 2011

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NM-019411	
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator Dugan Production Corp.		7. If Unit or CA Agreement, Name and No. NMNM 110404	
3a. Address 709 East Murray Drive Farmington, NM 87401		8. Lease Name and Well No. Federal B Com #91	
3b. Phone No. (include area code) 505-325-1821		9. API Well No. 30-045-35232	
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface 1355' FSL & 2040' FWL Lat: 36.76530 N Long: 108.03383 W At proposed prod. zone Same as above		10. Field and Pool, or Exploratory Basin Fruitland Coal	
11. Sec., T. R. M. or Blk. and Survey or Area K Sec. 31, T30N, R11W NMMPM		12. County or Parish San Juan	
13. State NM		14. Distance in miles and direction from nearest town or post office Approx. 5-Miles South of Aztec, New Mexico	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any) 1340-Feet		16. No. of acres in lease 155.4 Acres	
17. Spacing Unit dedicated to this well 334.43 Acres (W/2)		18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 500-ft.	
19. Proposed Depth 2200-Feet		20. BLM/BIA Bond No. On File	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) GL-5871'		22. Approximate date work will start ASAP	
23. Estimated duration 5-Days		24. Attachments	

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature <i>Kurt Fagrelus</i>	Name (Printed/Typed) Kurt Fagrelus	Date 1/17/2011
Title Geologist		
Approved by (Signature) <i>D. Montie</i>	Name (Printed/Typed) AFM	Date 9/13/11
Title AFM	Office FEO	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.



H₂S POTENTIAL EXIST

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

**NOTIFY AZTEC OCD 24 HRS.
PRIOR TO CASING & CEMENT**

A water based gel-mud will be used to drill surface and production casing hole.

Standard 2,000 psi BOP will be used to drill production hole. The Fruitland

Coal will be perforated from approximately 2015 - 2030 feet. The interval

will be fracture stimulated.


BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

SEP 28 2011

NMOC

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".



District I
1625 N. French Dr., Hobbs, NM 88240

District II
1391 W. Grand Avenue, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

RECEIVED
JAN 26 2011

Farmington Field Office
Bureau of Land Management

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number 30-045-35232	*Pool Code 71629	*Pool Name BASIN FRUITLAND COAL
*Property Code 32170	*Property Name FEDERAL B COM	*Well Number 91
*GRID No. 006515	*Operator Name DUGAN PRODUCTION CORPORATION	*Elevation 5871'

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	31	30N	11W	13	1355	SOUTH	2040	WEST	SAN JUAN


11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

12 Dedicated Acres 334.43 Acres - W/2	13 Joint or Infill	14 Consolidation Code	15 Order No.
---	--------------------	-----------------------	--------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16

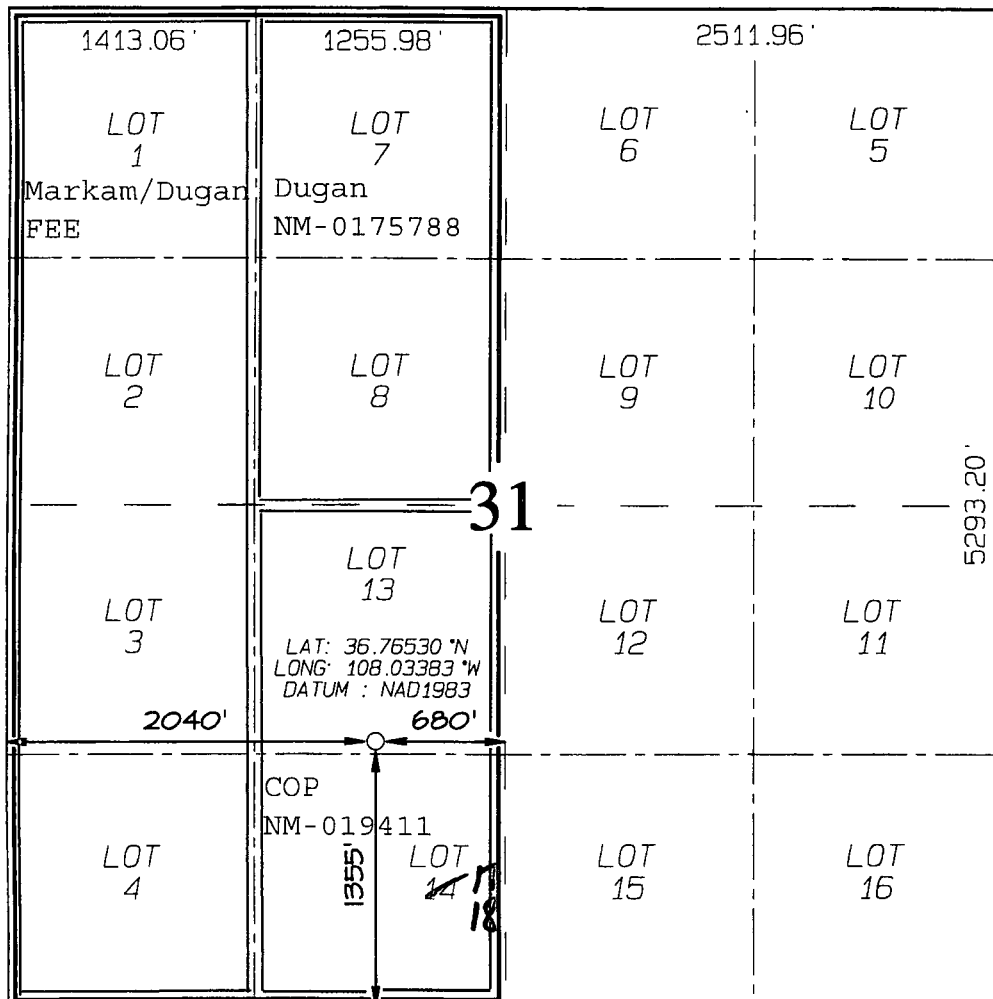

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division

Kurt Fagrelus 1/12/2011
Signature Date

Kurt Fagrelus

Printed Name

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Survey Date: DECEMBER 12, 2010

Signature and Seal of Professional Surveyor



JASON C. EDWARDS

Certificate Number 15269

NOT
1/27/11

EXHIBIT B
OPERATIONS PLAN
Federal B Com #91

APPROXIMATE FORMATION TOPS:

Ojo Alamo	710'
Kirtland	790'
Fruitland	1740'
Pictured Cliffs	2050'
Total Depth	2200'

Catch samples every 10 feet from 1700-feet to total depth.

LOGGING PROGRAM:

Run cased hole GR-CCL-CNL from total depth to surface.

CASING PROGRAM:

Hole Size	Casing Size	Wt./ft.	Setting Depth	Grade and Condition
12-1/4"	8-5/8"	24#	120' 200'	J-55
7-7/8"	5-1/2"	15.5#	2200'	J-55

Plan to drill a 12-1/4" hole and set 120' of 8-5/8" OD, 24#, J-55 surface casing. Then plan to drill a 7-7/8" hole to total depth with gel-water mud program to test the Fruitland Coal. 5-1/2", 15.5#, J-55 production casing will be run and cemented. Cased hole GR-CCL-CNL log will be run. Productive zone will be perforated and fractured. After frac, the well will be cleaned out and production equipment will be installed.

CEMENTING PROGRAM:

Surface: Cement to surface with 75-cf Class B + 2% CaCl₂.
Circulate to surface.

Production Stage- Cement w/365-sx Premium Lite FM 3% BWOC Calcium Chloride + 0.25 lbs/sx Celloflake + 5 lbs/sk LCM-1 + 0.4% BWOC FL-52 + 8% BWOC Bentonite + 0.4% BWOC Sodium Metasilicate + 112.3% fresh water (12.1 lb/gal, 2.13 cu ft/sx - 375-cu ft slurry). Tail w/370-sx Type III cement + 1 lb/sk Calcium Chloride + 0.25 lb/sx Celloflake + 0.2% BWOC FL-52 + 59% fresh water (14.6 lb/gal, 1.38 cu ft/sx-250-cu ft slurry).

Total cement slurry for production stage is 625-cf
Circulate cement to surface.

An adequate spacer will be pumped ahead of the cement slurry to help prevent mud contamination of the cement. An adequate number of casing centralizers will be run through useable water zones to ensure that casing is centralized through these zones. The adequate number of centralizers will be determined based on API standards. Centralizers to impart a swirling action around the casing will be used just below and into the base of the lowest usable water zone. These devices will assist mud displacement, increase cement bonding potential and create an effective hydraulic seal. A chronological log will be kept which records the pump rate, pressure, slurry density, and slurry volume for the cement job. The log will be sent to the BLM after completion of the job.

Maximum Anticipated Bottom Hole Pressure - 300 psi.

Drilling Fluid - will be fresh water with bentonite 8.9#/gal.

WELLHEAD EQUIPMENT:

Huber 8-5/8"x5-1/2" casing head, 1000# WP, tested to 2000#.
Huber 5-1/2"x2-7/8" tubing head, 1000# WP, tested to 2000#.

Blow-Out Preventer Equipment (BOPE): Exhibit D.

Annular preventer, double ram, or 2 rams with one being blind and one being a pipe ram.
Kill line (2" minimum)
1 kill line valve (2" minimum)
1 choke line valve
2 adjustable chokes
Upper kelly cock valve with handle available.
Safety valve and subs to fit all drill string connections in use.
Pressure gauge on choke manifold.
2" minimum choke line.
Fill-up line.

Working pressure for all BOPE will be 2,000 psi or greater.

Will test BOPE (blind rams, pipe rams, choke manifold and surface casing) separately. Each test will include a low pressure test to 250-psig held for five minutes and a high pressure test to 800-psig held for thirty minutes (with no more than a 10-percent pressure drop during the duration of the tests). If a 10-percent or greater pressure drop occurs; a packer will be run to isolate the surface casing and BOPE to locate the source of the leak.


Contacts: Dugan Prod. Corp. Office & Radio Dispatch: 325-1821

<u>Mark Brown</u>	<u>Kurt Fagrelus</u>	<u>John Alexander</u>
327-3632 (H)	325-4327 (H)	325-6927 (H)
320-8247 (M)	320-8248 (M)	320-1935 (M)

Well Control Equipment Schematic for 2,000 psi BOP


EXHIBIT D.

BOP Stack

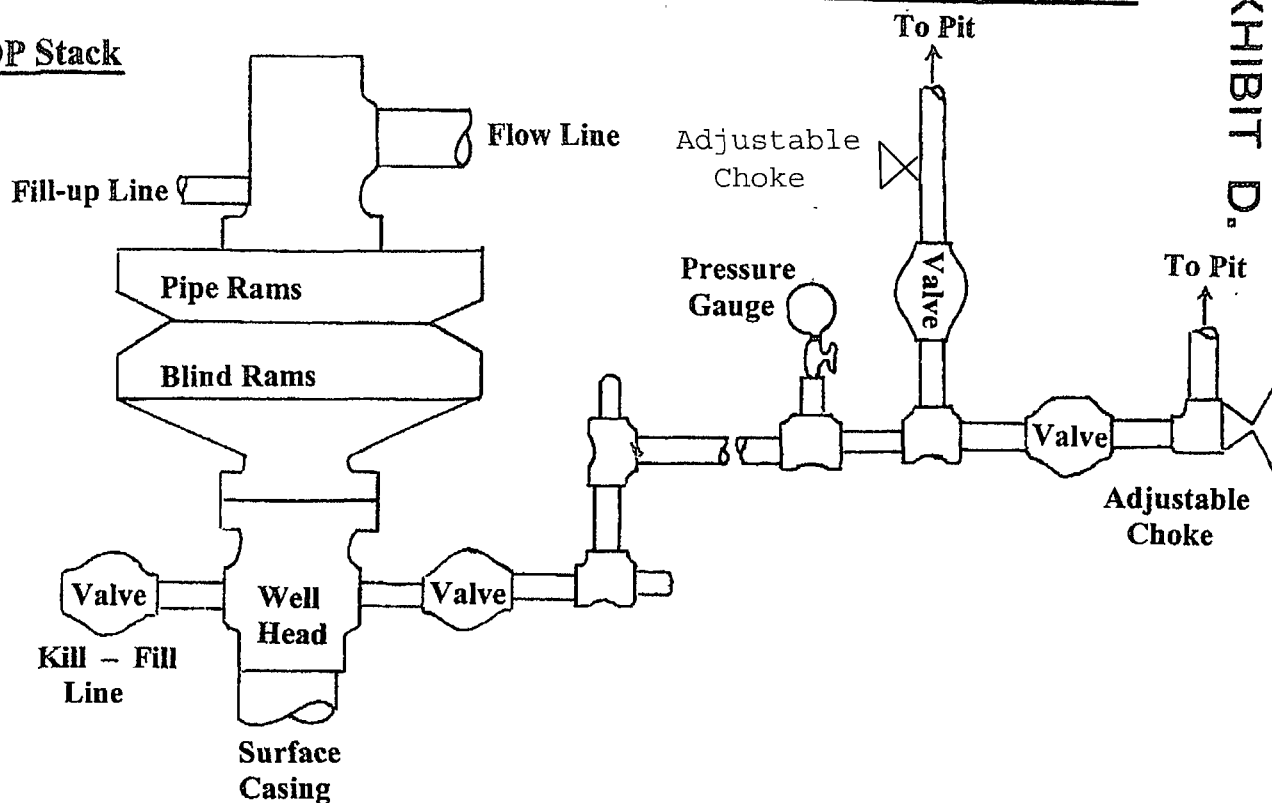

Choke & Kill

Manifold

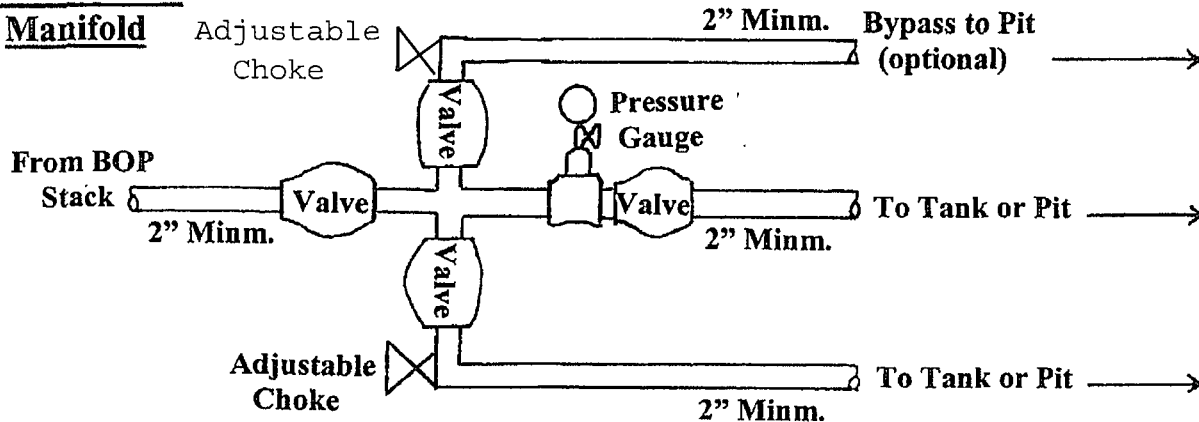

Working Pressure for all equipment is 2,000 psi or greater

DUGAN PRODUCTION CORP.
Federal B Com #91