District I.

1625 N French Dr., Hobbs, NM 88240
District II.
1301 W. Grand Avenue, Artesia, NM 88210
District III.
1000 Rio Brazos Road, Aztec, NM 87410
District IV.
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action. X Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions. Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
Operator: Energen Resources Corporation OGRID#: 162928
Address 2010 Afton Place, Farmington, NM 87401
Facility or well name: CJ Holder Com #201S
API Number: 30-045-34945 OCD Permit Number:
U/L or Qtr/Qtr B Section 27 Township 28N Range 13W County: San Juan
Center of Proposed Design: Latitude <u>36.63861 N</u> Longitude <u>108.20367 W</u> NAD: ☐1927 🗓 1983
Surface Owner X Federal State Private Tribal Trust or Indian Allotment
Notice N
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation. P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Drying Pad Unlined Liner type: Thickness mil LLDPE HDPE PVC Other
Below-grade tank: Subsection I of 19.15 17.11 NMAC Volume bbl Type of fluid: Tank Construction material: Oll. CONS. DIV. DIST. 3 Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thickness mil LLDPE HDPE PVC Other
Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, schounstitution or church)	ol, hospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
X Alternate. Please specify 4' high weld-wired fence	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
☐ Screen ☐ Netting ☐ Other	
Monthly inspections (If netting or screening is not physically feasible)	
Tronting inspections (if meeting or servering is neceptify teasible)	
Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
X Signed in compliance with 19 15.3.103 NMAC	
0	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Burconsideration of approval.	reau office for
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval	
10	
Siting Criteria (regarding permitting) 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accommendations of accommendations of accommendations of accommendations. Requests regarding changes to certain siting criteria may require administrative approval from the application of accommendation of the santa for guidance. Siting criteria does not apply to draw above-grade tanks associated with a closed-loop system.	propriate district of approval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells	☐ Yes X No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes X No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo, Satellite image	Yes X No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (Applies to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo; Satellite image	☐ Yes 🗓 No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes X No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality	Yes X No
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes X No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes X No
Within a 100-year floodplain.	☐ Yes X No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number or Permit Number
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17 9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17.10 NMAC Design Plan - based upon the appropriate requirements of 19 15.17 11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15 17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon Quality Control/Quality Assurance Construction and Installation Plan the appropriate requirements of 19.15.17.12 NMAC Preeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19 15 17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: \[\] Drilling \[\] Workover \[\] Emergency \[\] Cavitation \[\] P&A \[\] Permanent Pit \[\] Below-grade Tank \[\] Closed-loop System Alternative Proposed Closure Method: \[\] Waste Excavation and Removal \[\] Waste Removal (Closed-loop systems only) \[\] On-site Closure Method (Only for temporary pits and closed-loop systems) \[\] \[\] In-place Burial \[\] On-site Trench Burial \[\] Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Faculty Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15.17 13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure I Instructions: Please inden	Ear Closed-loop Systems That Utilize Above Group the facility or facilities for the disposal of liquid	und Steel Tanks or Haul-off Bins	Only: (19 15.17.13 I Use attachment if mo	O NMAC) re than two
facilities are required. Disposal Facility Name.		Disposal Facility Permit Number:	-	
Disposal Facility Name		. Disposal Facility Permit Number.		
Will any of the proposed cloperations?	osed-loop system operations and associated activiti		,	vice and
Soil Backfill and C	is which will not be used for future service and open over Design Specifications based upon the appro- based upon the appropriate requirements of Subse- lan - based upon the appropriate requirements of Subse-	opriate requirements of Subsection Fection I of 19.15.17.13 NMAC	I of 19 15.17.13 NM/	AC
Instructions: Each siting provided below. Requests be considered an exception	con-site closure methods only: 19.15.17.10 NMA criteria requires a demonstration of compliance in regarding changes to certain siting criteria may real which must be submitted to the Santa Fe Environequivalency are required. Please refer to 19.15.17.	t the closure plan. Recommendatio equire administrative approval fron nmental Bureau office for consider	ı the appropriate dist	rict office or may
	0 feet below the bottom of the buried waste State Engineer - iWATERS database search; USGS	S; Data obtained from nearby wells		Yes X No
	0 and 100 feet below the bottom of the buried waste State Engineer - 1WATERS database search, USGS			☐ Yes [X] No ☐ NA
	100 feet below the bottom of the buried waste. State Engineer - iWATERS database search; USGS	S, Data obtained from nearby wells		Yes □No □ NA
lake (measured from the or	uously flowing watercourse, or 200 feet of any othe dinary high-water mark) Visual inspection (certification) of the proposed si	-	, sinkhole, or playa	Yes No
	nanent residence, school, hospital, institution, or ch (certification) of the proposed site; Aerial photo; Sa		al application.	☐ Yes X No
watering purposes, or withi	of a private, domestic fresh water well or spring than 1000 horizontal feet of any other fresh water well State Engineer - iWATERS database; Visual inspec	l or spring, in existence at the time of	of initial application.	Yes X No
adopted pursuant to NMSA	ipal boundaries or within a defined municipal fresh 1978, Section 3-27-3, as amended. non or verification from the municipality; Written a			☐ Yes X No
Within 500 feet of a wetlan - US Fish and Wild	d. life Wetland Identification map; Topographic map;	Visual inspection (certification) of	the proposed site	☐ Yes X No
Within the area overlying a - Written confirmat	subsurface mine. ion or verification or map from the NM EMNRD-M	lining and Mineral Division		☐ Yes ☒No
Within an unstable area. - Engineering meas Society; Topograph	ures incorporated into the design; NM Bureau of Goic map	eology & Mineral Resources; USGS	s; NM Geological	Yes 🗓 No
Within a 100-year floodpla - FEMA map	in.			Yes X No
	ecklist: (19.15.17.13 NMAC) Instructions: Each that the documents are attached	of the following items must be attac	hed to the closure pla	n. Please indicate,
☐ Proof of Surface Owne ☐ Construction/Design P ☐ Construction/Design P ☐ Protocols and Procedur ☐ Confirmation Sampling ☐ Waste Material Sampli ☐ Disposal Facility Name ☐ Soil Cover Design - ba ☐ Re-vegetation Plan - ba	nnce Demonstrations - based upon the appropriate regressive passed upon the appropriate requirements an of Burial Trench (if applicable) based upon the an of Temporary Pit (for in-place burial of a drying res - based upon the appropriate requirements of 19. Plan (if applicable) - based upon the appropriate requirements of Plan - based upon the appropriate requirements of and Permit Number (for liquids, drilling fluids and sed upon the appropriate requirements of Subsection based upon the appropriate requirements of Subsection based upon the appropriate requirements of Subsections and upon the appropriate req	of Subsection F of 19.15 17.13 NM appropriate requirements of 19.15.18 pad) - based upon the appropriate reduirements of Subsection F of 19.15 of Subsection F of 19.15.17.13 NM/d drill cuttings or in case on-site closen H of 19.15.17.13 NMAC on I of 19.15.17.13 NMAC	7.11 NMAC requirements of 19.15 5.17.13 NMAC	

Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and	complete to the best of my knowledge and belief					
Name (Print). Andrew Soto	Title: Drilling Engineer					
Signature:	Date: 9/23/11					
e-mail address. asoto@energen.com	Telephone. 505 324-4143					
OCD Representative Signature: Permit Application (including closure plan) Closure	Plan (only)					
Title: Compliance Office OCDP	ermit Number:					
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:						
22						
Closure Method Waste Excavation and Removal On-Site Closure Method Alternative Closure If different from approved plan, please explain.	re Method					
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized. Disposal Facility Name:						
Disposal Facility Name: Disposal	Facility Permit Number:					
Were the closed-loop system operations and associated activities performed on or in area Yes (If yes, please demonstrate compliance to the items below)	s that will not be used for future service and operations?					
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique						
Closure Report Attachment Checklist: Instructions Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location Latitude Longitude NAD: 1927 1983						
25						
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is belief. I also certify that the closure complies with all applicable closure requirements an						
Name (Print):	Title					
Signature:	Date:					
e-mail address	Telephone:					

District I 1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico Energy, Minerals & Natural Resources Department Form C-102 Revised October 12, 2005

DISTRICT II 1301 W. Grand Avenue , Artesia. NM 68210

OIL CONSERVATION DIVISION 1220 South St. Francis Dr.

Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies


DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410


DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

Santa Fe. NM 87505

☐ AMENDED REPORT

		WEI	L LOC	CATION	AND	ACR	EAGE DE	EDICA	TION F	PLAT		
¹API N	lumber			Pool Code 71629					Pool Nam FC	e		
Property Cod					⁵ Proj	perty N	lame				4 E	ell Number
21180)					HOL						#201s
'0GRID No. 162928					*0pei	rator N J RFS			*Revation			Revation 6060'
102320										i		
UI, or lot no.	Section	Township	Range	Lot Idn	10 Surf		Ocation North/South li	ne Peel	from the	East/Wes	et line	County
B B	27	28-N	13-W	200 100	700'		NORTH	1	1802'	EAS		SAN JUAN
<u> </u>	**	-	11 Bo	ttom Ho	le Location	on If	Different F	rom Su	ırface			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from	the	North/South li	ne Fee	from the	East/We	st line	County
Dedicated Acres	13 Joint	or Infill	*Consolidati	on Code L	Order No.			_		L	·····	J
320ac E/				,								
No allowable will		gned to this	s completion	on until all	interest hav	ve bee	n consolidated	or a no	n-standard	unit has	been ap	proved by the
division.										<u>.</u> .		
6		*******	FD 2.1/ SRASS CA QLO 191		N89	754'33	"W 2642.85'(M)	CALC COR BY DOUBLE PROP.	¹⁷ OP	ERATOI	R CER	TIFICATION
		:	289"59 " W 8	3 0.12 Chains	(R) 0			PROP.				n contained herota is y knowledge and
						1		:	beltef, and t	hat this orga	mization of	ther owns a working t in the land
•		ı		RESOURC		_	1802'		including th	e proposed b	ottom hole	location or has a ion pursuant to a
				LDER #20 AT. 36.6386				S.(N	contract will	h an owner	of such a s	nineral or working
	İ			G. 108.2036				2638.05'(M)	computation			agreement or a entered by the
						$\neg \dagger$			division ($\mathcal{Q}\mathcal{Q}$	2	_
								Chains'(R) NO'01'38"W	D	1/2		9-26-1
	1							haln 701	Signatu		$\stackrel{\sim}{=}$	Date
	l							8 8	HNO	00	201	δ
	1					1		.≱	Printed	Name		
								N0.01				
				27				Ž				
	ľ			 				FD 2 1/2" BRASS CAP GLO 1913	18 SU	RVEYO	R CER	TIFICATION
	1											ion shown on this pla
	ł					- }			me or unde	τ my superv	ision, and	
									and correct	to the best	of my belie	g.
•										NOTA!	3167	42
									Date of S	Survey (J WIE	15%
									Signature	and Seal	r Protessio	nal Surveyor:
	1										18462	T81_
												1/1
	1					ł			12		\subseteq	164
										A CONTRACTOR	66	(ART
						- 1		FD 2 1/2° BRASS CAP	Certificate		DD	

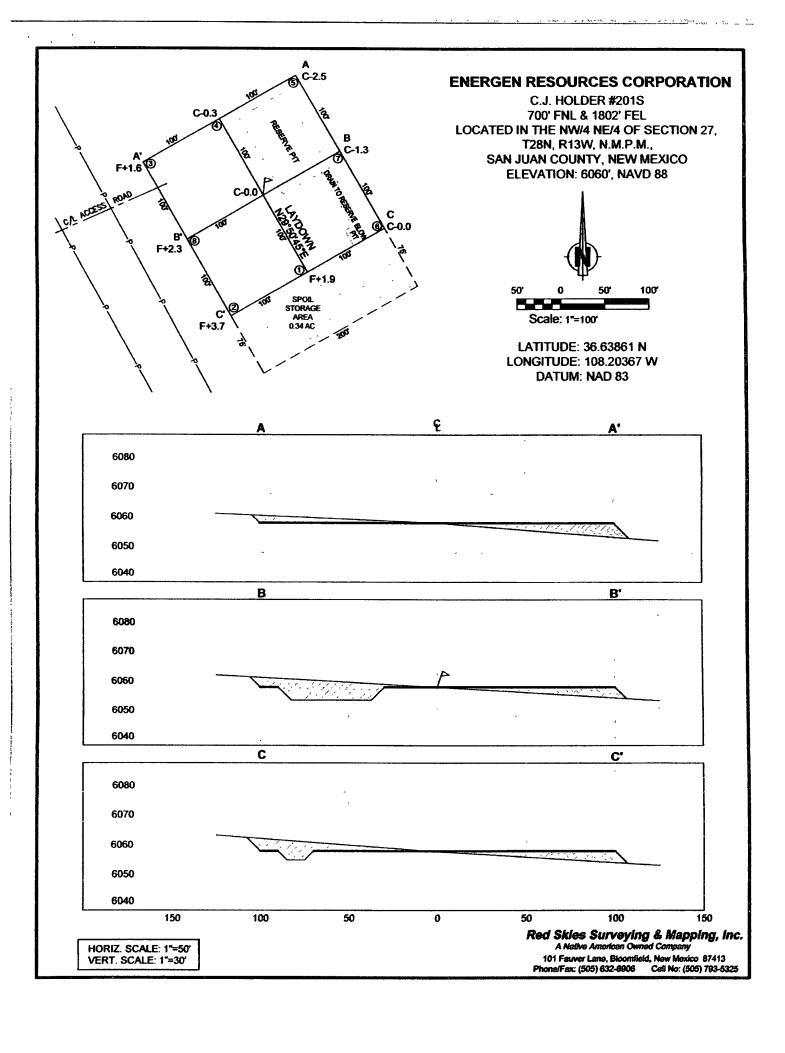

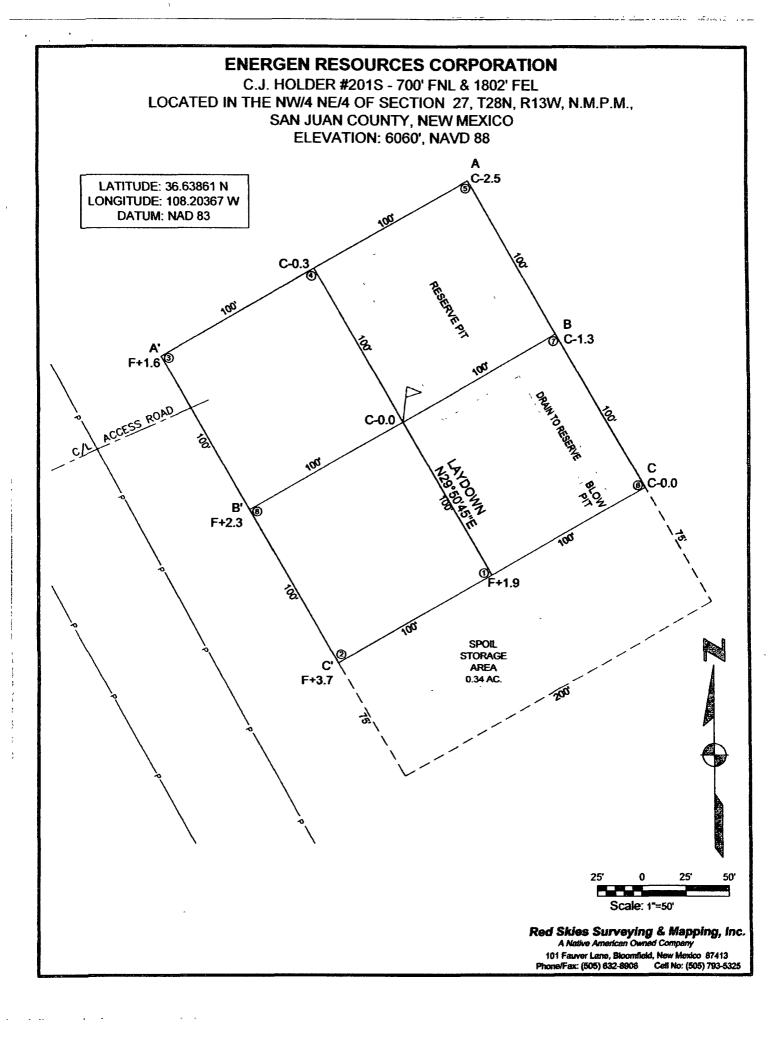



Temporary Pit Design Plan

The pit will be designed and constructed in the following manner:

- 1) Top soil will be stripped, stockpiled and stored as designated on the attached well sight layout schematic. Storage will be in accordance with the requirements set forth as described in item B of the the siting requirements of 19.15.17.11 NMAC.
- 2) A sign will be posted on location in accordance with 19.15.3.103 NMAC.
- 3) A four strand barbwire fence will be constructed around the perimeter of the pit with the strands evenly spaced between one and four feet from the ground. This fence will be used to excluded livestock from inadvertently entering the pit. The side of the fence adjacent to the rig will be removed during operations. This fence if located within 1000 feet of a permanent residence, school, hospital, institution or church will be a six foot chain link fence with two strands of barbed wire at the top.
- 4) The pit will be designed to confine liquids, prevent unauthorized releases by constructing a foundation with interior slopes consisting of a firm and unyielding base that are smooth and free of rocks, debris or other sharp edges to prevent liner damage.
- 5) The slopes will be constructed with a 2:1 ratio of vertical to horizontal with a changing slope within five feet of the shale shakers trending towards horizontal.
- 6) The volume of the pit will no exceed 10 acre feet including freeboard.
- 7) The pit will be lines with a LLDPE geomembrane liner with a thickness of no less then 20mm. The liner material will be compatible with EPA SW-846 method 9090A.
- 8) Liner seams will be orientated perpendicular to the largest slope with an overlap of four to six inches.
- 9) If needed a geotextile will be place under the liner to reduce localized stress-strain that may compromise liner integrity.
- 10) The edges of the liner will be anchored in the bottom of a compacted earthfilled trench no less the 18 inches deep.
- 11) To prevent runon of surface water a berm no less then 12 inches high will be constructed around the perimeter of the pit. With drainage ditches being directed to the runoff requirements set forth in the APD Condition of Approval.



Temporary Pit Operations Plan

The pit will be operated and maintained; to contain liquids and solids, to insure liner and secondary containment integrity, to aid in the prevention of contamination of fresh water sources, in order to protect public health and the environment. To attain this goal the following steps will be followed;

- 1) The fluids in the pit remaining after rig release will be vacuumed out and transported to active drilling locations to be reused or disposed of with Agua Moss LLC in the Pretty Lady #1 (Disposal API Number # 30-048-30922) within 30 days. Residual fluids after vacuuming will be allowed to evaporate.
- 2) No hazardous waste, miscellaneous solid waste or debris will be discharged into or stored in the pit. Only fluids or cuttings used or generated in the drilling process will be placed or stored in the pit.
- 3) The division district office will be notified within 48 hrs of the discovery of compromised liner integrity. Upon the discovery of the compromised liner repairs will be enacted immediately.
- 4) The division district office will be notified within 48 hrs of the discovery of compromised liner integrity below the fluid level unless more then 25 bbls is released in which case Rule 116's 24 hr notification will apply. All liquid above the damaged liner section will be removed to a level below the damage within 48 hrs and repairs will be enacted.
- 5) Precautionary measures will be taken to insure no liner damage is caused when adding or removing fluids and solids from the pit. This will be accomplished by gradually increasing the slope of the pit from negligible underneath the shale shakers to the 2:1 ratio required by 19.15.17.11 within five feet. A perforated pipe will be installed in the corner of the pit so that a vacuum hose can be run through it to remove fluids without damaging the liner.
- 6) Perimeter berms and ditches will be constructed around the exterior of the pit to prevent surface water run-on but the rig side may be left open to allow location drainage.
- 7) An oil absorbent boom will be maintained on site to remove oil from the pit's surface if necessary. Immediately on the cessation of drilling any accumulated oil will be removed from the surface of the pit.
- 8) A minimum of two feet of freeboard will be maintained at all times. Once fluid levels have the possibility of rising above the minimum freeboard fluid will be vacuumed out of the pit.
- 9) All of the above operations will be inspected and a log will be signed and dated. During drilling operations the inspection will be daily and after rig release they will be carried out weekly as log as there is fluid in the pit.



Temporary Pit Closure Plan

The pit will be closed with in place burial. If the pit is located on private surface, the surface owner will be notified prior to closure by certified mail and the return receipt will be included in the closure packet. The OCD will be verbally or by other means notified at least 72 hours and not more then one week prior to the pit closing. The following process will be used to close the pit:

- 1) At time of closure, all free standing fluids will be removed and reused or disposed with Agua Moss LLC in the Pretty Lady #1 (Disposal API Number # 30-048-30922) or an Energen operated permitted disposal well. The contents will be solidified to a bearing capacity sufficient to support the final cover. This will be accomplished by mixing the contents with soil at a mixing ratio no greater then 3:1 soil to contents.
- 2) The liner will be cut off at the mudline of the stabilized contents.
- 3) Sampling will be done by collecting a minimum of a five-point composite sample of the contents after stabilization. The sample will be analyzed for the following components (if the groundwater is less than 100 feet below the pit but greater than 50 feet, testing for chlorides will be done to the lower limit);

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	500/1000)

- 4) After demonstrating that the stabilized contents are under the limits listed above, the contents will be covered with compacted non-waste containing earthen material to a minimum of three feet. If stabilized contents exceed a volume that can be covered with three feet of earth and a foot of topsoil the excess contents will be removed and sent to Envirotech (Permit NM-01-0011) or IEI Landfarm (Permit NM-01-0010B). If the stabilized contents do no meet the above stated limits the stabilized contents will all be hauled to Envirotech pursuant to excavation and removal guidelines (19.15.17.13 B1).
- 5) After the stabilized contents have been covered, the stockpiled topsoil will be replaced to a minimum depth of one foot. Topsoil cover will be graded to prevent ponding of water and erosion of the cover material. This will be accomplished within six months of rig release.
- 6) The exact location of the on-site burial will be reported to the Aztec field office on the C-105 form. A deed notice identifying the exact location of the on-site burial will be filed with the county clerk if the pit is on private surface.
- 7) The final closure report (C-144) will be filed within 60 days of closure completion and include sampling results, plot plan, details on backfilling / covering and inspections during the life of the pit.



- 8) If the pit is located on federal or tribal surface, seeding will be deferred to BLM requirements per the BLM / OCD MOU. Otherwise, the disturbed area will be seeded or planted the first growing season after closing the pit. Seed will be drilled on the contour whenever practical or by other division-approved methods. The goal being to obtain vegetative cover that equals 70% of the native cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plant species, including at least one grass but not including noxious weeds. Cover will be maintained through two successive growing seasons. During the two growing seasons that prove viability there shall be no artificial irrigation of the vegetation. Seeding or planting will continue until the required cover is reached. If conditions are not favorable to establishment of vegetation due to periods of drought or similar problems then the Aztec office of the OCD will be notified. The Aztec office of the OCD will also be notified when the disturbed ground successfully achieves re-vegetation.
- 9) Until the abandonment of the wells on the pad where the pit is located a steel marker no less then four inches in diameter will be cemented in a hole three feet deep in the center of the onsite burial. The top of this marker will be flush with the ground. Once all wells on the pad are abandoned a four foot tall riser will be welded on top of the marker with; operator name, lease name, well name and number, unit number, section, township and rage, and a designation that it is an onsite burial location

Closed-Loop System Plan: Completion

In accordance with Rule 19.15.17 NMAC, the following plan describes the general Design, Operating & Maintenance, and Closure of the proposed Closed-Loop systems for this well.

Closed-Loop Design Plan:

.

The Closed-Loops System will consist of one or more temporary above-ground steel tank(s) or waste pit(s) suitable for holding all cuttings and fluids circulated from the well during the planned rig operations. The tank(s) will be of sufficient volume to maintain a safe free-board between disposal of the liquids and solids from rig operations. Additional design considerations include.

- 1. This Closed-Loop System will not use a drying pad, temporary pit, below-grade tank or sump.
- 2. Fencing is not required for an above-ground closed-loop system.
- 3. It will be signed in compliance with 19.15.3.103 NMAC.
- 4. A frac tank will be on location to store fresh or KCl water.
- 5. Tanks will be placed on the active and disturbed areas of the well location and within the existing ROW footprint.

Closed-Loop Operating Plan:

The Closed-Loops System will be operated and maintained: to contain liquids and solids, to aid in the prevention of contamination of fresh water sources, in order to protect public health and the environment The following steps will be followed to attain this goal:


- 1. The liquids in the steel tank(s) will be vacuumed out and disposed of at one of the following facilities depending on the proximity of the well and the disposal volumes: Auga Moss Pretty Lady (Permit 30-045-30922); Basin Disposal (Permit: NM-01-0005); Sunco Disposal #1 (NM 01-009) or T-N-T Environmental (NM 01-008).
- 2. Solids in the Closed-Loop tank will be vacuumed out and disposed of at one of the following facilities depending on the proximity of the well and the disposal volumes: Envirotech (Permit Number NM-01-0011); Industrial Ecosystems Inc (Permit NM 1-10-B) or T-N-T Environmental (NM 01-008) on a periodic basis as necessary to prevent over topping.
- 3. No hazardous waste, miscellaneous solid waste or debris will be discharged into or stored in the tank(s). Only fluids or cutting intrinsic to, used or generated by rig operations will be placed or stored in the tank(s).
- The Division District office will be notified within 48 hours of the discovery of compromised integrity of the Closed-Loop System. Upon discovery of the compromised tank, repairs will be enacted immediately.
- All of the above operations will be inspected each day, signed and dated and any irregularities will be recorded During rig operations the inspection will be daily.


Closed-Loop Closure Plan:

The Closed-Loops System will be closed in accordance with 19 15.17.13. This will be done by:

- Transport for disposal all remaining liquids to one of the following facilities depending on the proximity of the disposal well and disposal volumes: Auga Moss - Pretty Lady (Permit 30-045-30922); Basin Disposal (Permit: NM-01-0005); Sunco Disposal #1 (NM 01-009) or T-N-T Environmental (NM 01-008).
- Transporting cuttings and all remaining sludge to an approved facility: Envirotech (Permit Number NM-01-0011); Industrial Ecosystems Inc (Permit NM 1-10-B) or T-N-T Environmental (NM 01-008) as reasonable as possible after the rig activities.
- 3. Removal of the tank(s) from the well location after the rig activities has been completed.
- 4. At the time of well abandonment, the site will be reclaimed and re-vegetated to pre-existing conditions when possible, or as stipulated by the landowner in a surface use agreement. Timing of reseeding, seed mix, and assessment of successful reclamation will be in compliance with conditions in APD.

AERIAL PHOTO: CJ HOLDER #201S

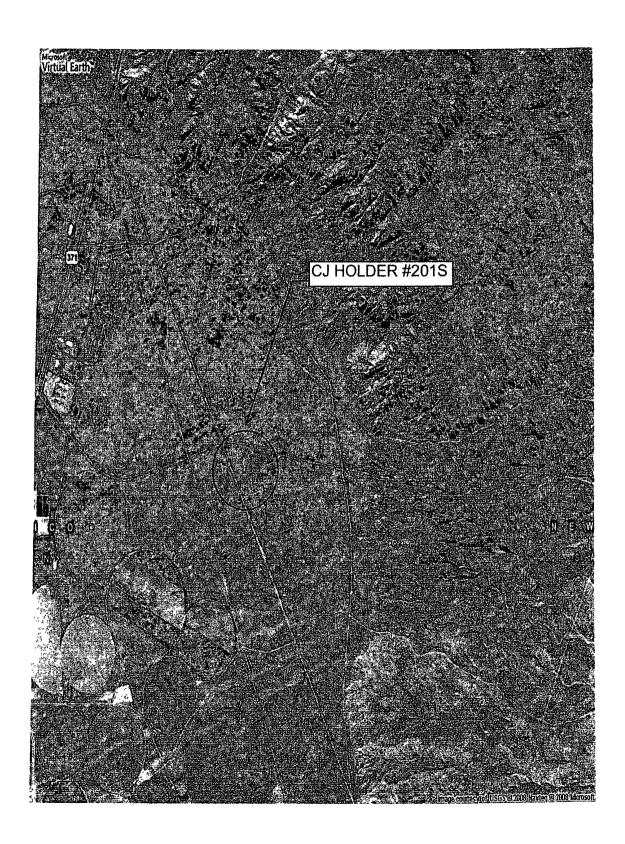

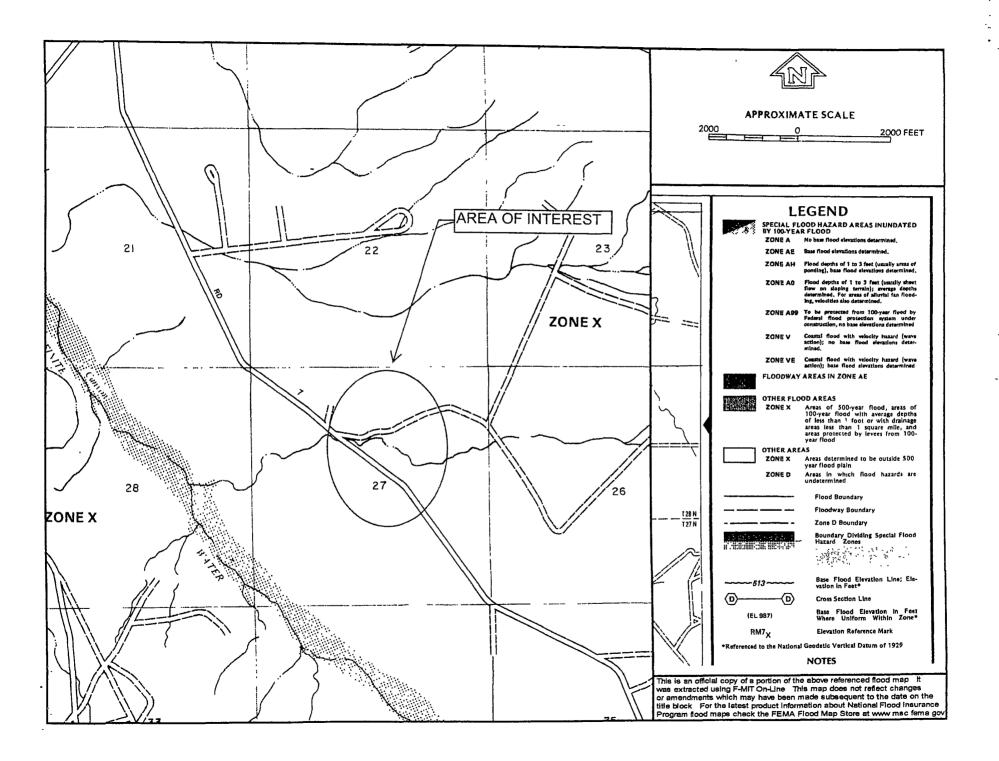

Hydrogeologic Data:

100-year Floodplain:

The map available from FEMA does not indicate the well to be in the 100-year floodplain for the subject well, C J Holder Com #201S. It is located in San Juan County, NM, in FEMA zone X which is outside the 500 year flood plain.

Site Specific:

The Nacimiento formation is the highest water bearing zone at this site with the exception of possible perched water. It is a Tertiary bedrock unit in the San Juan Basin. The formation occurs at the surface at the C J Holder Com #201S location and ranges from 0' to 500' in this township and range. There are no potentially unstable areas in the region. This below grade tank is not located over a subsurface mine.


The New Mexico State Engineers Water Report shows no water wells in Sec. 27, Township 28N, Range 13W, however based on the topographic map the depth to groundwater could occur at 527'. This well is on top of a mesa surrounded by dry washes that lead into a dry area of Gallegos Canyon Wash 507' lower in elevation. With groundwater known to be 20' below Gallegos Canyon Wash, groundwater is assumed to be at a depth of approximately 527' below the C J Holder Com #201S. Any significant ground water shallower than 527' would have leached out long ago.

Geologic Summary:

The Nacimiento sandstone is in the middle Tertiary sequence in the San Juan Basin. This sequence consists because of its slope forming habit is often assumed to be mostly mudstone, however it also contains medium to very coarse grained sandstones. The mudstones display a popcorn weathering characteristic of swelling clays. The Nacimiento ranges in thickness from 413' to 2,232'. Groundwater is associated with the coarser and more continuous sandstone bodies. The Nacimiento conformably overlies the Ojo Alamo formation.

Reference:

Stone W.J., Lyford F.P., Frenzel P.F., Mizell N.H., and Padgett E.T.: Hydrology and water resources of San Juan Basin, New Mexico Hydrologic Report 6, 1983.

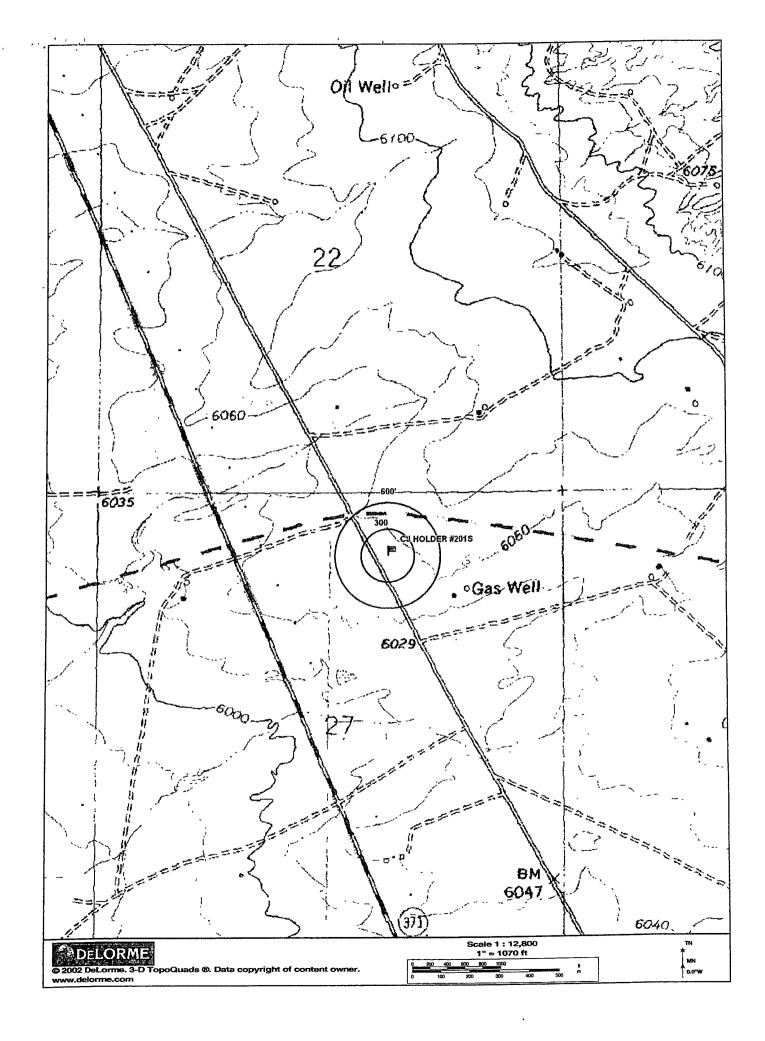

New Mexico Office of the State Engineer POD Reports and Downloads


	•					
Township: 28N	Range: 13W Sections:	2	27		***************************************	
NAD27 X:	Y: Zone:	Sea	rch Rad	lius:		
County: SJ	Basin:	Number:		Suff	īx:	
Owner Name: (First)	(Last)	ON	lon-Don	nestic	O Domestic	⊙ All
POD / Surf	face Data ReportAvg Depth to Water R	eportWate	r Colum	n Repor	t	
	Clear Form iWATERS Me	nu . He	lp			
	WATER COLUMN REF	PORT 02/0	03/200	9		
	ers are 1=NW 2=NE 3=SW 4=SE) ers are biggest to smallest)			Depth	Depth	
POD Number Tws	s Rng Sec q q q Zone	x	Y	Well	Water	Column

No Records found, try again

MMQonline Public Version

Area of Interest - CJ Holder #201S

Mines, Mills	& Quarries Commodity Groups	
Δ	Aggregate & Stone Mines	
•	Coal Mines	
*	Industrial Minerals Mines	
•	Industrial Minerals Mills	
2	Metal Mines and Mill Concentrate	
6	Potash Mines & Refineries	

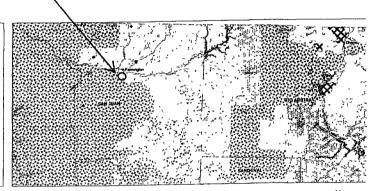

SCALE 1: 2,325,225 20 0 20 40 60 MILES

