State of New Mexico Energy Minerals and Natural Resources

Form C-144 July 21, 2008

District II
301 W. Grand Ave. Artes

1301 W Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV 1220 S St Francis Dr , Santa Fe, NM 87505 Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

5999

<u>Pit, Closed-Loop System, Below-Grade Tank, or</u> <u>Proposed Alternative Method Permit or Closure Plan Application</u>

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	X Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinance

Descritor Publicator Personage Oil & Con Company LD
Operator. Burlington Resources Oil & Gas Company, LP Address. P.O. Box 4289, Farmington, NM 87499
Facility or well name San Juan 27-4 Unit 22M
API Number 30-039-30450 OCD Permit Number
U/L or Qtr/Qtr. L(NW/SW) Section: 14 Township. 27N Range: 4W County Rio Arriba
Center of Proposed Design: Latitude: 36.570692 °N Longitude: 107.225986 °W NAD: 1927 x 1983
Surface Owner X Federal State Private Tribal Trust or Indian Allotment
X Pit: Subsection F or G of 19 15 17 11 NMAC Temporary
Closed-loop System: Subsection H of 19 15 17 11 NMAC Type of Operation P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type Thickness mil LLDPE HDPE PVD Other Liner Seams Welded Factory Other
Liner Seams Welded Factory Other
Visible sidewalls and liner Visible sidewalls only Other Liner Type Thickness mil HDPE PVC Other
5 Alternative Method: Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval



Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate Please specify Netting: Subsection E of 19 15 17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible) Signs: Subsection C of 19 15 17 11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19 15 3 103 NMAC Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19 15 17 NMAC for guidance Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval (Fencing/RGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval					
The property of the control of the property	Fencing: Subsection D of 19 15 17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)				
The property of the control of the property	Chain link six feet in height two strands of barbed wire at ton (Required if located within 1000 feet of a permanent residence, school, hospital, in	ditution or chu	rch)		
Autemate Please speciely		manon or onu	, e.i.,		
Netting Subsection E of 19 15 17 11 NMAC (Apples to permanent pix and permanent approximation)					
Screen Melting Other	Alchiate Picase specify				
Screen Melting Other	7				
Monthly unspections (If neturing or screening at not physically flushelps)	Netting: Subsection E of 19 15 17 11 NMAC (Applies to permanent pits and permanent open top tanks)				
Signes: Subsection C of 19 is 17 11 NMAC 212 Y. 24-72; lettering, providing Operator's name, site location, and emergency telephone numbers 23 signed in compliance with 19 is 3 103 NMAC 34 Administrative Approvals and Exceptions: 34 Justifications and/or demonstrations of equivalency are required. Please refer to 19 is 17 NMAC for guidance 44 Please check a hox if one or more of the following is requested, if not leave blank: 45 Administrative approval(i) Receptists must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval (Feeting/BCT Linery) 45 Everytom(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval (Feeting/BCT Linery) 46 Everytom(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval (Feeting/BCT Linery) 47 Everytom(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval (Feeting/BCT Linery) 48 Everytom(s) Requests regarding changes to certain sting criteria mery require administrative approval from the application in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain sting criteria may require administrative approval (Feeting Reproval Applicant must attend justification) for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria desorted an exception of approval Application must attend justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria desorted an exception of approval Application of approval Application for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria desorted and exception of a continuously flowing materiactory of Peet of approval reproduced trains. 4	Screen Netting Other				
Signed in compliance with 19 15 17 11 NMAC	Monthly inspections (If netting or screening is not physically feasible)				
Signal compliance with 19 15 71 11 NMAC	8		_		
Administrative Approvals and Exceptions: Districtions and/or demonstrations of equivalency are required. Please refer to 19 15 17 NMAC for guidance. Please check a bas if one an imare of the following is required. Please refer to 19 15 17 NMAC for guidance. Please check a bas if one an imare of the following is required. Please refer to 19 15 17 NMAC for guidance. Please check a bas if one an imare of the following is required. Please refer to 19 15 17 NMAC for guidance. Please check a bas if one an imare of the following is required advision district of the Santa Fe Environmental Bureau office for consideration of approval (Pencing/RGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Policiona: The applicant imas demonstrate compliance for each siling criteria below in the application. Recommendations of acceptable source material are provided belows. Requests regarding changes to certain siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of proposed. Please of the santa Fe Environmental Bureau office for consideration of approval. Application in the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for material application. Ground water is less thans 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - tWATERS database search, USCS, Data obtained from nearby wells Within 500 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. NM Office of the State Engineer swithin a defined musicipal fresh water					
Administrative Approvals and Executions: Administrative Approvals and Executions:	12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers				
Administrative Approvals and Exceptions: Martinistrative Approvals and Exceptions: Martinistrative Approvals and constitutions and/or demonstrations of equivalency are required. Please refer to 19 15 17 NMAC for guidance Please check a hox Jone or more of the following is required to the appropriate division distinct of the Santa Fe Environmental Bureau office for consideration of approval (Pencing/BCT Liner)	X Signed in compliance with 19 15 3 103 NMAC				
Please check a bax if one or more of the following is requested. If not leave blank: Admunistrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval (Fencing/BGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval (Fencing/BGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval Please refer to 19 15 17 10 NMAC Instructions: The applicant must demonstrate compliance for each stilling criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain stilling criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval Application stilling criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain stiling criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of apply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NMA Office of the State Engineer - (WATERS database search, USGS, Data obtained from nearby-wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Visual inspection (certification) of the proposed site. Aerual photo, Satellite image Within 500 feet from a permanent residence, school, hospital, institution, or church in existence at the time of ini					
Please check a bax if one or more of the following is requested. If not leave blank: Admunistrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval (Fencing/BGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval (Fencing/BGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval Please refer to 19 15 17 10 NMAC Instructions: The applicant must demonstrate compliance for each stilling criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain stilling criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval Application stilling criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain stiling criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of apply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NMA Office of the State Engineer - (WATERS database search, USGS, Data obtained from nearby-wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Visual inspection (certification) of the proposed site. Aerual photo, Satellite image Within 500 feet from a permanent residence, school, hospital, institution, or church in existence at the time of ini	9 Administrative Approvals and Executions				
Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval (Pencing/RGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval (Pencing/RGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Please represents the submitted to the Santa Fe Environmental Bureau office for consideration of approval. Please represents the submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must state histification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - IWATERS database search, USGS, Data obtained from nearby-wells Within 300 feet for a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 for from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within 500 for five State Engineer - iWATERS database search, Visual inspection (certi					
Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval (Pencing/BGT Llner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval					
Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval Stiting Criteria (regarding permitting) 19 15 17 10 NMAC Instructions: The applicant must demonstrate compliance for each sting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding change to certain sting criteria and material are provided below. Requests regarding changes to certain sting criteria must are selected are provided below. Requests regarding changes to certain sting criteria must are selected and the state of provided and provided and acception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attack justification for request. Please refer to 19.15.17.10 NMAC for guidance. Stiting criteria does not supply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - IWATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site Aerial photo, Satellite image Yes No No		sideration of ar	proval		
Siting Criteria (regarding permitting) 19 15 17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attend histification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - IWATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 before fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizonal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within a confirmation or verification from the municipality. Written approval obtained from	-	or ap			
Siting Criteria (regarding permitting) 19 15 17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attend busification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - IWATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring, that less than five households use for domestic or stock watering purposes, or within 1000 berizonal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - i/WATERS database search, Visual inspection (certification) of the proposed site Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within in confirmation or verification from the municipality.					
Siting Criteria (regarding permitting) 19 15 17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attack justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby-wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring, in existence at the time of initial application. - Written confirmation or venification from the municipality. Written approval obtained from the municipality within 500 feet of a wetland. - Writt					
Instructions: The applicant must demonstrate compliance for each stiting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain stiting criteria may require administrative approal from the appropriate district office or may be considered on exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approar. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tank associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby-wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. No Office of a private, domestic fresh water well or spring, in existence at the time of initial application. No Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within 1000 for trained municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 1000 for ordination or verification from the municipality. Written approval obtained from the muni					
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Stante FE Environmental Bareau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMS					
appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system. Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizonal feet of any other fresh water well or spring in existence at the time of initial application. No No Mithin incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-273, as amended Written confirmation or verification from the municipality. Written approval obtained from the municipality Within 100 feet of a wetland. Within an unstable area. Engineering measures incorporated into the d					
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - IWATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within s00 feet of a wetland. Within s00 feet of a wetland. Within an unstable area. Within an unstable area. Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map					
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - IWATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search, Usual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet for a wetland. Within 500 feet for a wetland. Within 500 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Within an unstable area. Within an unstable area. Within an unstable area. Engineerin	consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria				
NM Office of the State Engineer - 1WATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizonal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wettand. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topograph	does not apply to drying pads or above grade-tanks associated with a closed-loop system.				
NM Office of the State Engineer - 1WATERS database search, USGS, Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizonal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wettand. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topograph	Ground water is less than 50 feet below the hottom of the temporary pit, permanent pit, or below-grade tank		\square_{N_0}		
(measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map		🗀	L		
(measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	Within 300 feet of a continuously flowing watercourse or 200 feet of any other watercourse, lakehed, sinkhole or plays lake	□ Ves	\square_{N_0}		
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Acrial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Acrial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map					
application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	· · · · · · · · · · · · · · · · · · ·				
application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	Within 300 feet from a normanent residence school bosnital institution or church in existence at the time of initial	□Ves	□No		
NA NA NA NA NA NA N					
Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	••				
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map		□			
 (Applied to permanent pits) Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map 					
- Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	· · · · · · · · · · · · · · · · · · ·	l Hes			
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. Within an unstable area. Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	(Applied to permanent pits)	NA NA			
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. Within the area overlying a subsurface mine. Within an unstable area. Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	- Visual inspection (certification) of the proposed site, Aerial photo, Satellite image	i			
- NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	· · · · · · · · · · · · · · · · · · ·	Yes	□No		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	- NM Office of the State Engineer - iWATERS database search. Visual inspection (certification) of the proposed site				
adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map					
- Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	· · · · · · · · · · · · · · · · · · ·	Yes			
- US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map					
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	Within 500 feet of a wetland.	Yes	No		
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	- US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site				
Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	· ·	Yes	□No		
- Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division				
Society, Topographic map	Within an unstable area.	Yes	No		
m., m.,					
Within a 100-year floodplain			ارسار,		
- FEMA map		L Yes	∐N0		

Form C-144 Oil Conservation Division Page 2 of 5

	Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached				
	Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC				
	Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9 Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9				
	Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC				
	Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC				
	Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC				
	Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC				
	Previously Approved Design (attach copy of design) API or Permit				
	Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached				
	Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 15 17 9				
	Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC				
	Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC				
	Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC				
	Previously Approved Design (attach copy of design) API				
	Previously Approved Operating and Maintenance Plan API				
	13				
	Permanent Pits Permit Application Checklist: Subsection B of 19 15 17 9 NMAC				
	Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.				
	Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19 15 17 9 NMAC				
	Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC Climatological Factors Assessment				
	Certified Engineering Design Plans - based upon the appropriate requirements of 19 15 17 11 NMAC				
	Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19 15 17 11 NMAC				
	Leak Detection Design - based upon the appropriate requirements of 19 15 17 11 NMAC				
	Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15 17 11 NMAC				
	Quality Control/Quality Assurance Construction and Installation Plan				
	Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC				
	Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15 17 11 NMAC				
	Nuisance or Hazardous Odors, including H2S, Prevention Plan				
	Emergency Response Plan				
	Oıl Field Waste Stream Characterization				
	Monitoring and Inspection Plan Frosion Control Plan				
	Erosion Control Plan Erosion Control Plan				
	Proposed Closure: 19 15 17 13 NMAC				
	Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.				
	Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative				
	Proposed Closure Method Waste Excavation and Removal				
	Waste Removal (Closed-loop systems only)				
	On-site Closure Method (only for temporary pits and closed-loop systems)				
	In-place Burial On-site Trench				
	Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)				
	15				
	Waste Excavation and Removal Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.				
	Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC				
	Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC				
	Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)				
	Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC				
	Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC				
-	Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC				

Form C-144

16				
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19 15 17 13 D NM.	AC)			
Instructions Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more that facilities are required	i wo			
Disposal Facility Name Disposal Facility Permit #				
Disposal Facility Name Disposal Facility Permit #				
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for fu				
Yes (If yes, please provide the information No				
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19 15 17 13 13	NMAC			
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC				
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC				
17 Seting Critaria (Pagarding on outs alocure methods only), 10 15 17 10 MMAC				
Siting Criteria (Regarding on-site closure methods only: 19 15 17 10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Recommendations of acceptable source material are prov	nded below Requests regarding changes to			
certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submit office for consideration of approval Justifications and/or demonstrations of equivalency are required Please refer to 19 15 17 10 NMAC for guidance				
Ground water is less than 50 feet below the bottom of the buried waste	Yes No			
- NM Office of the State Engineer - IWATERS database search, USGS Data obtained from nearby wells				
Ground water is between 50 and 100 feet below the bottom of the buried waste	Yes No			
- NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby wells	N/A			
Ground water is more than 100 feet below the bottom of the buried waste	Yes No			
- NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby wells	□N/A			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark)	Yes No			
- Topographic map, Visual inspection (certification) of the proposed site				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application	Yes No			
- Visual inspection (certification) of the proposed site, Aerial photo, satellite image				
	Yes No			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application				
- NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted	Yes No			
pursuant to NMSA 1978, Section 3-27-3, as amended				
- Written confirmation or verification from the municipality, Written approval obtained from the municipality				
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site	Yes No			
Within the area overlying a subsurface mine	□ Ves □ No			
- Written confiramtion or verification or map from the NM EMNRD-Mining and Mineral Division				
Within an unstable area	Yes No			
- Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society,				
Topographic map				
Within a 100-year floodplain - FEMA map	∐Yes ∐No			
18				
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must bee attached to the	closure plan. Please indicate,			
by a check mark in the box, that the documents are attached.				
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC				
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC				
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15 17 11 NMA	c			
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requiremen	ts of 19 15 17 11 NMAC			
Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC				
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17 13 N	MAC			
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC				
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)				
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC				
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC				
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC				

Form C-144 Oil Conservation Division Page 4 of 5

19
Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief Name (Print) Title
Signature Date
e-mail address Telephone
OCD Approval: Permit Application (including closure plan) Closure Plan (only). OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC Instructions Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed X Closure Completion Date: June 9, 2009
M Closure completion bater
22 Closure Method: Waste Excavation and Removal Mon-site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain
23
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions. Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities
were utilized
Disposal Facility Name Disposal Facility Permit Number
Disposal Facility Name Disposal Facility Permit Number
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?
Yes (If yes, please demonstrate compliane to the items below) No
Required for impacted areas which will not be used for future vervice and operations Site Reclamation (Photo Documentation)
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
Closure Report Attachment Checklist: Instructions. Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached X Proof of Closure Notice (surface owner and division) X Proof of Deed Notice (required for on-site closure) X Plot Plan (for on-site closures and temporary pits) X Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (if applicable) X Disposal Facility Name and Permit Number X Soil Backfilling and Cover Installation X Re-vegetation Application Rates and Seeding Technique X Site Reclamation (Photo Documentation) On-site Closure Location Latitude 36.57082 °N Longitude 107.22621 °W NAD 1927 X 1983
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print) Ethel Tally Title Staff Regulatory Technician
Signature Date 2/0/10
e-mail address ethel tally@conocophillips.com Telephone 505-599-4027

Burlington Resources Oil Gas Company, LP San Juan Basin Closure Report

Lease Name: San Juan 27-4 Unit 22M

API No.: 30-039-30450

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial.

3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached)(Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - II. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	4.0 ug/kg
BTEX	EPA SW-846 8021B or 8260B	50	333 ug/kG
TPH	EPA SW-846 418.1	2500	466mg/kg
GRO/DRO	EPA SW-846 8015M	500	55 mg/Kg
Chlorides	EPA 300.1	(1000)/500	110 mg/L

9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished through complying with Forest seeding requirements as allowed by the BLM/OCD MOU.

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished through complying with Forest seeding requirements as allowed by the BLM/OCD MOU.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: BR, BLM, San Juan 27-4 Unit 22M, UL-L, Sec. 14, T 27N, R 4W, API # 30-039-30450.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, July 10, 2008 8:16 AM

To:

'mark_kelly@nm.blm.gov'

Subject:

OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307

Huerfano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Lloyd A 100S

Martin 100

McCord B 1F

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San Juan 27-4 Unit 42N

San Juan 27-4 Unit 569N

San Juan 27-4 Unit 59N

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N

San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903

San Juan 27-5 Unit 904

San Juan 27-5 Unit 905

San Juan 27-5 Unit 906

San Juan 27-5 Unit 907

San Juan 27-5 Unit 908

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912

San Juan 27-5 Unit 913 San Juan 27-5 Unit 914

San Juan 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N

San Juan 28-5 Unit 77N San Juan 28-6 Unit 113N DISTRICT I 1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico

Form C-102 Revised October 12, 2005

DISTRICT II 1301 West Grand Avenue, Artesia, N.M. 68210

OIL CONSERVATION DIVISION Submit to Appropriate District Office 1220 South St. Francis Dr. Submit to Appropriate District Office Santa Fe, NM 87505

1000 Rio Brozos Rd., Astec, N.M. 87410

2 2008 JAN

1220 S. St. Francis Dr., Santa Po, NM 87505


Bureau of Land Management AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLATICO

'API Number 30-039-3	*API Number		KOTĄ .
⁴ Property Code 7452	⁶ Property Hame SAN JUAN 27-4 UNIT		° Well Number 22M
700HID No. 14538	_	Operator Hémes ES OIL AND GAS COMPANY LP	° Elevation 6898°

¹⁰ Surface Location Range Horth/South line UL or lot no. Section Township Lot Ida Feet from the East/West line County 27-N SOUTH 4-₩ 1735 1030 WEST RIO ARRIBA ¹¹ Bottom Hole Location If Different From Surface UL or lot no. Lot Idn Feet from the North/South line Feet from the Bast/West line Range County 1690 27-N 4--W 780 HTUOR RIO ARRIBA WEST Dedicated Acres Joint or Infill 24 Consolidation Code Order No. 320.00 W/2

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

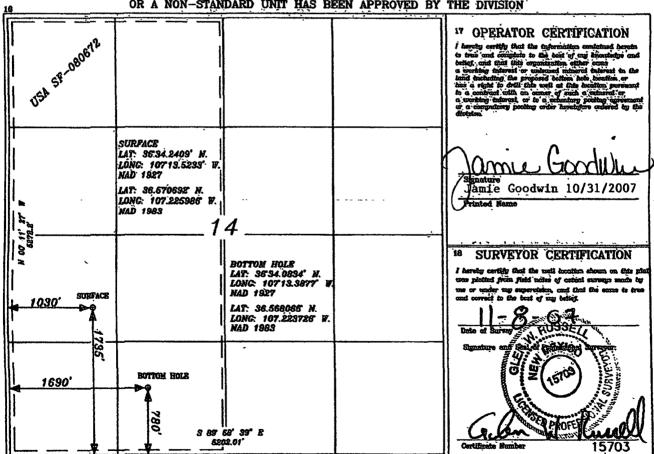

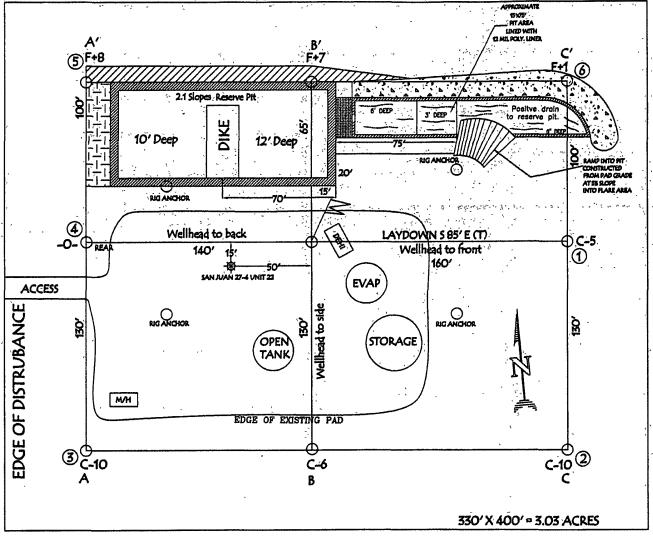

LATITUDE: 36'34.2409' N LONGITUDE: 10743.5233'W NAD27



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client	ConocoPhillips	Project #	96052-0026
Sample ID	SJ 27-4 #22M	Date Reported	11-10-08
Laboratory Number	48004	Date Sampled	10-30-08
Chain of Custody No	5660	Date Received	11-03-08
Sample Matrix	Soil	Date Extracted	11-05-08
Preservative	Cool	Date Analyzed	11-06-08
Condition	Intact	Analysis Requested	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	55.0	0.1
Total Petroleum Hydrocarbons	55.0	0.2

ND - Parameter not detected at the stated detection limit

References

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996

Comments

Drilling Pit Sample.

Analyst

Review

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc com envirotech-inc com



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client	QA/QC	Project #	N/A
Sample ID	11-06-08 QA/QC	Date Reported	11-10-08
Laboratory Number	47948	Date Sampled	N/A
Sample Matrix	Methylene Chloride	Date Received	N/A
Preservative	N/A	Date Analyzed	11-06-08
Condition	N/A	Analysis Requested	TPH

The second secon	I-Cal Date	I-Cal RF:	C-Cal RF:	% Difference	Accept Range
Gasoline Range C5 - C10	05-07-07	1 0002E+003	1 0006E+003	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	1 0151E+003	1 0155E+003	0.04%	0 - 15%

Blank Conc. (mg/L = mg/Kg)	Concentration	Detection Limit
Gasoline Range C5 - C10	ND	0.2
Diesel Range C10 - C28	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept. Range
Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%
Diesel Range C10 - C28	23.8	23.6	0.8%	0 - 30%

Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept: Range
Gasoline Range C5 - C10	ND	250	246	98.4%	75 - 125%
Diesel Range C10 - C28	23.8	250	264	96.3%	75 - 125%

ND - Parameter not detected at the stated detection limit

References

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996

Comments

QA/QC for Samples 47948, 47949, 47956, 47976 - 47978, 47984, 48004 and 48025.

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client	ConocoPhillips	. Project#	96052-0026
Sample ID	SJ 27-4 #22M	Date Reported	11-10-08
Laboratory Number	48004	Date Sampled	10-30-08
Chain of Custody	5660	Date Received	11-03-08
Sample Matrix	Soil	Date Analyzed	11-06-08
Preservative	Cool	Date Extracted	11-05-08
Condition	Intact	Analysis Requested	BTEX

		Det.
	Concentration	Limit
Parameter	(ug/Kg)	(ug/Kg)
Benzene	4.0	0.9
Toluene	46.7	1.0
Ethylbenzene	1.9	1.0
p,m-Xylene	247	1.2
o-Xylene	33.0	0.9
Total BTEX	333	

ND - Parameter not detected at the stated detection limit

Surrogate Recoveries	Parameter	Percent Recovery
	Fluorobenzene	97.0 %
	1,4-difluorobenzene	97.0 %
	Bromochlorobenzene	97.0 %

References

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996

Comments:

Drilling Pit Sample

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client Sample ID	N/A 11-06-BT QA/QC	Project # Date Reported	N/A 11-10-08
Laboratory Number	47948	Date Sampled Date Received	N/A
Sample Matrix	Soil		N/A
Preservative	N/A	Date Analyzed	11-06-08
Condition	N/A	Analysis	BTEX

Calibration and Detection Limits (ug/L	l-Cal RF	C-Cal RF: Accept Rang	%Diff. je 0 - 15%	Blank Conc	Detect. Limit
Benzene	4 8445E+007	4 8542E+007	0.2%	ND	0.1
Toluene	3 7964E+007	3 8040E+007	0.2%	ND	0.1
Ethylbenzene	2 8695E+007	2 8752E+007	0.2%	ND	0.1
p,m-Xylene	6 1173E+007	6 1295E+007	0.2%	ND	0.1
o-Xylene	2 7903E+007	2 7959E+007	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample Di	uplicate	%Diff.	Accept Range	Detect Limit
Benzene	1.7	1.8	5.9%	0 - 30%	0.9
Toluene	7.1	6.9	2.8%	0 - 30%	1.0
Ethylbenzene	5.5	5.4	1.8%	0 - 30%	1.0
p,m-Xylene	12.7	13.4	5.5%	0 - 30%	1.2
o-Xylene	5.9	5.7	3.4%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample Amo	unt Spiked Spik	ed Sample	% Recovery	Accept Range
Benzene	1.7	50.0	50.7	98.1%	39 - 150
Toluene	7.1	50.0	54.8	96.0%	46 - 148
Ethylbenzene	5.5	50.0	53.5	96.4%	32 - 160
p,m-Xylene	12.7	100	110	97.2%	46 - 148
o-Xylene	5.9	50.0	52.9	94.6%	46 - 148

ND - Parameter not detected at the stated detection limit

References Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996

Comments:

QA/QC for Samples 47948, 47949, 47956, 47977, 47978, 47982 - 47985, and 48004.

Analyst

EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client [.]	ConocoPhillips	Project #:	96052-0026
Sample ID ⁻	SJ 27-4 #22M	Date Reported [.]	11-10-08
Laboratory Number:	48004	Date Sampled [.]	10-30-08
Chain of Custody No:	5660	Date Received:	11-03-08
Sample Matrix:	Soil	Date Extracted.	11-05-08
Preservative:	Cool	Date Analyzed:	11-05-08
Condition	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

466

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample

Analyst



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

Client:	QA/QC	Project #:	N/A
Sample ID:	QA/QC	Date Reported:	11-10-08
Laboratory Number	11-05-TPH.QA/QC 47956	Date Sampled:	N/A
Sample Matrix:	Freon-113	Date Analyzed:	11-05-08
Preservative.	N/A	Date Extracted:	11-05-08
Condition.	N/A	Analysis Needed.	TPH

Calibration	I-Cal Date	್ಲಿÇ-Cal Date	I-Cal RF:	C-Cal RF	% Difference	Accept Range
		11-05-08		1,540		+/- 10%

Blank Conc. (mg/Kg) TPH	oncentration ND	Detection Limit
Duplicate Conc. (mg/Kg)	Sample Duplicate	% Difference Accept Range 6.6% +/- 30%

Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept Range
TPH	171	2,000	1,820	83.9%	80 - 120%

ND = Parameter not detected at the stated detection limit.

References⁻

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978

Comments: QA/QC for Samples 47956, 47980 and 48002 - 48008.

Analyst



Chloride

Client: ConocoPhillips Project #: 96052-0026 SJ 27-4 #22M Date Reported: 11-10-08 Sample ID. Lab ID# 48004 Date Sampled: 10-30-08 Date Received: 11-03-08 Sample Matrix Soil Preservative. Date Analyzed: 11-07-08 Cool Condition. Intact Chain of Custody 5660

Parameter

Concentration (mg/Kg)

Total Chloride

110

Reference:

U S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992

Comments:

Drilling Pit Sample.

Mester Weller

Submit To Appropriate Two Copies	riate District (Office ,		State of New Mexico						Form C-105									
District I 1625 N French Dr	, Hobbs, NM	88240		Energy, Minerals and Natural Resources					1 WELL	ΔDI	ΝO			J	uly 17, 2	2008			
District II									1. WELL API NO. 30-039-30450										
1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd , Aztec, NM 87410						Conserva					Ī	2 Type of L				5 pr	70 /D IDI		
District IV 1220 S St Francis						Santa Fe, N				1.	-	3 State Oil		Lease		⊠ FE	ED/INDI	AN	
		•										SF-080672	2						
		ETION (OR R	<u>ECO</u>	MPL	ETION RE	POF	RT AI	ND	LOG			200				The second constitution of the second constituti	. Sink	1., est
4 Reason for fil	ing											5 Lease Nan San Juan		,	greer	ment Nai	me		
☐ COMPLET	ION REPO	RT (Fill in b	oxes #1	l throu	gh #31	for State and Fe	e well	s only)			İ	6 Well Num		Oiiii					
C-144 CLOS #33, attach this a	nd the plat t										or	22M							
7 Type of Comp ✓ NEW		WORKOVE	пПп	DEEPE	NING	□PLUGBACE	ΚП	DIFFEI	REN	NT RESERV	OIR	OTHER							
8 Name of Oper	ator					<u></u>						9 OGRID				W			
Burlington R		Oil Gas	Comp	any,	LP							14538 11 Pool nam	e or V	/ıldcat					
PO Box 4298, Fa	armington, N	IM 87499										TT TOOT HAID		rnacat					
12.Location	Unit Ltr	Section	- '	Townsl	hip	Range	Lot			Feet from the	ne	N/S Line	Fee	t from	the	E/W L	ıne	County	
Surface: BH:		 				· · · · · · · · · · · · · · · · · · ·							-						
13 Date Spudde	d 14 Date	TD Reach	ed	I 15 D	ate Rio	Released	L		16	Date Comple	eted	(Ready to Pro	duce)		17	Flevatu	one (DF	and RKE	
15 Date Spadde	i i i bai	o i D Reaci	- Cu		7/2008	Released			10	Date Compr	cica	(Ready to 110	aucc)			Γ, GR, et		and Kiki	,,
18 Total Measur	ed Depth of	Well		19 P	lug Bac	k Measured Dep	oth		20	Was Directi	ona	l Survey Made	?	21	Туре	e Electric	and Otl	her Logs	Run
22 Producing In	terval(s), of	this complet	ion - To	p, Bott	tom, Na	me						1		<u> </u>					
23						ING REC	OR				ing								
CASING SI	ZE	WEIGHT	LB /FT	<u> </u>		DEPTH SET			НО	LE SIZE		CEMENTIN	√G RI	ECORL	+	AM	IOUNT	PULLED	-
						···									-				
	<u> </u>					 									+				
24.					LINI	ER RECORD				Т	25		гиві	NG R	ECC	ORD			
SIZE	TOP		BOTT	ЮM		SACKS CEM	ENT				SIZ				R SET				
								-					+						
26 Perforation	record (inte	erval, size, ai	l Id numl	ner)		1		27 /	ACI	D SHOT	FRA	ACTURE, CI	<u> </u> EMEI	NT SO	TIF	EEZE E	TC		
		,,		,						INTERVAL		AMOUNT A							
									-										
										144		<u> </u>							
28							PR	ODII	\overline{C}	ΓΙΟΝ	-	I							
Date First Produc	ction	Pr	oductio	n Meth	od (Fla	wing, gas lift, p						Well Statu	s (Pro	od or S	hut-i	ın)			
Date of Test	Hours T	ested	Chok	e Sıze		Prod'n For Test Period		Oıl -	Bbl	1	Gas	- MCF	V	Vater - 1	3bl		Gas - O	ul Ratio	
Flow Tubing Press	Casing	Pressure		Calculated 24- Oil - Bbl Hour Rate				G	Gas - MCF			Water - Bbl		Oil Gravity - API - (Corr)					
29 Disposition of Gas (Sold, used for fuel, vented, etc.) 30 Test Witnessed By																			
31 List Attachm	ents												1						
32 If a temporar	y pit was use	ed at the wel	, attach	a plat	with the	e location of the	temp	orary pi	t										
33 If an on-site b	ourial was us	sed at the we	II, repoi	rt the e	xact loc	ation of the on-s	site bu	ırial											
		Latitude	36.570	82°N	Long	gitude 107.2621	°W	NAD [] <u>1</u> 9:	27 🖾 <u>1</u> 983									
I hereby certi	fy that the	informati	on she	own o	n botk	sides of this	forn	n is tru	ie c	and compl	ete	to the best o	of my			_	_		
Signature	At (De Jo	a)	llg	Prin Nam	nted ne Ethel Tal	ly	Title:	S	taff Regul	ato	ry Technici	an	Da	te:	2/10	0/10)	
E-mail Addre	ss ethel.t	ally@cond	ocophi	illipsa	com														

ConocoPhillips

Pit Closure Form:	
Date: <u>6/9/09</u>	
Well Name: 5.J. 27-4#2214	numeron.
Footages:	Unit Letter:
Section:, TN, RW, County: _	State:
Contractor Closing Pit: Paul : Saws	
Construction Inspector: $\frac{\mathcal{E}_{c}:=\mathcal{S}_{m}, ++}{\mathcal{E}_{c}:=\mathcal{S}_{m}}$ Inspector Signature: $\frac{\mathcal{E}_{c}:=\mathcal{S}_{m}, ++}{\mathcal{E}_{c}:=\mathcal{S}_{m}}$	Date: 6/9/09

Tally, Ethel

From: Sent: To:

Busse, Dollie L < Dollie L Busse@conocophillips com>

Friday, May 22, 2009 2 17 PM

Busse, Dollie L <Dollie L Busse@conocophillips com>, Becker, Joey W

<Joe W Becker@conocophillips com>, Bonilla, Amanda <Amanda.Bonilla@conocophillips.com>, Bowker, Terry D <Terry D Bowker@conocophillips com>, Chavez, Virgil E

<Virgil E Chavez@conocophillips.com>; 'Gordon Chenault' <gordon@ccinm com>;

GRP SJBU Production Leads <SJBUProductionLeads@conocophillips com>, Hockett, Christy

R < Christy R Hockett@conocophillips com>, Bassing, Kendal R <Kendal R Bassing@conocophillips.com>; Kennedy, Jim R

<JIM R Kennedy@conocophillips com>, 'Larry Thacker' < lthackerccinm@hotmail.com>, Lopez, Richard A < Richard A Lopez@conocophillips com>; Loudermilk, Jerry L </>/>/>, Nelson,

Terry J < Terry J. Nelson@conocophillips com>, O'Nan, Mike J. <Mike J.O'Nan@conocophillips com>, Peace, James T <James T Peace@conocophillips.com>, Pierce, Richard M <Richard M Pierce@conocophillips.com>, Poulson, Mark E <Mark.E Poulson@conocophillips com>; Richards, Brian <Brian Richards@conocophillips com>, Smith, Randall O <Randy O Smith@conocophillips.com>, Stamets, Steve A

<Steve A Stamets@conocophillips com>, 'Thacker, LARRY' < Ithacker@ccinm com>, Work,

Jim A <Jim.A Work@conocophillips com>; Blair, Maxwell O <Maxwell O Blair@conocophillips com>, Blakley, Mac

<Maclovia Blakley@conocophillips com>, Clark, Joni E <Joni E Clark@conocophillips com>, Cornwall, Mary Kay </>, Farrell, Juanita R
Juanita R Farrell@conocophillips com>, Greer,

David A < David A Greer@conocophillips com>, Maxwell, Mary Alice <Mary A Maxwell@conocophillips.com>; McWilliams, Peggy L <Peggy L McWilliams@conocophillips com>, Seabolt, Elmo F <Elmo F Seabolt@conocophillips com>, Silverman, Jason M

<Jason M Silverman@conocophillips com>

Cc:

'sandyb@gobrainstorm net' <sandyb@gobrainstorm net>, 'Madonna'

<paulandson@gobrainstorm.net>; 'Smith Eric (sconsulting eric@gmail com)' <sconsulting eric@gmail com>; 'Norman Faver' <faverconsulting@yahoo com>

Subject:

RE Reclamation Notice -SJ 27-4 22M

Importance:

High

Sorry this ended up being the 22M.

From: Sent:

Busse, Dollie L

Cc:

Friday, May 22, 2009 1:55 PM

To:

Becker, Joey W; Bonilla, Amanda; Bowker, Terry D; Busse, Dollie L; Chavez, Virgil E; 'Gordon Chenault'; GRP:SJBU Production Leads; Hockett, Christy R; Bassing, Kendal R.; Kennedy, Jim R; 'Larry Thacker'; Lopez, Richard A; 'Loudermilk, Jerry L'; Nelson, Terry J; O'Nan, Mike J.; Peace, James T; Pierce, Richard M; Poulson, Mark E; Richards, Brian; Smith, Randall O; Stamets, Steve A; 'Thacker, LARRY'; Work, Jim A; Blair, Maxwell O; Blakley, Mac; Clark, Joni E; 'Cornwall, Mary Kay'; Farrell, Juanita R; Greer, David

A; Maxwell, Mary Alice; McWilliams, Peggy L; Seabolt, Elmo F; Silverman, Jason M

Subject:

sandyb@gobrainstorm.net; Madonna; Smith Eric (sconsulting.eric@gmail.com); 'Norman Faver'

Reclamation Notice -SJ 27-4 22N

Importance:

High

<< File: 27-4 22M REVISED C102 Pkg.pdf >>

Paul & Son Construction will start the reclamation process on the San Juan 27-4 Unit 22M on Thursday, May 28th. The legals and driving directions are attached.

Please contact Eric Smith (608-1387) if you have any questions or concerns.

Network #10217714 - NANN (BR)

Dollie L. Busse

ConocoPhillips Company-SJBU
Projects - Technician
505-324-6104
505-599-4062 (fax)
Dollie.L.Busse@conocophillips.com


"As temperatures rise, stay safety wise"

ConocoPhillips

e2.43

Reclamation Form:	
Date: <u>6/30/09</u>	
Well Name: 27-4#	22M.
Footages:	Unit Letter:
	-N, R- 4 -W, County: Ria Arriba State: n. vn
Reclamation Contractor:	Paul : sons
Reclamation Date:	8/30/09
Road Completion Date:	7/12/09
Seeding Date:	7/13/09
Construction Inspector:	Eric Smith Date: 7/14/09
Inspector Signature:	P. S.



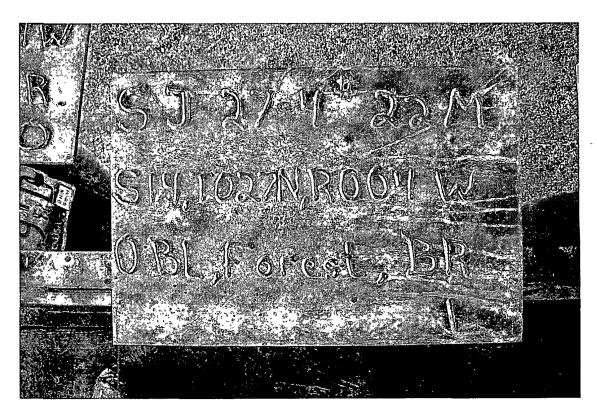

WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

WELL NAME: San Juan 27-4 Unit 22M

API#: 30-039-30450

DATE	INSPECTOR	SAFETY CHECK	LOCATION CHECK	PICTURES TAKEN	COMMENTS
6/11/08	Rodney Woody	X	Х		Pit & loc Look good
6/18/08	Rodney Woody	X ;	Х		Pit & loc. Look good
6/25/08	Rodney Woody	X	Х		Pit & loc Look good
7/2/08	Rodney Woody	X	Х		Pit & loc Look good
7/9/08	Rodney Woody	X	Х	-	Pit & loc Look good
7/23/08	Rodney Woody	X	Х		Pit & loc. Look good
7/30/08	Rodney Woody	X	7,		H&P 282 on loc.
8/6/08	Rodney Woody	X			H&P 282 on loc
8/13/08	Rodney Woody	X	Х		CROSSFIRE TO REPAIR HOLES
8/20/08	Rodney Woody	X	Х		CROSSFIRE TO PATCH HOLES
9/16/08	Rodney Woody	X	Х	-	Pit & loc Look good
10/6/08	Rodney Woody	X	Х		CROSSFIRE TO REPAIR HOLES & KEY LINER
10/21/08	Rodney Woody	X	Х		DWS ON LOC
2/17/09	Rodney Woody	X	Х		Pit & loc Look good
3/26/09	Art Sanchez	X	Х	Х	Called Crossfire to repair fence
4/15/09	Art Sanchez	X	Х	Х	
4/30/09	Jared Chavez	X	Х		Repair Burt Liner Re-Key JEG
5/8/09	Jared Chavez	Х	Х		Re- Key Liner JEG
5/21/09	Jared Chavez	Х	Х		Location is good JEG
5/27/09	Jared Chavez	X	X		Location is good JEG

SAN JUAN 27-4 UNIT 22M API# 30-039-30450 PICTURES OF RECLAMATION PERMIT # 5229



