<u>Ďistriet I</u> 1625 N. French Dr., Hobbs, NM 88240 District III

District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division

1220 South St Francis Dr. Santa Fe, NM 87505

Pit, Closed-Loop System, Below-Grade Tank, or

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

| Proposed Alternative Method Permit or Closure Plan Application |
|---|
| Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, |
| below-grade tank, or proposed alternative method |
| Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. |
| Operator WILLIAMS FOUR CORNERS, LLC OGRID# |
| Address. 188 CR 4900 BLOOMFIGLD NM 87413 |
| Facility or well name NEBLANCO UNIT #304 (PC) |
| API Number. 3003924163 OCD Permit Number |
| U/L or Qtr/Qtr M Section 30 Township 31 N Range 6 W County RIO ARRIGA Center of Proposed Design: Latitude Longitude NAD. 1927 1983 |
| Center of Proposed Design: Latitude Longitude NAD. 1927 1983 |
| Surface Owner 🔲 Federal 🔲 State 🗀 Private 🗀 Tribal Trust or Indian Allotment |
| ☐ Pit: Subsection F or G of 19 15.17.11 NMAC Temporary ☐ Drilling ☐ Workover ☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Lined ☐ Unlined Liner type. Thickness |
| ☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other3456786 |
| Liner Seams: Wolded Factory Other |
| May 2011 May 2011 |
| 5 Alternative Method: Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval |

| Fencing: Subsection D of 19 15 17 11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, height are to be at the content of the cont | r Irognital |
|--|-----------------------------|
| institution or church) | ноѕрнан, |
| Four foot height, four strands of barbed wire evenly spaced between one and four feet | |
| Alternate. Please specify | |
| Netting: Subsection E of 19 15 17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other | |
| Monthly inspections (If netting or screening is not physically feasible) | |
| 8 | |
| Signs: Subsection C of 19 15.17 11 NMAC | |
| 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers | |
| Signed in compliance with 19 15 3 103'NMAC | |
| Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15 17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s). Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. | office for |
| Siting Criteria (regarding permitting): 19 15 17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system. | priate district pproval. |
| Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank - NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells | ☐ Yes ☐ No |
| Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) - Topographic map, Visual inspection (certification) of the proposed site | Yes No |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image | ☐ Yes ☐ No ☐ NA |
| Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | ☐ Yes ☐ No ☐ NA |
| Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site | ☐ Yes ☐ No |
| Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval obtained from the municipality | ☐ Yes ☐ No |
| Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site | ☐ Yes ☐ No |
| Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division | ☐ Yes ☐ No |
| Within an unstable area. Engineering measures incorporated into the design. NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map | ☐ Yes ☐ No |
| Within a 100-year floodplain - FEM∆ map | ☐ Yes ☐ No |

| Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC |
|---|
| Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15 17 9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17 9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17 10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17 11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC |
| Previously Approved Design (attach copy of design) API Number or Permit Number |
| Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 15.17 9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19 15.17 11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17 12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17 9 NMAC and 19 15 17 13 NMAC |
| Previously Approved Design (attach copy of design) API Number |
| Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use |
| above ground steel tanks or haul-off bins and propose to implement waste removal for closure) |
| Permanent Pits Permit Application Checklist: Subsection B of 19 15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19 15 17 9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17 10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19 15 17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19 15 17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19 15 17 11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15 17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monttoring and Inspection Plan Erosion Control Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19 15.17.9 NMAC and 19 15 17 13 NMAC |
| Proposed Closure: 19 15 17 13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. |
| Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) |
| Waste Excavation and Removal Closure Plan Checklist: (19.15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19 15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC |

| Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19 15 17 13 1 | O NMAC) |
|--|-----------------------|
| Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required. | nore than two |
| Disposal Facility Name Disposal Facility Permit Number | |
| Disposal Facility Name Disposal Facility Permit Number | |
| Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future ser Yes (If yes, please provide the information below) No | |
| Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19 15.17 13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC | С |
| Siting Criteria (regarding on-site closure methods only): 19 15 17 10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable south provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate distance considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Just demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. | rict office or may be |
| Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby wells | ☐ Yes ☐ No ☐ NA |
| Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - tWATERS database search, USGS; Data obtained from nearby wells | ☐ Yes ☐ No ☐ NA |
| Ground water is more than 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells | ☐ Yes ☐ No ☐ NA |
| Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site | ☐ Yes ☐ No |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image | ☐ Yes ☐ No |
| Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site | ☐ Yes ☐ No |
| Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978. Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality | ☐ Yes ☐ No |
| Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | ☐ Yes ☐ No |
| Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division | ☐ Yes ☐ No |
| Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society; Topographic map | ☐ Yes ☐ No |
| Within a 100-year floodplain - FEMA map | ☐ Yes ☐ No |
| On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure p. by a check mark in the box, that the documents are attached Stung Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15 17 11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19 Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC | 15.17 11 NMAC |

| Dperator Application Certification: | |
|--|---|
| I hereby certify that the information submitted with this application is true, accur | rate and complete to the best of my knowledge and belief |
| Name (Print) | Title |
| Signature | Date. |
| e-mail address | Telephone |
| 20. OCD Approval: Permit Application (including closure plan) Closure E | l'an (only) [] OCD Conditions (see attachment) |
| OCD Representative Signature: | Approval Date: 10/20/20(1 |
| OCD Approval: Permit Application (including closure pain) A Closure Parmit Application (including closure parmit | OCD Permit Number: |
| Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior The closure report is required to be submitted to the division within 60 days of section of the form until an approved closure plan has been obtained and the continuous continuo | K of 19 15 17 13 NMAC to implementing any closure activities and submitting the closure report. the completion of the closure activities. Please do not complete this |
| 22 | |
| Closure Method: Waste Excavation and Removal On-Site Closure Method Altern If different from approved plan, please explain Excavation material. | ative Closure Method Waste Removal (Closed-loop systems only) WAS LANDFARMED, SAMPLED, AND RETURNED AS CLEAN FILL |
| 23 Closure Report Regarding Waste Removal Closure For Closed-loop Systems | s That Utilize Above Ground Steel Tanks or Haul off Rins Only |
| Instructions: Please indentify the facility or facilities for where the liquids, dri | |
| two facilities were utilized. Disposal liggibity Name | Disposal Facility Permit Number. |
| Disposal Facility Name Disposal Facility Name | |
| Were the closed-loop system operations and associated activities performed on or Yes (If yes, please demonstrate compliance to the items below) \(\square\$\square\$ No | |
| Required for impacted areas which will not be used for future service and operat Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique | ions. |
| 24 Closure Report Attachment Checklist: Instructions: Each of the following it | tams must be attached to the closure report. Please indicate by a check |
| mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique | ems must be anachea to the closure report. Trease matches, by a check |
| On-site Closure Location LatitudeLongi | tude NAD: |
| Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure requirer | |
| Name (Print) MARKHARVEY | Title PROJECT COORDINATOR |
| e-mail address markhaditell, con | Date 4-29-11 |
| e-mail address markhaditell, com | Telephone 505-402-1958 |



Williams Four Corners, LLC

Closure Plan for Below Grade Tanks

San Juan Basin - New Mexico

Background

Following promulgation of 19.15.17 NMAC also known as the Pit Rule, Williams has developed this Closure Plan to comply with requirements related to the retirement of certain below grade tanks (BGTs). The plan will be used when closing BGT locations near term, and for all BGTs which are required to be closed by June 15, 2013. This plan shall also be used when closing any other BGT operated by Williams.

Certain below grade tanks targeted under this closure plan were, in some cases, installed subsequent to earthen pit closures and were constructed in conformance with NMOCD approved criteria. All BGTs have been operating in general compliance with NMOCD regulations developed prior to the new Pit Rule of June 2008.

Applicability

This plan shall be implemented when any BGT is retired or removed from service due to operational considerations or when tank integrity is compromised beyond repair. Closure shall commence within 60 days of cessation of use or sooner if directed by NMOCD.

The plan shall also be used if any leaking BGT is not retrofitted or modified to comply with applicable design criteria defined in the Pit Rule or when it is determined that continued operation of the BGT represents an imminent danger to fresh water, human health or the environment. All BGTs with or without completely visible sidewalls, and that do not meet current design standards, shall be closed prior to sale, transfer, or change of Operator or be retrofitted to meet current design standards. In any event, all single walled tanks without completely visible sidewalls shall be closed by June 15, 2013 in accordance with the provisions herein.

If there are conditions at a BGT location which prevent or limit adherence to this plan, a separate site specific plan will be developed. Such a plan will be prepared and submitted to the NMOCD for approval and serve as a new, site specific closure plan.

Description of Work

Prior to initiating BGT closure work, notification will be made to the NMOCD Aztec Office 3-7 days before work is scheduled. In addition, the landowner of record (obtained through county tax records) will be notified in advance by certified mail with return receipt. Notifications will provide operator identity, and legal location of the BGT, and the well name / number and API number if the BGT is associated with a well. Notification to NMOCD will be made via email or by phone. If prudent, and contingent upon work schedules and manpower assignments, more than one location may be included in a single communication.

Discharge to the BGT will be eliminated and all piping removed or re-routed as appropriate. The liquid contents in the tank will be removed and shipped for disposal at an NMOCD approved and permitted facility. Williams may utilize other facilities which may be approved by the NMOCD in the future. As such, the selected disposal site will be identified on the closure form (C-144) prepared for each discrete closure action.

The table below provides a list of waste materials and the facility proposed for disposal or recycling:

Table 1

| Steel Tank | SJ County Landfill or Steel Recycling |
|--|--|
| Fiberglass Tank | SJ County or Bondad Landfill * or Re-use |
| Liner (cleaned - absent soil / sludge) | SJ County or Bondad Landfill |
| Sludge | Envirotech, IEI, TNT, or Bondad Landfill |
| Liquids (Water / Hydrocarbons) | Basin Disposal, Key Energy, TNT |
| Contaminated Soil | Envirotech, IEI, TNT, or Bondad Landfill |
| Fencing / Miscellaneous | Re-use or scrap |

*the tank must be empty, cut up or shredded and EPA clean

Permit Numbers and additional approved facilities are listed on the attached spreadsheet.

The use of any disposal or recycling facility will be identified on the C-144 form submitted to the NMOCD as part of the closure report. Any and all ancillary equipment related to the tank will also be removed, including any synthetic liner material(s) and fencing. Williams will ensure that liners and liner material will be free of soil and sludge material and disposed of at a NMOCD approved solid waste facility (e.g. San Juan County Landfill or Permitted CO Facility).

Steel or fiberglass tanks will be removed and shipped to a Williams storage yard where the condition of each tank will be evaluated for recycling, reuse, or disposal, subject to NMOCD approval. If the tank is not in a condition allowing reuse, it will either be shipped to a permitted recycling facility (for steel tanks) or it will be disposed of at the San Juan County Landfill (NMED Permit SWM-052426) or other NMOCD approved solid waste disposal site. Specific waste acceptance conditions of the landfill could necessitate further actions as appropriate. Such actions include, but may not be limited to, cutting, shredding, or sizing; emptying or cleaning of tanks or liner material, and otherwise those necessary to conform with permit conditions for Subtitle D disposal and conditions identified in 19.15.35.8 NMAC.

After the tank and equipment have been removed, soils beneath the tank will be tested and evaluated to determine if there is hydrocarbon impact or otherwise if a release event has occurred. Specific sampling protocol will follow the description provided in the Pit Rule which calls for a five point composite sample (see Sampling and Lab Analyses section). Additional grab samples will be collected if there is obvious staining, or when wet or discolored soil exists, or if there is other evidence of soil impact(s). Samples will be shipped to an off-site environmental testing laboratory for proper analyses. Results will be submitted to the NMOCD on form C-141. Further sampling may be required if NMOCD determines additional assessment work is necessary.

If there has been no release to underlying soils as demonstrated by soil analyses (i.e. lab results), or if impacts are below closure limits provided in the table below, then the depression (i.e.excavation) will be backfilled with "non-waste containing" fill material. Depending on site conditions and operating needs, the backfilled area will be reclaimed with prescribed topsoil and reseeded.

If NMOCD or Williams determines a release event has occurred, Williams will comply with 19.15.29 and / or 19.15.30 as appropriate. If analyses of soils excavated in conjunction with the BGT removal should reveal contaminant concentrations at or below specified closure limits (see Table 2 below), then the soil may be returned to the excavation and covered with prescribed soil cover. Sampling of the excavated material is detailed in the Sampling and Laboratory Analyses section later in this plan.

Due to the fact that most of Williams BGTs are located on active well sites, reclamation efforts may be deferred in order to avoid impact to ongoing lease operations. In this event, the area of the retired BGT will be incorporated into the overall well site reclamation effort with Williams documenting surface owner and lease operator approval of the proposed alternative.

The BGT site will nevertheless be prepared to prevent erosion, and protect fresh water, human health, and the environment. Williams will submit this documentation to the NMOCD for approval.

Restoration efforts shall incorporate proper contouring as described in the Pit Rule and shall be constructed in a manner to prevent ponding and erosion, using drainage controls such as water bars and/or silt traps as appropriate Soil cover (suitable for vegetative growth) will be equivalent to the background thickness of topsoil or minimum one foot depth (or background thickness whichever is greater). The area will be contoured in a manner blending soil into/with the surrounding grade. Reclamation shall target the location of the BGT along with associated access roads (not used for production operations) and be implemented to ensure a safe and stable condition that blends with the surrounding undisturbed area.

Re-vegetation efforts will conform with NMOCD approved methods and recommendations including seed type and application rates and shall effect cover equaling 70% of native perennial vegetation. Re-vegetation shall establish at least three native plant species, including at least one grass, but not including any noxious weeds, through two successive growing seasons. Seeding will be accomplished by drilling on the contour whenever practicable or by other NMOCD approved methods.

Seeding efforts will be initiated during the first growing season after closure work is approved and be repeated until re-vegetation is successful. Notification will be made to NMOCD anytime seeding efforts begin and when successful re-vegetation is sustained. Adverse growing conditions (e.g. drought, etc.) may cause delay until conditions are more favorable or necessitate enhanced cultivation techniques (e.g. mulching, irrigating, etc.) as approved by NMOCD.

Sampling and Laboratory Analyses

A minimum five point composite sample shall be collected from the soils beneath the below grade tank and one or more grab samples from each area that is wet, discolored or showing other evidence of a release. Sampled soil will be placed in clean glass jars and cooled and maintained at 39°F. Samples will be packaged and shipped under USEPA Chain-of-Custody protocol to an approved and certified environmental laboratory.

Soil samples collected from the earthen containment (i.e. BGT excavation) will be analyzed by an approved environmental laboratory by the listed test methods or as may be directed by the NMOCD. The following table lists the contaminants of concern, testing methods, and the closure limits defining action levels:

Table 2

| Contaminant | Test Methods | Closure Limits (mg/Kg) |
|-------------|----------------------------------|------------------------|
| Benzene | EPA SW-846 Method 8021B or 8260B | 0.2 |
| BTEX | EPA SW-846 Method 8021B or 8260B | 50 |
| TPH | Method 418.1++ | 100 |
| Chlorides | EPA SW-846 Method 300.1 | 250* |

^{*} Or background concentration – whichever is greater

In the event soil is found to have contaminants in excess of the action levels above, requirements of 19 15 29 NMAC and 19 15.30 NMAC shall dictate further actions. Such action would likely include development of a Remedial Action Plan or Abatement Plan as specified under those Rules ++ Not currently used USEPA Method (Replaced by Method 1664). Method 418 1 is required by NMOCD.

Sampling of any excavated or stockpiled material shall conform with standard environmental sampling protocol. Samples from excavated materials (excavated to facilitate the BGT removal) will be composite samples comprised of at least five discrete samples from the inside and on the surface of the soil pile. A minimum of one composite will be collected from each 25 cubic yards of soil (i.e. one fraction from each cubic yard). Every effort will be made to collect composite fractions from the inside and outside of the soil pile such that a "representative" sample is analyzed.

Rev 4-06-10

Stockpile sampling will be facilitated by utilizing a clean soil probe inserted into the soil pile at least three feet or by turning the soil pile with mechanized equipment to expose new soil. The goal is to collect a sample representative of the "whole". These samples will be handled and packaged as described above and be analyzed by the methods listed in Table 2. Soil with contaminant concentrations at or below the Closure Limits may be returned to the BGT excavation prior to initiating reclamation work.

Records and Documentation

All closure activities will be properly documented and include preparation of Form C-144 which shall be submitted to the NMOCD within 60 days of completing closure tasks. Information to be included in the closure report filing shall include, but not necessarily be limited to, the following:

- Proof of closure notice to division and surface owner(s)
- Confirmation sampling and analytical reports (results)
- Disposal facility name and permit information
- Description of capping and reclamation actions (i.e. revegetation rates)
- Photo documentation of site reclamation
- Other information required to complete applicable sections of C-144

As stated above, should conditions at any location necessitate a change to the approach described herein, separate site specific closure details will be provided as an addendum to this plan.

| mit No | | Untraine | County | achiyiyanta | Legale |
|--------|--|-----------------|------------|---|----------------|
| 19 | GANDY MARLEY INC | 10/06/1994 | Chaves | GANDY MARLEY LANDFARM | -4-11 S-31 E |
| 28 | OLD LOCO OIL CO | 07/02/1985 | Eddy | OLD LOCO TREATING PLANT | -19-17 6-31 E |
| 43 | Loco Hills Landfarm LLC | 11/08/2004 | Eddy | Loco Hills Landfarm | m-32-16 S-30 E |
| 4 | LOCO HILLS WATER DISPOSAL | 10/30/1981 | Eddy | LOCO HILLS WATER DISPOSAL | M-16-17 S-30 E |
| 36 | OK HOT OIL SERVICE INC | 08/16/2000 | Eddy | OK HOT OIL SERVICES INC | O-14-17 S-28 E |
| 24 | CHAPARRAL SWD | 01/31/1995 | Lea | CHAPARRAL TREATING PLANT | B-17-23 S-37 E |
| 35 | LEA LAND INC | 01/05/2000 | Lea | LEA LAND LANDFILL | -32-20 S-32 E |
| 12 | C&C LANDFARM INC | 11/16/1992 | Lea | C&C LANDFARM | B-3-20 S-37 E |
| 13 | ENVIRONMENTAL PLUS INC | 02/15/1993 | Lea | ENVIRONMENTAL PLUS LANDFARM | -14-22 S-37 E |
| 15 | GOO YEA LANDFARM INC | 11/16/1992 | Lea | GOO YEA LANDFARM | -14-11 S-38 E |
| 23 | J&L LANDFARM INC | 05/10/1998 | Lea | J&L LANDFARM | -9-20 S-38 E |
| 25 | GANDY CORP | 06/27/1973 | Lea | Gandy Corp. Treating Plant | -11-10 S-35 E |
| 26 | JENEX OPERATING CO | 09/21/1983 | Lea | JENEX TREATING PLANT | D-14-20 S-38 E |
| 30 | ARTESIA AERATION LLC | 06/29/1999 | Lea | ARTESIA AERATION LANDFARM | -7-17 S-32 E |
| 32 | SOUTH MONUMENT SURFACE WASTE FACILITY LLC | 10/04/1999 | Lea | SOUTH MONUMENT LANDFARM | A-25-36 S-20 E |
| 33 | DOOM LANDFARM | 04/03/2000 | Lea | DOOM LANDFARM | g-5-25 S-37 E |
| 34 | DD LANDFARM INC | 04/12/2000 | Lea | DD LANDFARM | -31-21 S-38 E |
| 21 | RHINO OILFIELD DISPOSAL INC | 11/17/1997 | Lea | RHINO OILFIELD LANDFARM | -34-20 S-38 E |
| 44 | COMMERCIAL EXCHANGE, INC. | 11/01/2004 | Lea | Blackwater Oil Reclamation Facility | d-1-25 S-37 E |
| 39 | PITCHFORK LANDFARM LLC | 10/30/2002 | Lea | PITCHFORK LANDFARM | A-6-24 S-34 E |
| 6 | CONTROLLED RECOVERY INC | 04/27/1990 | Lea | CONTROLLED RECOVERY | -27-20 S-32 E |
| 42 | COMMERCIAL EXCHANGE, INC. | 07/22/2004 | Lea | Blackwater Landfarm | f-1-25 S-37 E |
| 38 | SAUNDERS LANDFARM LLC | 10/28/2002 | Lea | SAUNDERS LANDFARM | M-7-14 S-34 E |
| 41 | LAZY ACE LANDFARM LLC | 03/09/2004 | Lea | LAZY ACE LANDFARM | M-22-20 S-34 E |
| 3 | SUNDANCE SERVICES, INC. | 08/30/1977 | Lea | SUNDANCE PARABO | m-29-21 S-38 E |
| 37 | COMMERCIAL EXCHANGE, INC. | 03/31/2003 | Lea | COMMERCIAL SURFACE WM FACILITY | A-1-20 S-36 E |
| 8 | T-N-T ENVIRONMENTAL INC | 01/19/1987 | Rio Arriba | TNT EVAP POND/LANDFARM | -8-25 N-3 W |
| 11 | ENVIROTECH INC | 07/07/1992 | San Juan | ENVIROTECH LANDFARM #2 | -6-26 N-10 W |
| 9 | KEY FOUR CORNERS INC | 04/02/1991 | San Juan | KEY EVAP POND and Landfarm | E-2-29 N-12 W |
| 10 | JFJ LANDFARM LLC | 07/22/2002 | San Juan | JFJ Land Farm Crouch Mesa (Formerly Tlerra) | J-2-29 N-12 W |
| 5 | BASIN DISPOSAL INC | 10/16/1987 | San Juan | BASIN DISPOSAL EVAP, POND | F-3-29 N-11 W |



April 15, 2011

Mr. Mark Kelly USBLM – Farmington District 1235 La Plata Highway, Suite A Farmington, NM 8701

RE: NOTICE OF BELOW GRADE TANK CLOSURE - NEBU #304

Dear Mr. Kelly:

Pursuant to the requirements of the New Mexico Oil Conservation Division (OCD), Williams hereby provides notice of the intent to retire and close two below grade tanks (BGT) at the NEBU #304 well site. The site is located in Unit M, Section 30, Township 31N, Range 6W and further identified with API #3003924163. The below grade tanks have been used to capture liquids from dehydrator discharge(s).

Both tanks are now out of service and will be closed consistent with the Williams Closure Plan for Below Grade Tanks approved by the OCD. A copy of the plan was previously submitted to your office. Work is scheduled to commence within the next week, weather permitting.

If you have any questions regarding the nature and extent of work, or the exact field schedule, please call Aaron Dailey at (505) 634-4708 or you may reach me at 505-402-1958.

Respectfully,

Mark Harvey

Project Coordinator

Enclosure

I DO HEREBY CERTIFY that this document was sent by CERTIFIED MAIL to the named recipient at the address above on 4-15-11 By 10-11

District I
1625 N French Dr., Hobbs, NM 88240
District II
1301 W Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back

Form C-141

side of form

Revised October 10, 2003

Release Notification and Corrective Action

| | | | | | | OPERA | ГOR | | Initia | ıl Report | X | Final Repor |
|---|---|--|---|---|---------------------------------------|--|---|--|--|--|--|-------------------------------------|
| Name of Co | mpany 6 | JILLIAMS | FOUR | CORNERS, LL | ر (| Contact | AARON DAIL | EY | | | | |
| Address | | | | TELD, NM 87 | | | No. 505-63 | | 8 | | | |
| Facility Nar | ne Ne (| BLANCO # | 304 B | GT CONTAINM | 16ST 1 | Facility Typ | е | | | | | |
| Surface Ow | ner <i>US</i> G | 3cm | | Mineral C | Owner | | | | Lease N | lo | | |
| | | | | LOCA | ATION | OF REI | LEASE | | | | | |
| Unit Letter | Section | Township | Range | Feet from the | | South Line | Feet from the | East/Wes | st Line | County | | |
| M | 30 | 311 | 6W | | | | | | | RIOAR | RIBA | 4 |
| | | | La | titude | | Longitud | le | | | | | |
| | | | | NAT | TURE | OF REL | EASE | | | | | |
| Type of Rele | | ER + CON | | ē | | | Release < 1 B | | | Recovered | | |
| | | FLOWOF | BGT | | | | Hour of Occurrence | ce D | Date and | Hour of Disc | covery - | 4-21-11 |
| Was Immedi | ate Notice C | | Yes [| No 🛭 Not R | equired | If YES, To | Whom? | | | | | |
| By Whom ⁹ | | | | | | Date and H | Iour | | | | | |
| Was a Water | course Reac | hed? | | | | | olume Impacting | the Waterce | ourse | | | |
| | | | Yes 🔀 | 1 No | | , | , 0 | | | | | |
| Describe Are | Alfected a DVEN EXMINED S BACKFORD | and Cleanup A KCA JATE SOILS W/ CEO ANO C | Action Tal O SOLL VARYIII | IVE ACTION | 11/0 TI OF 1M W/ OO | ANK ANC PACT AN CO APPRO | WITHIN CO DLANDFARM WED BGT CL | NTAIN. ASTACO | MENT ENT TO CAN - | - ANGA. O CONTAI | √ME | |
| regulations a public health should their of or the environ | Il operators or the environment in a perations had annent in a | are required to rominent. The ave failed to a | o report an acceptant adequately OCD accep | nd/or file certain i ce of a C-141 report investigate and interaction | release no ort by the remediate | otifications a NMOCD m contaminati | nd perform correct parked as "Final Ricon that pose a three the operator of | ctive action Report" doe reat to grou responsibil | ns for release not release to the second water that the second se | eases which leve the oper r, surface wa ompliance w | may en ator of ter, hui ath any | ndanger `lıabılıty man health |
| , , , , , , , , , , , , , , , , , , , | | Λ | | | | | OIL CON | <u>SERVA</u> | TION | DIVISIO | N | |
| Signature | W.: | 1 Jun | S | | | | | | | | | |
| Printed Name | MARI | L HARVO | | | | Approved by | District Supervis | sor | | | | |
| Title PR | OJECT (| COORDIN | ATOR | | | Approval Da | le | Ex | piration | Date | | |
| E-mail Addr | | rhh od | tell. | COM | | Conditions o | f Approval | | | Attached | | |
| Date 4-7 | 29 - H tional Shed | ets If Necess | Phone arv | 505-402-10 | 158 | | | | | | | |





ANALYTICAL RESULTS

ASSESS,

Project

NM BGTS NEBU 304

NORTH PIT NESU 304 PC

Pace Project No 6095320

Sample: 165407MAR11 Lab ID: 6095320001 Collected 03/07/11 16 54 Received 03/16/11 09 05 Matrix. Solid

Results reported on a "dry-weight" basis

| Parameters | Results Units | Report Limit | DF | Prepared | Analyzed | CAS No | Qual |
|------------------------------|---------------------------|-------------------|---------|----------------|----------------|------------|------|
| 8260 MSV 5035A VOA | Analytical Method EPA 826 | 0 | | | | | |
| Benzene | 8160 ug/kg | 6180 | 1000 | | 03/19/11 13 38 | 71-43-2 | |
| Ethylbenzene | 25300 ug/kg | 6180 | 1000 | | 03/19/11 13 38 | 100-41-4 | |
| Toluene | 181000 ug/kg | 6180 | 1000 | | 03/19/11 13 38 | 108-88-3 | |
| Xylene (Total) | 296000 ug/kg | 6180 | 1000 | | 03/19/11 13 38 | 1330-20-7 | |
| Dibromofluoromethane (S) | 101 % | 68-129 | 1000 | | 03/19/11 13 38 | 1868-53-7 | |
| Toluene-d8 (S) | 107 % | 81-121 | 1000 | | 03/19/11 13 38 | 2037-26-5 | |
| 4-Bromofluorobenzene (S) | 99 % | 75-131 | 1000 | | 03/19/11 13 38 | 460-00-4 | |
| 1,2-Dichloroethane-d4 (S) | 103 % | 77-131 | 1000 | | 03/19/11 13 38 | 17060-07-0 | |
| Percent Moisture | Analytical Method ASTM D | 2974-87 | | | | | |
| Percent Moisture | 21.5 % | 0 50 | 1 | | 03/18/11 00 00 | | |
| 9071 HEM TPH in Soil | Analytical Method EPA 907 | 1B Preparation Me | ethod E | PA 9071B | | | |
| Total Petroleum Hydrocarbons | ND mg/kg | 320 | 1 | 03/18/11 00 00 | 03/21/11 00:00 | | |
| 300.0 IC Anions 28 Days | Analytical Method EPA 300 | .0 | | | | | |
| Chloride | ND mg/kg | 127 | 10 | | 03/23/11 11 24 | 16887-00-6 | |

RELEASE CONFIRMED

Date 03/23/2011 04 50 PM

REPORT OF LABORATORY ANALYSIS

Page 5 of 14

This report shall not be reproduced, except in full, without the written consent of Pace Analytical Services, Inc







CONFIRMATION

ANALYTICAL RESULTS

Project

WFS-BGTS SADIE IA, NEBU304

NEBU 304N (Exc)

Pace Project No

6097647

| Sample: 150121APR11 | Lab ID: 6097647003 | Collected | 04/21/11 15 01 | Received | 04/23/11 08.30 | Matrix Solid |
|---------------------|--------------------|-----------|----------------|----------|----------------|--------------|

Results reported on a "dry-weight" basis

| Parameters | Results Uni | rts Report Limit | DF | Prepared | Analyzed | CAS No | Qual |
|------------------------------|-----------------------|------------------------|---------------------|----------------|----------------|------------|------|
| 8260 MSV 5035A VOA | Analytical Method EP | A 8260 | | | | | |
| Benzene | ND ug/kg | 5 6 | 1 | | 04/26/11 12 27 | 71-43-2 | |
| Ethylbenzene | ND ug/kg | 5 6 | 1 | | 04/26/11 12 27 | 100-41-4 | |
| Toluene | ND ug/kg | 5 6 | 1 | | 04/26/11 12 27 | 108-88-3 | |
| Xylene (Total) | ND ug/kg | 5 6 | 1 | | 04/26/11 12 27 | 1330-20-7 | |
| Dibromofluoromethane (S) | 104 % | 68-129 | 1 | | 04/26/11 12 27 | 1868-53-7 | |
| Toluene-d8 (S) | 92 % | 81-121 | 1 | | 04/26/11 12 27 | 2037-26-5 | |
| 4-Bromofluorobenzene (S) | 96 % | 75-131 | 1 | | 04/26/11 12 27 | 460-00-4 | |
| 1,2-Dichloroethane-d4 (S) | 99 % | 77-131 | 1 | | 04/26/11 12 27 | 17060-07-0 | |
| Percent Moisture | Analytical Method. AS | TM D2974-87 | | | | | |
| Percent Moisture | 11.3 % | 0 50 | 1 | | 04/26/11 00 00 | | |
| 9071 HEM TPH in Soil | Analytical Method EP | A 9071B Preparation Me | thod [.] E | EPA 9071B | | | |
| Total Petroleum Hydrocarbons | ND mg/kg | 284 | 1 | 04/27/11 00 00 | 04/27/11 00 00 | | |
| 300.0 IC Anions 28 Days | Analytical Method EP | A 300.0 | | | | | |
| Chloride | ·ND mg/kg | 113 | 10 | | 04/26/11 01 54 | 16887-00-6 | |

Date 04/27/2011 05.11 PM

REPORT OF LABORATORY ANALYSIS

Page 7 of 15







CONFIRMATION

ANALYTICAL RESULTS

Project:

WFS-BGTS SADIE IA, NEBU304

NEBU 3045 (LF)

Pace Project No.: 6097647

Sample: 172021APR11 Lab ID: 6097647005 Collected: 04/21/11 17:20 Received. 04/23/11 08:30 Matrix: Solid

Results reported on a "dry-weight" basis

| Parameters | Results | Units | Report Limit | DF | Prepared | Analyzed | CAS No. | Qual | |
|------------------------------|--|--------------|-------------------|----|----------------|----------------|------------|------|--|
| 8260 MSV 5035A VOA | Analytical Method | d: EPA 8260 | | | | | | | |
| Benzene | ND ug/kg | 3 | , 5.8 | 1 | | 04/26/11 12:57 | 71-43-2 | | |
| Ethylbenzene | ND ug/kg | 3 | 5.8 | 1 | | 04/26/11 12:57 | 100-41-4 | | |
| Toluene | ND ug/kg |) | ¹ ″ 58 | 1 | | 04/26/11 12.57 | 108-88-3 | | |
| Xylene (Total) | ND ug/kg | 3 | 5.8 | 1 | | 04/26/11 12:57 | 1330-20-7 | | |
| Dibromofluoromethane (S) | 110 % | | 68-129 | 1 | | 04/26/11 12.57 | 1868-53-7 | | |
| Toluene-d8 (S) | 92 % | | 81-121 | 1 | | 04/26/11 12:57 | 2037-26-5 | | |
| 4-Bromofluorobenzene (S) | 95 % | | 75-131 | 1 | | 04/26/11 12.57 | 460-00-4 | | |
| 1,2-Dichloroethane-d4 (S) | 108 % | | 77-131 | 1 | | 04/26/11 12:57 | 17060-07-0 | | |
| Percent Moisture | Analytical Method ASTM D2974-87 | | | | | | | | |
| Percent Moisture | 15.2 % | | 0.50 | 1 | | 04/26/11 00:00 | | | |
| 9071 HEM TPH in Soil | Analytical Method ⁻ EPA 9071B Preparation Method ⁻ EPA 9071B | | | | | | | | |
| Total Petroleum Hydrocarbons | ND mg/k | g | 297 | 1 | 04/27/11 00:00 | 04/27/11 00:00 | | | |
| 300.0 IC Anions 28 Days | Analytiçal Method | 1: EPA 300.0 |) | | | | | | |
| Chloride | ND mg/k | g | 118 | 10 | | 04/26/11 02:27 | 16887-00-6 | | |





QUALITY CONTROL DATA

Project

WFS-BGTS SADIE IA, NEBU304

Pace Project No

6097647

QC Batch

MSV/36640

Analysis Method

EPA 8260

QC Batch Method:

EPA 8260

Analysis Description

Associated Lab Samples

6097647001, 6097647002, 6097647003, 6097647004, 6097647005

8260 MSV 5035A Volatile Organics

METHOD BLANK 804488

Matrix Solid

Associated Lab Samples. 6097647001, 6097647002, 6097647003, 6097647004, 6097647005

| | | Blank | Reporting | | |
|---------------------------|-------|--------|-----------|----------------|------------|
| Parameter | Units | Result | Limit | Analyzed | Qualifiers |
| Benzene | ug/kg | ND | 5 0 | 04/26/11 11:42 | |
| Ethylbenzene | ug/kg | ND | 50 | 04/26/11 11 42 | |
| Toluene | ug/kg | ND | 5 0 | 04/26/11 11.42 | |
| Xylene (Total) | ug/kg | ND | 5.0 | 04/26/11 11 42 | |
| 1,2-Dichloroethane-d4 (S) | % | 98 | 77-131 | 04/26/11 11:42 | |
| 4-Bromofluorobenzene (S) | % | 95 | 75-131 | 04/26/11 11 42 | |
| Dibromofluoromethane (S) | % | 106 | 68-129 | 04/26/11 11 42 | |
| Toluene-d8 (S) | % | 93 | 81-121 | 04/26/11 11.42 | |

| LABORATORY CONTROL SAME | PLE 804489 | | | | | |
|--------------------------|------------|-------|--------|-------|--------|------------|
| | | Spike | LCS | LCS | % Rec | - " |
| Parameter | Units | Conc | Result | % Rec | Limits | Qualifiers |
| Benzene | ug/kg | 100 | 106 | 106 | 84-119 | |
| Ethylbenzene | ug/kg | 100 | 114 | 114 | 80-120 | |
| Toluene | ug/kg | 100 | 93 5 | 93 | 83-117 | |
| ylene (Totał) | ug/kg | 300 | 332 | 111 | 80-120 | |
| 2-Dichloroethane-d4 (S) | % | | | 97 | 77-131 | • |
| -Bromofluorobenzene (S) | % | | | 98 | 75-131 | |
| Dibromofluoromethane (S) | % | | | 109 | 68-129 | |
| Toluene-d8 (S) | % | | | 94 | 81-121 | |
| | | | | | | |







QUALITY CONTROL DATA

Project

WFS-BGTS SADIE IA, NEBU304

Pace Project No

6097647

QC Batch:

PMST/6067

T/6067

Analysis Method

ASTM D2974-87

QC Batch Method

ASTM D2974-87

Analysis Description:

Dry Weight/Percent Moisture

Associated Lab Samples.

6097647001, 6097647002, 6097647003, 6097647004, 6097647005

METHOD BLANK 804116

Matrix Solid

Associated Lab Samples

6097647001, 6097647002, 6097647003, 6097647004, 6097647005

Blank

Reporting

Parameter

Units

Units

Result

Limit Analyzed

Qualifiers

Percent Moisture

%

ND

0 50 04/26/11 00 00

SAMPLE DUPLICATE 804117

6097289012 Result

Dup Result

RPD

Max RPD

Qualifiers

Parameter
Percent Moisture

%

22 6

22 9

2


20

Date 04/27/2011 05 11 PM

REPORT OF LABORATORY ANALYSIS

Page 11 of 15



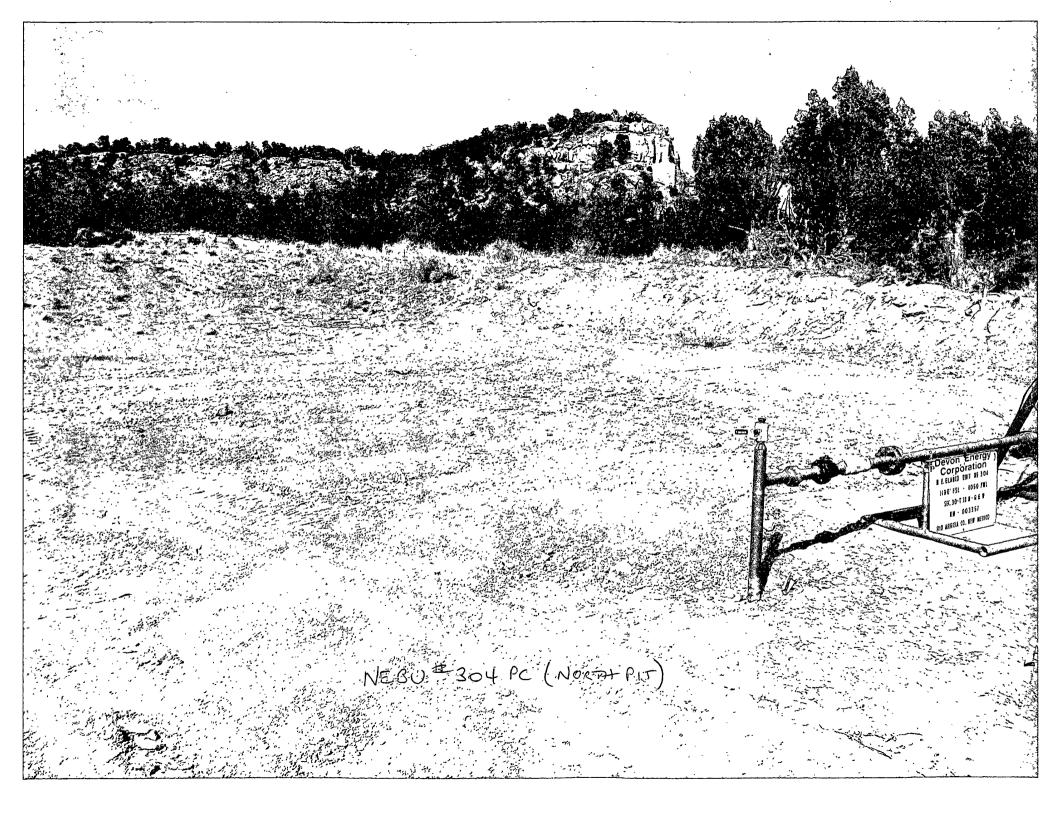

Williams Four Corners, LLC Below Grade Tank Closure Report

Well Name: <u>NEBU 304 PC</u>
API Number: <u>3003924163</u>





The following provides information related to the retirement and closure of the below grade tank (BGT) at the named location. All work was performed in accordance with Rule 19.15-17-13 NMAC and was consistent with the Williams BGT Closure Plan approved by NMOCD.

Requirement Provide notices to NMOCD and landowner prior to closure actions.

Action Notification made to the landowner by mail and to the NMOCD Aztec District Office by either mail (included with C-144) or by email.

Requirement. Eliminate discharge to the BGT and remove free standing liquids from BGT and or containment

Action: Discharge to the BGT was eliminated and liquids when present were removed by a licensed hauler and taken to a NMOCD permitted facility listed in the aforementioned closure plan

Requirement: Remove ancillary equipment including piping, liner material, and fencing.

<u>Action</u> Piping. liner material, and fencing was removed in advance or at the time of BGT retirement work. Scrap steel was recycled or placed in a Williams owned storage area to allow evaluation for final disposition.

Requirement Sample and test soils beneath the BGT to determine if there was hydrocarbon impact

Action Soils were sampled and analyzed for TPH, BTEX, and total chlorides. Results are attached to the C-144 Closure Form and are part of the closure documentation

Requirement Address contamination consistent with the Closure Plan or Remedial Action Plan / Protocol.

Action. Contaminated soil was either hauled to a NMOCD approved land farm (identified in the approved BGT Closure Plan) or it was land farmed and or mixed with clean soil to meet acceptable action levels for contaminants of concern (COC)

Requirement Backfill containment / excavation with acceptably clean materials and return area to grade such that ponding and erosion are mitigated.

Action Clean soil (as defined) was used to return the BGT area to grade and was contoured / leveled consistent with the Pit Rule criteria.

Requirement Reclaim and re-seed the area consistent with the Pit Rule and Closure Plan criteria.

Action This requirement was not completed as the BGT was located on an active well pad. As stated in the approved plan, this requirement is deferred pending further well production and / or subsequent actions of the leaseholder and will be addressed when the well site is reclaimed.

Any additional work performed and not described herein was completed consistent with the BGT Closure Plan and for applicable NMOCD requirements. Further information is provided in the C-144 Closure Form as specified in the Pit Rule.



April 18, 2011

Mr. Brandon Powell 1000 Rio Brazos Road Aztec, NM 87410

RE: NOTICE OF BELOW GRADE TANK CLOSURE - NEBU #304

Dear Mr Powell:

Williams hereby provides notice of the intent to retire and close two below grade tanks (BGT) at the NEBU #304 well site. The site is located in Unit M, Section 30, Township 31N, Range 6W and further identified with API #3003924163. The below grade tanks have been used to capture liquids from dehydrator discharge(s).

The tanks are now out of service and will be closed consistent with the Williams Closure Plan for Below Grade Tanks approved by the OCD. Work is scheduled to commence April 20, weather permitting

If you have any questions regarding the nature and extent of work, please call Aaron Dailey at (505) 634-4708 or you may reach me at 505-402-1958

Respectfully,

Mark Harvey

Project Coordinator

Cc. Aaron Dailey - WFS FCA