District 1

1625 N French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV 1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

> Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

Form C-144

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

•	* -
Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	X Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the

	Resources Oil & Gas Com	npany, LP		OGRID#: <u>14538</u>	}	
ddress: P.O. Box 4	289, Farmington, NM 874	199				
acility or well name:	SAN JUAN 28-6 UNIT 13	33N				
API Number:	30-039-30657		OCD Permit Number			
J/L or Qtr/Qtr: D(N	W/NW) Section: 3	Township: 27N	Range:6	W County:	Rio Arriba	
Center of Proposed De	esign: Latitude: 36	5.608958 °N	Longitude:	107.459471	°W NAD: □] 1927 X 1983
Surface Owner:	Federal State	Private Tr	ibal Trust or Indian	Allotment		
X Pit: Subsection F	or G of 19 15 17 11 NMAC					
	rilling Workover					
Permanent E	mergency Cavitation	P&A				
X Lined U	Inlined Liner type T	Thickness 12 mil	X LLDPE I	HDPE PVC	Other	
X String-Reinforced					1	
Liner Seams X	Welded X Factory (Other	Volume 4400	bbl Dimensions	L <u>65'</u> x W <u>4</u>	5' x D 10'
Closed-loop Sy	stem: Subsection H of 19 15	5 17 11 NMAC		•		
		Worksvar or	5 11 // 1			
Type of Operation	P&A Drilling a ne	workover of	Drilling (Applies to	activities which requ	iire prior approval	of a permit or
Type of Operation	P&A Drilling a ne	notice of inte	, 0 \	activities which requ		•
Drying Pad	Above Ground Steel Tanks	notice of inte	ent)	,		•
Drying Pad Lined U	Above Ground Steel Tanks	notice of inte	ent)	,		•
Drying Pad Lined U	Above Ground Steel Tanks	notice of inte	ent)	,	Other Other	N=123450 AECEIVED
Drying Pad Lined U	Above Ground Steel Tanks	notice of inte	ent)	,	Other Other	N=123450 AECEIVED
Drying Pad Lined Ut	Above Ground Steel Tanks	notice of into	ent)	,	Other Other	N=123450 AECEIVED
Drying Pad Lined Utilizer Seams W	Above Ground Steel Tanks nlined Liner type The Velded Factory Ot Lk: Subsection I of 19 15 17 1	notice of into	ent)	,	Other Other	N=123450 AECEIVED
Drying Pad Lined Un Liner Seams W Below-grade tan Volume Tank Construction ma	Above Ground Steel Tanks nlined Liner type Th Velded Factory Ot Lk: Subsection I of 19 15 17 1	notice of into	ent)	,	Other Other	N=123450 AECEIVED
Drying Pad Lined Un Liner Seams W 4 Below-grade tan Volume Tank Construction ma	Above Ground Steel Tanks nlined Liner type The Velded Factory Ot ok: Subsection I of 19 15 17 1	notice of into	ent) Other LLDPE H	DPE PVD.	Other Other	N=123450 AECEIVED
Drying Pad Lined Un Liner Seams W 4 Below-grade tan Volume Tank Construction ma	Above Ground Steel Tanks nlined Liner type The Velded Factory Ot ak: Subsection I of 19 15 17 1 bbl Type nterial ment with leak detection	notice of into	ent) Other LLDPE H cr, 6-inch lift and auto	DPE PVD.	Other Other	N=123450 AECEIVEI
Drying Pad Lined Under Seams W 4 Below-grade tan Volume Tank Construction ma Secondary contains Visible sidewalls	Above Ground Steel Tanks nlined Liner type The Velded Factory Ot ak: Subsection I of 19 15 17 1 bbl Type nterial ment with leak detection	notice of into	ent) Other LLDPE H cr, 6-inch lift and auto	DPE PVD.	Other Other	RECEIVED
Drying Pad Lined Under Seams W 4 Below-grade tan Volume Tank Construction ma Secondary contains Visible sidewalls	Above Ground Steel Tanks nlined Liner type The Velded Factory Ot ok: Subsection I of 19 15 17 1 bbl Type sterial ment with leak detection s and liner Visible	notice of into	ent) Other LLDPE H cr, 6-inch lift and auto	DPE PVD.	Other Other	N=123450 AECEIVED
Drying Pad Lined Utilized Williams Seams Williams Williams Wolume Tank Construction ma Secondary contains Visible sidewalls Liner Type Thic	Above Ground Steel Tanks nlined Liner type The Velded Factory Ot Ot Lk: Subsection I of 19 15 17 I	notice of into	ent) Other LLDPE H cr, 6-inch lift and auto	DPE PVD.	Other Other	N=123450 AECEIVED

Fencing: Subsection D of 19 15 17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate Please specify				
Netting: Subsection E of 19.15 17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)				
Signs: Subsection C of 19 15 17 11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19 15 3 103 NMAC				
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19 15.17 NMAC for guidance Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consi (Fencing/BGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval	deration of app	roval		
Siting Criteria (regarding permitting) 19 15 17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.				
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells	Yes	No		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site	Yes	∏No		
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No		
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo; Satellite image	□NA			
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits)	Yes NA	No		
 Visual inspection (certification) of the proposed site, Aerial photo, Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. 	Yes	No		
- NM Office of the State Engineer - IWATERS database search, Visual inspection (certification) of the proposed site. Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval obtained from the municipality	Yes	No		
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	☐ Yes ☐ Yes	□No		
Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	Yes	No		
Within a 100-year floodplain - FEMA map	Yes	No		

Form C-144 Oil Conservation Division Page 2 of 5

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC			
Instructions. Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.			
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC			
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9			
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC			
Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC			
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC			
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC			
Previously Approved Design (attach copy of design) API or Permit Number			
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15 17 9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC			
Previously Approved Design (attach copy of design) API			
Previously Approved Operating and Maintenance Plan API			
Permanent Pits Permit Application Checklist: Subsection B of 19 15 17 9 NMAC Instructions. Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19 15 17 9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC Crimatological Factors Assessmeni Certified Engineering Design Plans - based upon the appropriate requirements of 19 15 17 11 NMAC Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19 15 17 11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15 17 11 NMAC Quality Control/Quality Assurance Construction and Installation Plar Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15.17 11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15 17 9 NMAC and 19 15 17 13 NMAC			
Proposed Closure: 19 15 17 13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type			
15			
Waste Excavation and Removal Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan.			
Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC			
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17 13 NMAC			
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings			
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC			
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC			
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17.13 NMAC			

Torm C-144 Oil Conservation Division Page 3 of 5

16 Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Stee	el Tanks or Haul-off Bins Only:(19 15 17 13 D NMAC)			
Instructions Please identify the facility or facilities for the disposal of liquids, drilling are required		ilities		
Disposal Facility Name	Disposal Facility Permit #			
Disposal Facility Name	Disposal Facility Permit #			
Will any of the proposed closed-loop system operations and associated activities Yes (If yes, please provide the information No		ice and operations?		
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specification - based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements.	tion I of 19 15 17 13 NMAC			
17 Siting Criteria (Regarding on-site closure methods only: 19 15 17 10 NMAC Instructions Each sting criteria requires a demonstration of compliance in the closure plan Resting criteria may require administrative approval from the appropriate district office or may be consideration of approval Justifications and/or demonstrations of equivalency are required. Plant	commendations of acceptable source material are provided below considered an exception which must be submitted to the Santa Fe Er			
Ground water is less than 50 feet below the bottom of the buried waste		Yes No		
- NM Office of the State Engineer - IWATERS database search, USGS Data obta	ained from nearby wells	∐N/A		
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes No		
- NM Office of the State Engineer - (WATERS database search, USGS, Data obta	ned from nearby wells	□N/A		
Ground water is more than 100 feet below the bottom of the buried waste	•	Yes No		
- NM Office of the State Engineer - iWATERS database search, USGS, Data obta	ined from nearby wells	□N/A		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other signific (measured from the ordinary high-water mark)	cant watercourse or lakebed, sinkhole, or playa lake	Yes No		
- Topographic map, Visual inspection (certification) of the proposed site				
Within 300 feet from a permanent residence, school, hospital, institution, or church in		Yes No		
- Visual inspection (certification) of the proposed site, Aerial photo, satellite image	2	□Yes □No		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less the purposes, or within 1000 horizontal fee of any other fresh water well or spring, in exist - NM Office of the State Engineer - iWATERS database, Visual inspection (certifi	tence at the time of the initial application			
Within incorporated municipal boundaries or within a defined municipal fresh water w pursuant to NMSA 1978, Section 3-27-3, as amended	rell field covered under a municipal ordinance adopted	Yes No		
- Written confirmation or verification from the municipality, Written approval obt	ained from the municipality	Dv., Dv.		
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map, Visual insp	pection (certification) of the proposed site	∐Yes ∐No		
Within the area overlying a subsurface mine	,	Yes No		
- Written confiramtion or verification or map from the NM EMNRD-Mining and N	Mineral Division			
Within an unstable area		Yes No		
- Engineering measures incorporated into the design, NM Bureau of Geology & M Topographic map	imeral Resources, USGS, NM Geological Society,			
Within a 100-year floodplain - FEMA map		Yes No		
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each check mark in the box, that the documents are attached.	of the following items must bee attached to the closure	plan. Please indicate, by a		
Siting Criteria Compliance Demonstrations - based upon the appropriate	e requirements of 19 15 17 10 NMAC			
Proof of Surface Owner Notice - based upon the appropriate requiremer	nts of Subsection F of 19 15 17 13 NMAC	ţ		
Construction/Design Plan of Burial Trench (if applicable) based upon the				
Construction/Design Plan of Temporary Pit (for in place burial of a dryi		15 17 11 NMAC		
Protoçols and Procedures - based upon the appropriate requirements of				
Confirmation Sampling Plan (if applicable) - based upon the appropriate Waste Material Sampling Plan - based upon the appropriate requiremen	•			
Waste Material Sampling Plan - based upon the appropriate requiremen Disposal Facility Name and Permit Number (for liquids, drilling fluids a		not be achieved)		
Soil Cover Design - based upon the appropriate requirements of Subsec		\		
Re-vegetation Plan - based upon the appropriate requirements of Subsection				
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC				

Form C-144 Oil Conservation Division Page 4 of 5

19 Onewstern Amelicantic Co. (15. 4)
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print) Title
Signature Date
e-mail address Telephone
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC Instructions Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. X Closure Completion Date: August 17, 2009
22
Closure Method: Waste Excavation and Removal On-site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized. Disposal Facility Name Disposal Facility Permit Number Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliane to the items below) Required for impacted areas which will not be used for future service and operations. Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installatior Re-vegetation Application Rates and Seeding Technique 24 Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached. X Proof of Closure Notice (surface owner and division)
X Proof of Closure Notice (surface owner and division) X Proof of Deed Notice (required for on-site closure) X Plot Plan (for on-site closures and temporary pits) X Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (if applicable) Disposal Facility Name and Permit Number X Soil Backfilling and Cover Installatior X Re-vegetation Application Rates and Seeding Technique X Site Reclamation (Photo Documentation) On-site Closure Location Latitude 36.608839 °N Longitude 107.459729 °W NAD 1927 X 1983
25
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print) Crystal Tafoya Title Regulatory Tech
Signature Date 2/1/2010

Burlington Resources Oil Gas Company, LP San Juan Basin Closure Report

Lease Name: SAN JUAN 28-6 UNIT 133N

API No.: 30-039-30657

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial.

3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached)(Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per . Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	6.9 ug/kg
BTEX	EPA SW-846 8021B or 8260B	50	117 ug/KG
TPH	EPA SW-846 418.1	2500	121 mg/kg
GRO/DRO	EPA SW-846 8015M	500	52.4 mg/Kg
Chlorides	EPA 300.1	1000/ 500 -	190 mg/L

9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: Burlington, BLM, San Juan 28-6 Unit 133N, UL-D, Sec. 3, Twn 27N, Rge 6W, API # 30-039-30657

Sessions, Tamra D

From: Sessions, Tamra D

Sent: Friday, January 09, 2009 3:38 PM

To: 'mark_kelly@nm.blm.gov'

Cc: Sessions, Tamra D

Subject: Surface Owner Notification

The following locations will have the temporary pit closed on-site. Please let me know if you have any questions.

San Juan 28-5 Unit 59N San Juan 28-6 Unit 206P San Juan 28-6 Unit 133N

Thank you.

Tamra Sessions

Staff Regulatory Technician CONOCOPHILLIPS SJBU 505-326-9834 Fax 599-4062 Tamra.D.Sessions@conocophillips.com District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

¹ API Number

E/2 321.08 MV

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505


Form C-102 Revised October 12, 2005 Submit to Appropriate District Office State Lease - 7 Copies Fee Lease - 3 Copies

AMMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

						B/	ASIN DAKOTA / I	BLANCO MESAVE	ERDE
⁴ Property Co	de				5 Proper SAN JUAN	ty Name N 28-6 UNIT			⁶ Well Number 133N
OGRID N	7 OGRID No. 8 Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY LP					⁹ Elevation 6700			
	•				10 SURFACE	LOCATION			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
а	3	27-N	6-W		500	NORTH	990	WEST	RIO ARRIBA
			11 B	ottom H	ole Location	If Different Fro	om Surface		
UL or lot no.	Section	Township	Range	Lot ldn	Feet from the	North/South line	Feet from the	East/West line	County
Α	4	27-N	6-W		600	NORTH	330	EAST	RIO ARRIBA
Dedicated Acre)K	or Infill	Consolidation	Code 15	Order No.				

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

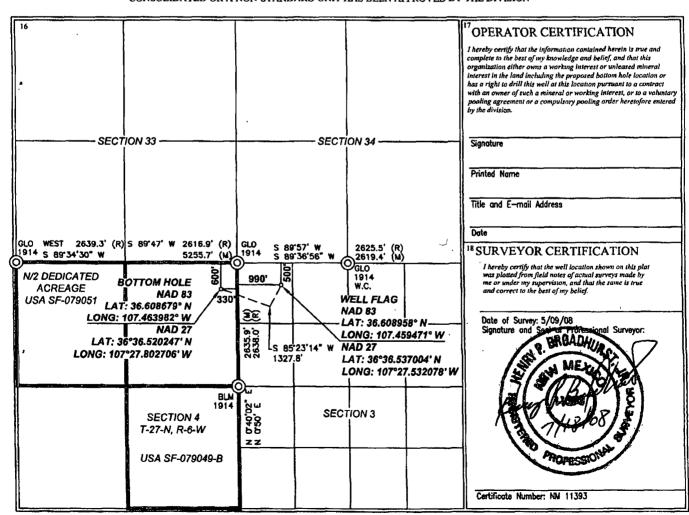



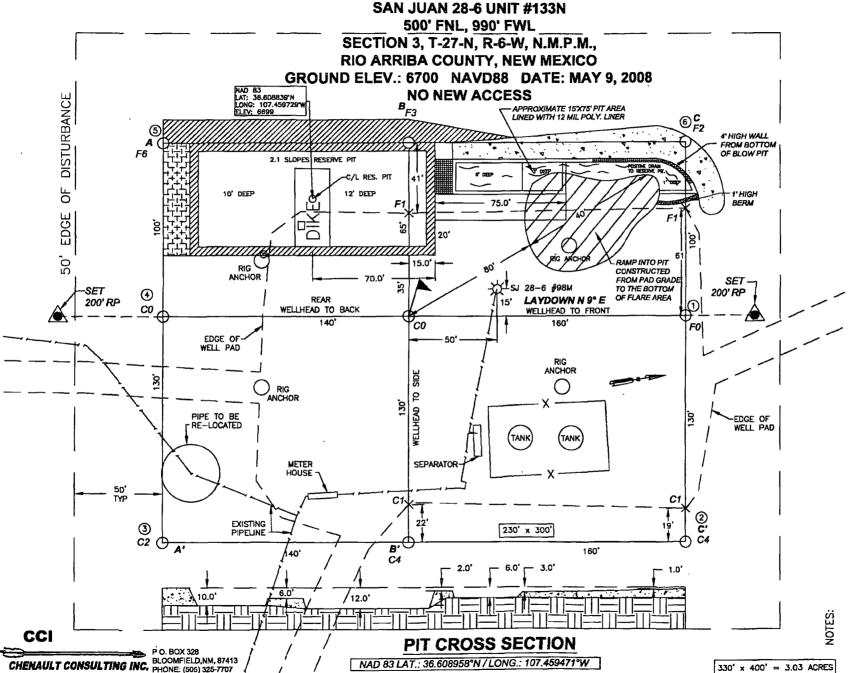

CONSTRUCTION. ဥ PRIOR UNMARKED BURIED (2) WORKING DAYS OR PIPELINES.
Y MARKED OR I UTILITIES OR ON OF ANY M SS ROAD AT (rs is no Should Cables (C.C.I. SURVEYS
CONTRACTOR S
PIPLINES OR C ď

SIDE).

SHALLOW

ABOVE

AND WIDE

(OVERFLOW

SIDE

DEEP

ABOVE

BE

OIKE:

님

RESERVE

330' x 400' = 3.03 ACRES



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client.	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 28-6 #133N	Date Reported:	06-22-09
Laboratory Number:	50562	Date Sampled:	06-03-09
Chain of Custody No	7114	Date Received ⁻	06-18-09
Sample Matrix:	Soil	Date Extracted ⁻	06-18-09
Preservative.	Cool	Date Analyzed	06-19-09
Condition ⁻	Out of Holding Time	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	9.3	0.2
Diesel Range (C10 - C28)	43.1	0.1
Total Petroleum Hydrocarbons	52.4	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996

Comments:

Drilling Pit Sample.

Analyst

Mustum Watter
Review



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client.	ConocoPhillips	Project #	96052-0026
Sample ID:	SJ 28-6 #133N Background	Date Reported.	06-22-09
Laboratory Number ⁻	50563	Date Sampled:	06-03-09
Chain of Custody No:	7114	Date Received:	06-18-09
Sample Matrix:	Soil	Date Extracted	06-18-09
Preservative:	Cool	Date Analyzed:	06-19-09
Condition	Out of Holding Time	Analysis Requested.	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996

Comments:

Drilling Pit Sample.

Analyst

Review

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc.com envirotech-inc.com



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client:	QA/QC	Project #	N/A
Sample ID:	06-19-09 QA/QC	Date Reported	06-22-09
Laboratory Number [.]	50562	Date Sampled.	N/A
Sample Matrix [.]	Methylene Chloride	Date Received:	N/A
Preservative.	N/A	Date Analyzed [.]	06-19-09
Condition:	N/A	Analysis Requested:	TPH

Service Control of the Control of th	I-Cal Date	I-Cal RF:	C-Cal RF:	% Difference	Accept Range
Gasoline Range C5 - C10	05-07-07	1.0797E+003	1.0801E+003	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	1.0336E+003	1.0340E+003	0.04%	0 - 15%

Blank Conc. (mg/L - mg/Kg)	Concentration	Detection Limit
Gasoline Range C5 - C10	ND	0.2
Diesel Range C10 - C28	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept. Range
Gasoline Range C5 - C10	9.3	10.4	11.8%	0 - 30%
Diesel Range C10 - C28	43.1	45.2	4.9%	0 - 30%

Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept Range
Gasoline Range C5 - C10	9.3	250	255	98.5%	75 - 125%
Diesel Range C10 - C28	43.1	250	307	105%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 50562 - 50571.

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 28-6 #133N	Date Reported [.]	06-22-09
Laboratory Number:	50562	Date Sampled	06-03-09
Chain of Custody:	7114	Date Received:	06-18-09
Sample Matrix:	Soil	Date Analyzed:	06-19-09
Preservative:	Cool	Date Extracted:	06-18-09
Condition:	Out of Holding Time	Analysis Requested.	BTEX

		Det.	
	Concentration	Limit	
Parameter	(ug/Kg)	(ug/Kg)	
Benzene	6.9	0.9	
Toluene	17.3	1.0	
Ethylbenzene	15.0	1.0	
p,m-Xylene	46.2	1.2	
o-Xylene	31.1	0.9	
Total BTEX	117		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	96.0 %
	1,4-difluorobenzene	96.0 %
	Bromochlorobenzene	96.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Mistern Weekles Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client [.]	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 28-6 #133N Background	Date Reported:	06-22-09
Laboratory Number:	50563	Date Sampled:	06-03-09
Chain of Custody:	7114	Date Received.	06-18-09
Sample Matrix:	Soil	Date Analyzed:	06-19-09
Preservative:	Cool	Date Extracted:	06-18-09
Condition:	Out of Holding Time	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	2.5	0.9	
Toluene	1.5	1.0	
Ethylbenzene	3.7	1.0	
p,m-Xylene	10.0	1.2	
o-Xylene	5.9	0.9	
Total BTEX	23.6		

ND - Parameter not detected at the stated detection limit

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client	N/A	Project #	N/A
Sample ID	06-19-BT QA/QC	Date Reported.	06-22-09
Laboratory Number	50562	Date Sampled.	N/A
Sample Matrix	Soil	Date Received	N/A
Preservative	N/A	Date Analyzed	06-19-09
Condition	N/A	Analysis	BTEX

Calibration and Detection Limits (ug/L)	I-Cal RF:	C-Cal RF: Accept: Rang	%Diff. je 0 - 15%	Blank Gone	Detect: Limit
Benzene	1 7938E+006	1 7974E+006	0.2%	ND	0.1
Toluene	1 1429E+006	1 1452E+006	0.2%	ND	0.1
Ethylbenzene	8 6761E+005	8 6934E+005	0.2%	ND	0.1
p,m-Xylene	1 9574E+006	1 9614E+006	0.2%	ND	0.1
o-Xylene	7 8259E+005	7 8416E+005	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample Di	uplicate	%Diff.	Accept Range	Detect. Limit	(
Benzene	6.9	6.7	2.9%	0 - 30%	0.9	
Toluene	17.3	16.1	6.9%	0 - 30%	1.0	
Ethylbenzene	15.0	15.3	2.0%	0 - 30%	1.0	
p,m-Xylene	46.2	49.2	6.5%	0 - 30%	1.2	
o-Xylene	31.1	29.9	3.9%	0 - 30%	0.9	

Spike Conc. (ug/Kg)	Sample Amo	unt Spiked Spik	ed Sample	% Recovery	Accept Range
Benzene	6.9	50.0	56.7	99.6%	39 - 150
Toluene	17.3	50.0	68.7	102%	46 - 148
Ethylbenzene	15.0	50.0	62.9	96.8%	32 - 160
p,m-Xylene	46.2	100	144	98.4%	46 - 148
o-Xylene	31.1	50.0	82.2	101%	46 - 148

ND - Parameter not detected at the stated detection limit

References

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using

Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996

Comments:

QA/QC for Samples 50562 - 50571.

Analyst

EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 28-6 #133N	Date Reported:	06-23-09
Laboratory Number:	50562	Date Sampled:	06-03-09
Chain of Custody No:	7114	Date Received:	06-18-09
Sample Matrix:	Soil	Date Extracted:	06-22-09
Preservative:	Cool	Date Analyzed:	06-22-09
Condition:	Out of Holding Time	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

121

18.9

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

Analyst

Review

EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	SJ 28-6 #133N Background	Date Reported:	06-23-09
Laboratory Number:	50563	Date Sampled:	06-03-09
Chain of Custody No:	7114	Date Received:	06-18-09
Sample Matrix:	Soil	Date Extracted:	06-22-09
Preservative:	Cool	Date Analyzed:	06-22-09
Condition:	Out of Holding Time	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

21.0

18.9

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

'hristung Walters Review



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

Client:

QA/QC

Project #:

N/A

Sample ID:

QA/QC

Date Reported:

06-23-09

Laboratory Number:

06-22-TPH.QA/QC 50562

Date Sampled:

N/A

TPH

Sample Matrix:

Freon-113

Date Analyzed:

06-22-09

Preservative: Condition:

N/A N/A

Date Extracted: Analysis Needed: 06-22-09

Calibration

I-Cal Date

C-Cal Date

I-Cal RF:

C-Cal RF: % Difference

Accept. Range

06-16-09

06-22-09

1,310

1,270

3.1%

+/- 10%

Blank Conc. (mg/Kg)

TPH

Concentration

Detection Limit

ND

18.9

Duplicate Conc. (mg/Kg)

TPH

Sample 121

Duplicate % Difference Accept. Range 121

0.0%

+/- 30%

Spike Conc. (mg/Kg)

Sample

Spike Added Spike Result > % Recovery Accept Range

TPH

121

2,000

2,020

95.3%

80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

QA/QC for Samples 50558, 50559, 50562, 50563, 50570, 50571, 50604 and 50608



Chloride

Client: ConocoPhillips Project #: 96052-0026 Sample ID. SJ 28-6 #133N Date Reported: 06-22-09 Lab ID#: 50562 Date Sampled: 06-03-09 Sample Matrix Soil Date Received. 06-18-09 Preservative: Cool Date Analyzed: 06-19-09 Condition: Out of Holding Time Chain of Custody: 7114

Parameter

Concentration (mg/Kg)

Total Chloride

190

Reference:

U.S.E P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992

Comments:

Drilling Pit Sample.

Analyst

Review



Chloride

Client ConocoPhillips Project #: 96052-0026 SJ 28-6 #133N Background Sample ID: Date Reported: 06-22-09 Lab ID#: 50563 Date Sampled: 06-03-09 Soil 06-18-09 Sample Matrix: Date Received: Preservative: Cool Date Analyzed: 06-19-09 Condition: Out of Holding Time Chain of Custody: 7114

Parameter

Concentration (mg/Kg)

Total Chloride

55

Reference:

U.S.E P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Drilling Pit Sample.

Analyst

Review

Two Copies	iate District C	ITTICE		_		State of No										orm C-105
District I 1625 N French Dr	, Hobbs, NM	88240		Ene	ergy, I	Minerals an	d Na	tural Re	esources		1. WELL	ΔΡΙ	NO			July 17, 2008
District II 1301 W Grand Ave	enue, Artesia,	NM 88210		Oil Conservation Division						30-039-30						
District III 1000 Rio Brazos Ro	Aztec NM	87410		Oil Conservation Division 1220 South St. Francis Dr.						2 Type of L						
District IV 1220 S St Francis				1220 South St. Francis Dr. Santa Fe, NM 87505						3 State Oil		☐ FEI		ED/IND	IAN	
J											SF-079051		Zouse 14			
		ETION (OR R	ECO	MPL	ETION RE	POF	RT AND	LOG				own all Disky			
4 Reason for file	ng										5 Lease Nan San Juan 28-6			ement N	ame	
☐ COMPLETI	ON REPO	RT (Fill in b	oxes #	1 throu	gh #31	for State and Fe	e wells	only)			6 Well Num					
C-144 CLOS #33, attach this ar	nd the plat to	ACHMENT the C-144	(Fill i	ın boxe report	s #1 thr	ough #9, #15 D	ate Rig 15 17.1	Released 3 K NMA	and #32 an C)	ıd/or	133N					
7 Type of Comp ✓ NEW V	letion. VELL \textsq	WORKOVE	R □ 1	DEEPE	ENING	□PLUGBAC	к П	DIFFERE	NT RESER	VOII	R 🗆 OTHER					
8 Name of Opera	itor		-								9 OGRID					·
Burlington Resou 10. Address of Op	perator	is Company	, LP				,				14538 11 Pool name	e or W	ildcat			
12.Location	Unit Ltr	Section		Towns	hip	Range	Lot		Feet from	the	N/S Line	Fee	t from the	e E/W	Line	County
Surface:							1									
ВН:				,												
13 Date Spudded		TD Reach	ied		Date Rig 9/2009	Released		16	Date Com	pleteo	d (Ready to Pro	duce)		7. Eleva RT, GR,		and RKB,
18 Total Measure	ed Depth.of	Well		19 P	lug Bac	k Measured De	pth	20	Was Direc	ctiona	al Survey Made	?	21 Ty	pe Electr	ric and O	ther Logs Run
22 Producing Int	erval(s), of t	this complet	ion - To	op, Bot	tom, Na	ime		· · · · · · · · · · · · · · · · · · ·					•			
23					CAS	ING REC	ORI	D (Rep	ort all s	trin	gs set in w	ell)				
CASING SIZ	ZE	WEIGHT	LB /F	r		DEPTH SET		HO	DLE SIZE		CEMENTIN	NG RE	CORD	Al	MOUNT	PULLED
							1									
						3										
					Y 13 11	cn necone				1		DI ID I	NO DE	ZOD D		
SIZE	TOP		BOT	ГОМ	LINI	ER RECORD SACKS CEM		SCREE	V	25 SI	ZE		NG REO EPTH SE		PACK	ER SET
		-														
26 P 6	16.1			1)					<u> </u>		. commence		· · · · · · · · · · · · · · · · · · ·			
26 Perforation	record (inte	erval, size, a	nd num	ber)					ID, SHOT INTERVA		ACTURE, CI					
								52,							0 0000	
							DD	DATE	TYON							
Date First Produc	tion	Pr	roductio	on Meth	nod (Fle	owing, gas lift, p		ODUC		m)	Well Statu	c (Pro	d or Shi	ıt_121)		
					104 (116	, , , , , , , , , , , , , , , , , , ,				P)	Well State	3 (1 7 0	u or bria		_	
Date of Test	Hours T	ested .	Chok	ce Size		Prod'n For Test Period		Oil - Bb	1	Ga	ıs - MCF	"	/ater - Bb	ıl	Gas - (Oil Ratio
Flow Tubing Press	Casing I	Pressure		ulated 2	24-	Oıl - Bbl		Gas	- MCF		Water - Bbl		Oil Gi	avity - A	PI - (Cor	r)
29 Disposition o	f Gas <i>(Sold,</i>	used for fue										T 30	Test Witi	nessed By	v .	
31 List Attachme									 							
32 If a temporary	pit was use	ed at the wel	l. attacl	h a plat	with th	e location of the	e tempo	orary pit.								
33. If an on-site b	•		•	•			•									
I hereby certij	fy that the	Latitude informat	36 608 Ion sh	8839°N	Loi on hoth	ngitude 107 45 h sides of thi	9729°\ s forn	V NAD [_1927 ⊠ and com	1983 plete	to the hest	of m	knowl	edge an	nd helie	f
Signature		Talo	-ya	,	Prir				•				2/1/	,	·	
	ss crystal	Ltafova@	/ conoc	onhill					-				- /	<i>v</i>		
	E-mail Address crystal.tafoya@conocophillips.com															

(

O ConocoPhillips

Pit Closure Form:	
Date: 8117169	
Well Name: <u>\$.5.28-6* 133N.</u>	
Footages:	Unit Letter:
Section: 3 , T-21-N, R-6-W, County	y: Ria Binh State: NIM-
Contractor Closing Plt: Azte	
Construction Inspector: $\Sigma_{ric} \subseteq S_{mit}$	Date: 8 19/09

Tafoya, Crystal

From:

Silverman, Jason M

Sent:

Thursday, August 13, 2009 11:19 AM

To:

Brandon.Powell@state.nm.us; Mark Kelly; Robert Switzer; Sherrie Landon

Cc:

'Aztec Excavation'; 'Randy Flaherty', 'BOS'; Faver Norman (faverconsulting@yahoo.com);

Jared Chavez; Bassing, Kendal R.; Scott Smith, Silverman, Jason M; Smith Eric

(sconsulting.eric@gmail.com); Terry Lowe; Becker, Joey W; Bonilla, Amanda; Bowker, Terry D; Busse, Dollie L; Chavez, Virgil E; Gordon Chenault, GRP:SJBU Production Leads; Hockett, Christy R; Johnson, Kirk L; Kennedy, Jim R; Lopez, Richard A; Nelson, Terry J; O'Nan, Mike J.; Peace, James T; Pierce, Richard M; Poulson, Mark E; Richards, Brian; Smith, Randall O; Stamets, Steve A; Thacker, LARRY; Work, Jim A; Blair, Maxwell O; Blakley, Mac; Clark, Joni E; Farrell, Juanita R; Gillette, Steven L (Gray Surface Specialties and Consulting, Ltd.); Greer, David A; Hines, Derek J (Finney Land Co.); Maxwell, Mary Alice; McWilliams, Peggy L;

Seabolt, Elmo F; Stallsmith, Mark R

Subject:

Reclamation Notice: San Juan 28-6 Unit 133N

Importance: High

Attachments: San Juan 28-6 unit 133N.pdf

Aztec Excavation will move a tractor to the San Juan 28-6 Unit 133N on Monday, August **17th. 2009.** to start the Reclamation process.

Please contact Eric Smith (608-1387) if you have any questions or need further assistance.

Thanks, Jason Silverman

Burlington Resources Well- Network #: 10238225

Rio Arriba County, NM

San Juan 28-6 Unit 133N – BLM surface / BLM minerals

Onsited: Mike Flaniken 8-07-08

Twin: n/a

500' FNL, 990' FWL SEC. 3, T27N, R06W

Unit Letter 'D'

Lease #: USA-SF-079051 API #: 30-039-30657

Latitude: 36° 36 min 32.24880 sec N (NAD 83) Longitude: 107° 27 min 34.09560 sec W (NAD83)

Elevation: 6700'

Jason Silverman -----Construction Technician ConocoPhillips Company - SJBU Projects Team
P.O. Box 4289
Farmington, NM 87499-4289
505-326-9821
Jason.M.Silverman@ConocoPhillips.com

ConocoPhillips

Reclamation Form:		
Date: <u>9/2//09</u>		
Well Name: <u>28~(#</u>	133N	-
Footages: 500'fni	990 FWL	Unit Letter;
Section: <u>3</u> , T- <u>21</u> .	N, R- <u></u> -W, County: <u>R.</u>	Arcily State: N.M.
Reclamation Contractor:	Aztec	
Reclamation Date:	9/10/09	
Road Completion Date:	9/18/09	
	9/18/09	
·	·	
Construction Inspector:	Eric Smit	Date: 9/2//09
Inspector Signature:	5-21	,

UNIT D SEC 3 T27N ROOW


500' FNL 990' FWL


API # 30-039-30657


LEASE# USA-SF-079051 ELEV.6700'

RIO ARRIBA COUNTY, NEW MEXICO

EMERGENCY CONTACT: 1-505-324-5170 AN JUAN 28-6 UNIT #133N TITUDE 36°36 MIN. 32.24880 SEC. N (NAD 83) NGITUDE 107°27 MIN. 34.09560 SEC. N (NAD 83) . N. (NAD 83)

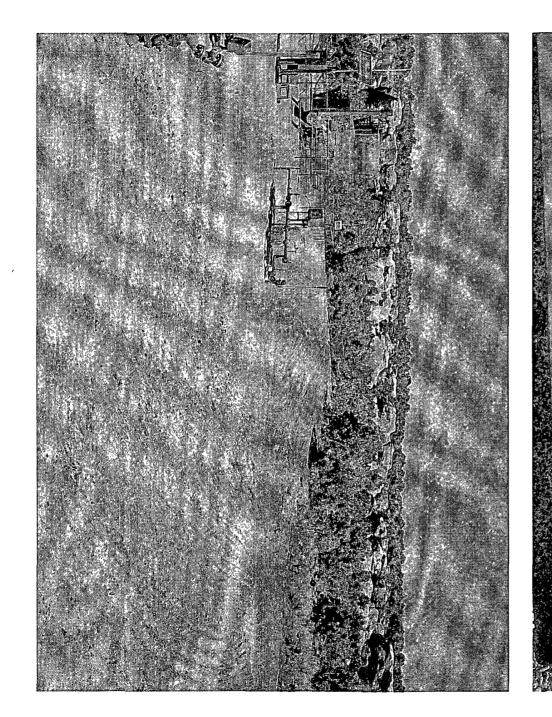

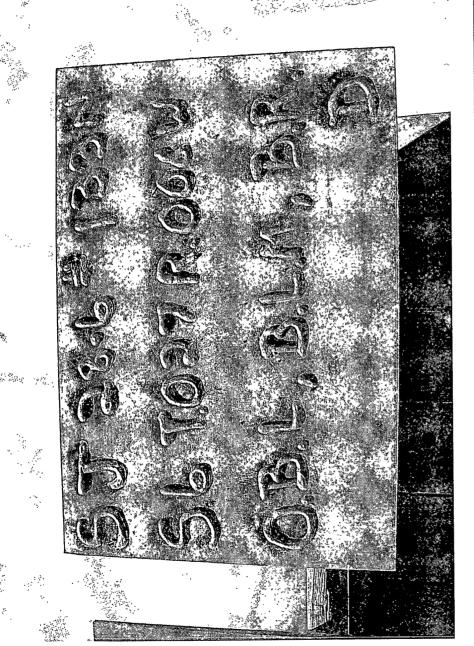

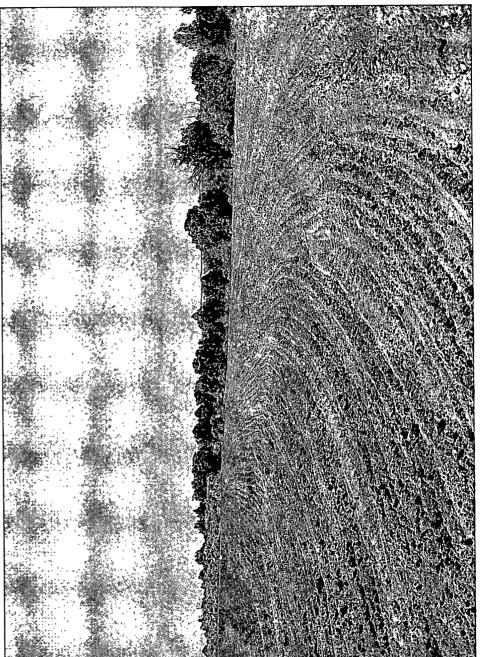

WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

WELL NAME: San Juan 28-6 Unit 133N

API#: 30-039-30657

DATE	INSPECTOR	SAFETY CHECK	LOCATION CHECK	PICTURES TAKEN	COMMENTS
3/16/09	Art Sanchez	Х	Х	Х	AWS #673 drilling rig on location.
3/24/09	Art Sanchez	Х	Х	Х	Pit liner was torn and unkeyed, oil stains on location notified OCD. Called Crossfire to repair liner.
4/14/09	Art Sanchez	X	X	Х	
4/28/09	Art Sanchez	Х	X	Х	
5/19/09	Art Sanchez	Х	Х	Х	
6/2/09	Art Sanchez	Χ	Х	Х	
6/11/09	Art Sänchez	X	Х	Х	-
6/11/09	Art Sanchez	Х	Х	Х	
7/30/09	Elmer Perry	X	Х	Х	·
8/10/09	Elmer Perry	Х	Х	Х	
8/17/09	Elmer Perry	Х	Х		Sign on location.
8/17/09	Eric Smith				Pit Closed
	`				
				-	·