District I

1625 N French Dr , Hobbs, NM 88240

District II

1301 W Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV 1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

\sim	
\sim \sim \sim \sim \sim	
$\mathcal{L}(\mathcal{L})$	

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	X Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system
	below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the

environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538
Address: P.O. Box 4289, Farmington, NM 87499
Facility or well name FARMINGTON COM 100S
API Number: 30-045-34579 OCD Permit Number
U/L or Qtr/Qtr: E(SW/NW) Section: 36 Township: 31N, Range: 13W County: San Juan
Center of Proposed Design: Latitude: 36.859053 °N Longitude: 108.162008 °W NAD 1927 § 1983
Surface Owner: Federal S State Private Tribal Trust or Indian Allotment
X Pit: Subsection F or G of 19 15 17 11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type Thickness mil LLDPE HDPE PVD Other
Liner Seams Welded Factory Other
Below-grade tank: Subsection I of 19 15 17 11 NMAC Volume bbl Type of fluid OIL CONS. DIV. DIST. 5 Tank Construction material
Below-grade tank: Subsection I of 19 15 17 11 NMAC Subsection I of 19 15 17 11 NMAC Volume
Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

Fencing: Subsection D of 19.15.17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate Please specify Netting: Subsection E of 19 15.17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)					
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19.15.3 103 NMAC					
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s). Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consist (Fencing/BGT Liner). Exception(s). Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	deration of app	proval			
Siting Criteria (regarding permitting). 19 15 17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.					
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - IWATERS database search, USGS; Data obtained from nearby wells	Yes	□No			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map, Visual inspection (certification) of the proposed site	Yes	□No			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No			
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image	□NA				
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No			
(Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo, Satellite image	□NA				
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	No			
- NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site.					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	□No			
- Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site					
Within the area overlying a subsurface mine.					
 Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources; USGS; NM Geological 	Yes	No			
Society, Topographic map Within a 100-year floodplain - FFMA map	Yes	□No			

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15 17.9 NMAC						
Instructions. Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC						
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9 Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC						
Design Plan - based upon the appropriate requirements of 19 15.17 11 NMAC						
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC						
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of						
19 15 17 9 NMAC and 19 15 17 13 NMAC						
Previously Approved Design (attach copy of design) API or Permit Number						
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 15.17 9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17 9						
NMAC and 19 15 17 13 NMAC						
Previously Approved Design (attach copy of design) API Previously Approved Operating and Maintenance Plan API						
Previously Approved Operating and Maintenance Plan API						
13						
Permanent Pits Permit Application Checklist: Subsection B of 19 15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.						
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19 15 17 9 NMAC						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC						
☐ Climatological Factors Assessmen						
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15 17 11 NMAC						
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19 15 17 11 NMAC						
Leak Detection Design - based upon the appropriate requirements of 19 15 17 11 NMAC						
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15 17 11 NMAC						
Quality Control/Quality Assurance Construction and Installation Plar						
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15 17 11 NMAC						
Nuisance or Hazardous Odors, including H2S, Prevention Plan						
Emergency Response Plan						
Oil Field Waste Stream Characterization						
Monitoring and Inspection Plan						
Erosion Control Plan						
Closure Plan - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC						
14						
Proposed Closure: 19 15 17 13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.						
Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System						
Alternative						
Proposed Closure Method Waste Excavation and Removal						
Waste Removal (Closed-loop systems only)						
On-site Closure Method (only for temporary pits and closed-loop systems)						
In-place Burial On-site Trench Burial						
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)						
15						
Waste Excavation and Removal Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan.						
Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC						
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17.13 NMAC						
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings						
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC						
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC						
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC						

Form C-144 Oil Conservation Division Page 3 of 5

Worth Personal Classer For Classed Inc. Statement That Hiller Above County St. 17	Contract I Lagra and Lagrange Contract				
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel T Instructions. Please identify the facility or facilities for the disposal of liquids, drilling flui		alities			
are required	15 1. 5 2.0				
	Disposal Facility Permit #:				
	Disposal Facility Permit #.				
Will any of the proposed closed-loop system operations and associated activities of Yes (If yes, please provide the information No.	cur on or in areas that will not be used for future serv	ice and operations?			
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specification - based upon the appropriate in	requirements of Subsection II of 10 15 17 12 NMAC				
Re-vegetation Plan - based upon the appropriate requirements of Subsection	-				
Site Reclamation Plan - based upon the appropriate requirements of Subsec	tion G of 19.15 17 13 NMAC				
Siting Criteria (Regarding on-site closure methods only: 19 15 17 10 NMAC Instructions. Each sting criteria requires a demonstration of compliance in the closure plan. Reconstiting criteria may require administrative approval from the appropriate district office or may be conconsideration of approval. Justifications and/or demonstrations of equivalency are required. Please	nvidered an exception which must be submitted to the Santa Fe Er	vironmental Bureau office for			
Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS Data obtains	ed from nearby wells	Yes No			
	a nom nomby wons				
Ground water is between 50 and 100 feet below the bottom of the buried waste	d Communication will be	Yes No			
- NM Office of the State Engineer - (WATERS database search, USGS, Data obtaine	1 from nearby wells	∐N/A			
Ground water is more than 100 feet below the bottom of the buried waste		∐Yes ∐No			
- NM Office of the State Engineer - IWATERS database search, USGS, Data obtaine	1 from nearby wells	□N/A _			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significan (measured from the ordinary high-water mark)	Yes No				
- Topographic map; Visual inspection (certification) of the proposed site					
Within 300 feet from a permanent residence, school, hospital, institution, or church in exist - Visual inspection (certification) of the proposed site, Aerial photo; satellite image	∐Yes ∐No				
- visual inspection (certification) of the proposed site, Aerial photo, satellite image		Yes No			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application - NM Office of the State Engineer - IWATERS database, Visual inspection (certification) of the proposed site					
Within incorporated municipal boundaries or within a defined municipal fresh water well pursuant to NMSA 1978, Section 3-27-3, as amended	· ·	Yes No			
 Written confirmation or verification from the municipality, Written approval obtain Within 500 feet of a wetland 	ed from the municipality	∏Yes ∏No			
- US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspect	ion (certification) of the proposed site				
Within the area overlying a subsurface mine		Yes No			
- Written confirantion or verification or map from the NM EMNRD-Mining and Min	eral Division				
Within an unstable area	LD LIGOS NIMO I LO	Yes No			
 Engineering measures incorporated into the design, NM Bureau of Geology & Mine Topographic map 	ral Resources, USGS, NM Geological Society,				
Within a 100-year floodplain - FEMA map		Yes No			
On-Site Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of t	he following items must bee attached to the closure p	plan. Please indicate, by a			
check mark in the box, that the documents are attached.	0.000000000000000000000000000000000000				
Siting Criteria Compliance Demonstrations - based upon the appropriate re					
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC Construction/Decign Plan of Russel Trench (if applicable) based upon the appropriate requirements of 19 15 17 11 NMAC					
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15 17 11 NMAC					
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19 15 17 11 NMAC Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC					
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC					
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19 15.17 13 NMAC					
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)					
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15 17 13 NMAC					
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC					
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17 13 NMAC					

Form C-144 Oil Conservation Division Page 4 of 5

Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief
Name (Print) Title Title
Signature. Date
e-mail address Telephone
2 Main and 1959
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC Instructions. Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. X Closure Completion Date: September 23, 2008
22 Closure Method: Waste Excavation and Removal Type Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain
23
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:
Instructions: Please identify the facility or facilities for where the liquids, drulling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.
Disposal Facility Name Disposal Facility Permit Number
Disposal Facility Name Disposal Facility Permit Number
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?
Yes (If yes, please demonstrate complilane to the items below)
Required for impacted areas which will not be used for future service and operations. Site Reclamation (Photo Documentation)
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
24 .
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report Please indicate, by a check mark in
the box, that the documents are attached.
X Proof of Closure Notice (surface owner and division)
Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits)
X Confirmation Sampling Analytical Results (if applicable)
Waste Material Sampling Analytical Results (if applicable) S Disposal Facility Name and Permit Number
Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
X Site Reclamation (Photo Documentation)
On-site Closure Location Latitude 36.85923333 °N Longitude 108.1617111 °W NAD 1927 X 1983
25
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print) Crystal Tafoya Title. Regulatory Tech
Signature Date Date
a mail address crystal tafova@conocophttns.com Telenhone 505-326-9837

Burlington Resources Oil Gas Company, LP San Juan Basin Closure Report

Lease Name: FARMINGTON COM 100S

API No.: 30-045-34579

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial.

3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via permit submittal. (See Attached)(Well located on State Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	8.6 ug/kg
BTEX	EPA SW-846 8021B or 8260B	50	63.1 ug/kG
TPH	EPA SW-846 418.1	2500	17.5 mg/kg
GRO/DRO	EPA SW-846 8015M	500	2.4 mg/Kg
Chlorides	EPA 300.1	1000/ 500	210 mg/L

9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished on 10/3/08 with the following seeding regiment:

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished on 10/3/08 with the above seeding regiment. Seeing was accomplished via drilling on the contour whenever practical or by other division-approved methods. The OCD will be notified once two successive growing seasons have been accomplished by submitting a C-103.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: BR, State, FARMINGTON COM 100S, UL-E, Sec. 36, T 31N, R 13W, API # 30-045-34579

DESTRUCT I

State of New Mexico rgy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT III 1000 Bio Brazos Ed., Aztec, N.H. 87410

FC 320.0 ACRE W 1/2

DISTRICT IV 1220 S. Sl. Francis Dr., Santa Fe, NM 67505

☐ AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

API	humber			Pool Code			BASIN FRUITLA		
⁴ Property Co	ode	. ,	· .	· .	*Property FARMINGTON				Well Number 100S
70GRD No			BURL	INGTON RI	Operator		PANY LP		* Elevation 6020
		<u>.</u>			¹⁰ Surface	Location			
UL or lot no.	Section 36	Township 31—N	Range 13-W	Lot Idn	Feet from the 1685	North/South line	Feet from the 820'	Rest/West line WEST	County SAN JUAN
			11 Bott	om Hole	Location	If Different F	rom Surface	and the second trans	
UL or lot no.	Section	Township	Range	Lot Idn	Peet from the	North/South lin	Pest from the	Rast/West line	County
19 D - 11 - 1 - 2 A	·	· · ·	13	2. 610	14.0	A-14- 11 11 11 11 11	150-42-25-21		en age of the fact of

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED

16	OR A NON-SIAN	DARD UNIT HAS B	EEN APPROVED DI	THE DIVISION.
1685'	65, 497, 01' E 2615.29'	LAT: 3651.5431 M. LONC: 10809.6827 W. NAD 1927. LAT: 36.659055 M. LONG: 108.162008 W. NAD 1983		17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either come a working interest or unlessed mineral interest in the land including the proposed bottom hals knowledge the hars a right to drill this well at this location pursuant to a contract with an owner of such a unnered or a working interest, or to a wolkindary pooling agreement or a computery pooling order heretalors entered by the discission.
NEW MEXICO ST OF OG-1649-1	NEW MEXICO ST OF E-3150-11	6		Printed Name Printed Name 18 SURVEYOR CERTIFICATION I havely certify that the well incufion sharm on this plain uses phinted from field units of orthod surveys much by use or under my supervision, and that the same is true and convect to the bird of my belief. 300 Date of Survey Signature and Survey of Philosopous Surveyor.
				Certificate Number 15703

BURLINGTON RESOURCES OIL & GAS COMPANY LP FARMINGTON COM 1005, 1685' FNL & 820' FWL SECTION 36, T-31-N, R-13-W, NMPM, SAN JUAN COUNTY, NM GROUND ELEVATION: 6020', DATE: NOVEMBER 12, 2007

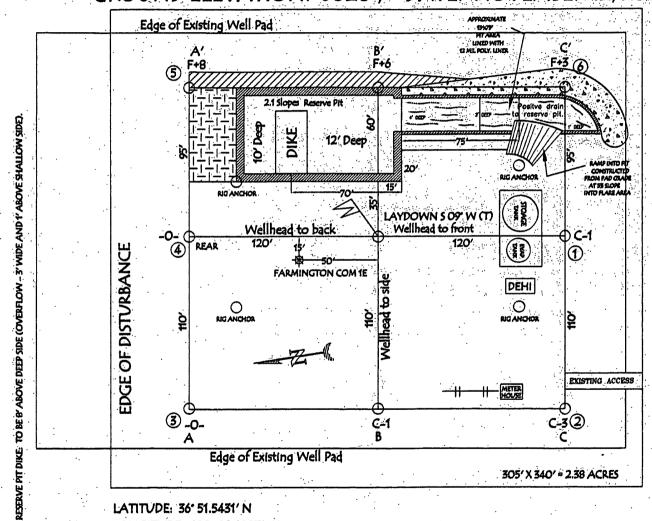

LONGITUDE: 108' 09.6827' W NAD27



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #1008	Date Reported:	08-26-08
Laboratory Number:	46846	Date Sampled:	08-20-08
Chain of Custody No:	5073	Date Received:	08-21-08
Sample Matrix:	Soil	Date Extracted:	08-25-08
Preservative:	Cool	Date Analyzed:	08-26-08
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	2.4	0.1
Total Petroleum Hydrocarbons	2.4	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Mustum Weeken
Review



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S	Date Reported:	08-26-08
Laboratory Number:	46847	Date Sampled:	08-20-08
Chain of Custody No:	5073	Date Received:	08-21-08
Sample Matrix:	Soil	Date Extracted:	08-25-08
Preservative:	Cool	Date Analyzed:	08-26-08
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample, Background

Analyst

Muster Mucelly Review

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505-632-0615 • Fax 505-632-1865



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

0 - 30%

0 - 30%

Client:	QA/QC			Project #:		N/A
Sample ID:	08-26-08	QA/QC	;	Date Reported:		08-26-08
Laboratory Number:	46846			Date Sampled:		N/A
Sample Matrix:	Methylene	Chloride	e	Date Received:		N/A
Preservative:	N/A			Date Analyzed:		08-26-08
Condition:	N/A			Analysis Reque	sted:	TPH
	I-Cal D	ate	I-Cal RF:	C-Cal RF:	% Difference	Accept Range
Gasoline Range C5 - C10	05-07-	07	9.9529E+002	9.9569E+002	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-	07	1.0028E+003	1.0032E+003	0.04%	0 - 15%
Blank Conc. (mg/L - mg/Kg)			Concentration		Detection Limit	\$ {
Gasoline Range C5 - C10			ND		0.2	
Diesel Range C10 - C28			ND		0.1	
Total Petroleum Hydrocarbons			ND		0.2	
Total Petroleum Hydrocarbons Duplicate Conc. (mg/Kg)	Samo		ND Duplicate	% Difference	0.2 Accept. Range	<u> </u>

Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept. Range
Gasoline Range C5 - C10	ND	250	247	98.8%	75 - 125%
Diesel Range C10 - C28	2.4	250	251	99.6%	75 - 125%

ND

2.2

0.0%

8.3%

ND - Parameter not detected at the stated detection limit.

References:

Gasoline Range C5 - C10

Diesel Range C10 - C28

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

ND

2.4

Comments:

QA/QC for Samples 46846 - 46847, 46849, and 46854 - 46856.

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

011	O Dh'Ill'	Duning at #1	00050 0000
Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S	Date Reported:	08-26-08
Laboratory Number:	46846	Date Sampled:	08-20-08
Chain of Custody:	5073	Date Received:	08-21-08
Sample Matrix:	Soil	Date Analyzed:	08-26-08
Preservative:	Cool	Date Extracted:	08-25-08
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	8.6	0.9	
Toluene	9.0	1.0	
Ethylbenzene	8.2	1.0	
p,m-Xylene	29.0	1.2	
o-Xylene	8.3	0.9	
Total BTEX	63.1		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	96.0 %
	1,4-difluorobenzene	96.0 %
	Bromochlorobenzene	96.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Mestern Walters
Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S Background	Date Reported:	08-26-08
Laboratory Number:	46847	Date Sampled:	08-20-08
Chain of Custody:	5073	Date Received:	08-21-08
Sample Matrix:	Soil	Date Analyzed:	08-26-08
Preservative:	Cool	Date Extracted:	08-25-08
Condition:	Intact	Analysis Requested:	BTEX
Condition.	intact	Analysis Requested.	DIEA

		Det.
	Concentration	Limit
Parameter	(ug/Kg)	(ug/Kg)
Benzene	4.7	0.9
Toluene	6.0	1.0
Ethylbenzene	2.6	1.0
p,m-Xylene	11.3	1.2
o-Xylene	2.4	0.9
Total BTEX	27.0	

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client: Sample ID:	N/A 08-26-BT QA/QC	Project #: Date Reported:	N/A 08-26-08
Laboratory Number:	46846	Date Sampled:	N/A
Sample ⁻ Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	08-26-08
Condition:	N/A	Analysis:	BTEX

Calibration and Detection Limits (ug/L)	I-Cal RF:	C-Cal RF: Accept: Rang	%Diff. je 0 - 15%	Blank Conc	Detect. Limit
Benzene	9.1240E+007	9 1423E+007	0.2%	ND	0.1
Toluene	7 1383E+007	7 1526E+007	0.2%	ND	0.1
Ethylbenzene	5 6346E+007	5 6459E+007	0.2%	ND	0.1
p,m-Xylene	1 1730E+008	1.1753E+008	0.2%	ND	0.1
o-Xylene	5 4938E+007	5.5048E+007	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample Di	uplicate	%Diff.	Accept Range	Detect. Limit
Benzene	8.6	8.8	2.3%	0 - 30%	0.9
Toluene	9.0	9.2	2.2%	0 - 30%	1.0
Ethylbenzene	8.2	8.3	1.2%	0 - 30%	1.0
p,m-Xylene	29.0	29.5	1.7%	0 - 30%	1.2
o-Xylene	8.3	8.5	2.4%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample Amo	unt Spiked Spik	ed Sample	% Recovery	Accept Range
Benzene	8.6	50.0	58.2	99.3%	39 - 150
Toluene	9.0	50.0	58.6	99.3%	46 - 148
Ethylbenzene	8.2	50.0	57.8	99.3%	32 - 160
p,m-Xylene	29.0	100	127	98.4%	46 - 148
o-Xylene	8.3	50.0	57.9	99.3%	46 - 148

ND - Parameter not detected at the stated detection limit.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996

Comments:

QA/QC for Samples 46846 - 46847, 46849, 46854 - 46858, and 46864.

Analyst

Review



TRACE METAL ANALYSIS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S	Date Reported:	08-28-08
Laboratory Number:	46846	Date Sampled:	08-20-08
Chain of Custody:	5073	Date Received:	08-21-08
Sample Matrix:	Soil	Date Analyzed:	08-25-08
Preservative:	Cool	Date Digested:	08-25-08
Condition:	Intact	Analysis Needed:	Total Metals

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	TCLP Regulatory Level (mg/Kg)
Arsenic	0.278	0.001	5.0
Barium	3.69	0.001	100
Cadmium	ND	0.001	1.0
Chromium	0.557	0.001	5.0
Lead	0.330	0.001	5.0
Mercury	ND	0.001	0.2
Selenium	ND	0.001	1.0
Silver	ND	0.001	5.0

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectroscopy, SW-846, USEPA, December 1996.

Note:

Regulatory Limits based on 40 CFR part 261 subpart C

section 261.24, August 24, 1998.

Comments:

Drilling Pit Sample.

Analyst



TRACE METAL ANALYSIS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S Background	Date Reported:	08-28-08
Laboratory Number:	46847	Date Sampled:	08-20-08
Chain of Custody:	5073	Date Received:	08-21-08
Sample Matrix:	Soil	Date Analyzed:	08-25-08
Preservative:	Cool	Date Digested:	08-25-08
Condition:	Intact	Analysis Needed:	Total Metals

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	TCLP Regulatory Level (mg/Kg)
Arsenic	0.126	0.001	5.0
Barium	0.850	0.001	100
Cadmium	ND	0.001	1.0
Chromium	0.251	0.001	5.0
Lead	0.153	0.001	5.0
Mercury	ND	0.001	0.2
Selenium	ND	0.001	1.0
Silver	ND	0.001	5.0

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectroscopy, SW-846, USEPA, December 1996.

Note:

Regulatory Limits based on 40 CFR part 261 subpart C

section 261.24, August 24, 1998.

Comments:

Drilling Pit Sample.

Analyst

Muster of Wooker Beview



TRACE METAL ANALYSIS Quality Control / Quality Assurance Report

Client:		QA/QC		Project #:			QA/QC
Sample ID:		08-25 TM	08-25 TM QA/AC		orted:		08-28-08
Laboratory Number:		46818		Date Sam	pled:		N/A
Sample Matrix:		Soil		Date Rece	eived:		N/A
Analysis Requested:		Total RCR	A Metals	Date Anal	yzed:		08-25-08
Condition:		N/A		Date Dige	sted:		08-25-08
179800 . 15000 . 15 cm	Instrument lank (mg/K	, , , , , , , , , , , , , , , , , , ,		* * * * * * * * * * * * * * * * * * *	TOTAL CONTRACTOR OF THE PARTY O	% Diff.	Acceptance Range
Arsenic	ND	ND	0.001	0.081	0.085	5.7%	0% - 30%
Barium	ND	ND	0.001	4.07	4.04	0.7%	0% - 30%
Cadmium	ND	ND	0.001	0.014	0.014	1.4%	0% - 30%
Chromium	ND	ND	0.001	0.537	0.572	6.5%	0% - 30%
Lead	ND	ND	0.001	1.49	1.54	3.6%	0% - 30%
Mercury	ND	ND	0.001	ND	ND	0.0%	0% - 30%
Selenium	ND	ND	0.001	0.029	0.027	6.6%	0% - 30%
Silver	ND	ND	0.001	ND	ND	0.0%	0% - 30%
Spike Conc. (mg/Kg)		Spike Added	Sampl	e Spiked Sample			Acceptance Range
Arsenic		0.250	0.081	0.298	90.2%		80% - 120%
Barium		0.500	4.07	3.95	86.3%		80% - 120%
Cadmium		0.250	0.014	0.264	100.2%		80% - 120%
Chromium		0.500	0.537	0.991	95.6%		80% - 120%
Lead		0.500	1.49	2.293	116%		80% - 120%
Mercury		0.100	NĎ	0.099	99.0%		80% - 120%
Selenium		0.100	0.029	0.120	93.1%		80% - 120%
Silver		0.100	ND	0.090	90.1%		80% - 120%

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectorscopy, SW-846, USEPA, December 1996.

Comments:

QA/1QC for Sample 46818 and 46840 - 46847.

Analyst



CATION / ANION ANALYSIS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S	Date Reported:	08-29-08
Laboratory Number:	46846	Date Sampled:	08-20-08
Chain of Custody:	5073	Date Received:	08-21-08
Sample Matrix:	Soil Extract	Date Extracted:	08-21-08
Preservative:	Cool	Date Analyzed:	08-22-08
Condition:	Intact		

	Analytical			
Parameter	Result	Units_		
рН	7.97	s.u.		
Conductivity @ 25° C	2,150	umhos/cm		
Total Dissolved Solids @ 180C	3,150	mg/L		
Total Dissolved Solids (Calc)	4,138	mg/L		
SAR	0.4	ratio		
Total Alkalinity as CaCO3	32.0	mg/L		
Total Hardness as CaCO3	2,910	mg/L		
Bicarbonate as HCO3	32.0	mg/L	0.52	meq/L
Carbonate as CO3	<0.1	mg/L	0.00	meq/L
Hydroxide as OH	<0.1	mg/L	0.00	meq/L
Nitrate Nitrogen	0.487	mg/L	0.01	meq/L
Nitrite Nitrogen	<0.01	mg/L	0.00	meq/L
Chloride	210	mg/L	5.92	meq/L
Fluoride	0.047	mg/L	0.00	meq/L
Phosphate	0.028	mg/L	0.00	meq/L
Sulfate	2,650	mg/L	55.17	meq/L
fron	0.038	mg/L	0.00	meq/L
Calcium	1,150	mg/L	57.39	meq/L
Magnesium	9.68	mg/L	0.80	meq/L
Potassium	47.0	mg/L	1.20	meq/L
Sodium	51.7	mg/L	2.25	meq/L
Cations			61.63	meq/L
Anions			61.63	meq/L
Cation/Anion Difference			0.00%	

Reference: U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Drilling Pit Sample.

Analyst

Mistre m Weelen



CATION / ANION ANALYSIS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S Background	Date Reported:	08-29-08
Laboratory Number:	46847	Date Sampled:	08-20-08
Chain of Custody:	5073	Date Received:	08-21-08
Sample Matrix:	Soil Extract	Date Extracted:	08-21-08
Preservative:	Cool	Date Analyzed:	08-22-08
Condition:	Intact		

	Analytical			
Parameter	Result	Units		
рH	5.37	s.u.		
Conductivity @ 25° C	4,520	umhos/cm		
Total Dissolved Solids @ 180C	2,450	mg/L		
Total Dissolved Solids (Calc)	2,290	mg/L		
SAR	0.1	ratio		
Total Alkalinity as CaCO3	16.0	mg/L		
Total Hardness as CaCO3	1,660	mg/L		
Bicarbonate as HCO3	16.0	mg/L	0.26	meq/L
Carbonate as CO3	<0.1	mg/L	0.00	meq/L
Hydroxide as OH	<0.1	mg/L	0.00	meq/L
Nitrate Nitrogen	1.78	mg/L	0.03	meq/L
Nitrite Nitrogen	0.002	mg/L	0.00	meq/L
Chloride	1.88	mg/L	0.05	meq/L
Fluoride	0.101	mg/L	0.01	meq/L
Phosphate	<0.01	mg/L	0.00	meq/L
Sulfate	1,600	mg/L	33.31	meq/L
Iron	0.062	mg/L	0.00	meq/L
Calcium	662	mg/L	33.03	meq/L
Magnesium	<0.1	mg/L	0.00	meq/L
Potassium	6.53	mg/L	0.17	meq/L
Sodium	7.70	mg/L	0.33	meq/L
Cations			33.54	meq/L
Anions			33.66	meq/L
Cation/Anion Difference			0.37%	

Reference: U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Drilling Pit Sample.

Analyst

Review

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505-632-0615 • Fax 505-632-1865



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S	Date Reported:	08-29-08
Laboratory Number:	46846	Date Sampled:	08-20-08
Chain of Custody No:	5073	Date Received:	. 08-21-08
Sample Matrix:	Soil	Date Extracted:	08-25-08
Preservative:	Cool	Date Analyzed:	08-25-08
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

84.6

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

Analyst

Mustum Weeters Review



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Farmington Com #100S	Date Reported:	08-29-08
Laboratory Number:	46847	Date Sampled:	08-20-08
Chain of Custody No:	5073	Date Received:	08-21-08
Sample Matrix:	Soil	Date Extracted:	08-25-08
Preservative:	Cool	Date Analyzed:	08-25-08
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

17.5

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample Background.

Analyst

Mustur muceters Review



EPA METHOD 418.1 TOTAL PETROLEUM **HYROCARBONS QUALITY ASSURANCE REPORT**

Client:

QA/QC

Project #:

N/A

Sample ID:

QA/QC

Date Reported:

08-28-08

Laboratory Number:

08-25-TPH.QA/QC 46840

Date Sampled:

N/A

Sample Matrix:

Freon-113

Date Analyzed:

08-25-08

Preservative: Condition:

N/A N/A

Date Extracted: Analysis Needed: 08-25-08 **TPH**

Calibration 1-Cal Date

08-22-08

C-Cal Date 1-Cal RF: C-Cal RF: % Difference

Accept. Range

08-25-08

1.680

1,610

4.2%

+/- 10%

Blank Conc. (mg/Kg)

TPH

Concentration

Detection Limit

ND

13.4

Duplicate Conc. (mg/Kg) Sample Duplicate Duplicate Duplicate

TPH

83.3

80.6

3.2%

Accept. Range +/- 30%

Spike Conc (mg/Kg) Sample

Spike Added Spike Result % Recovery Accept Range

TPH

83.3

2,000

1,810

86.9%

80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

QA/QC for Samples 46840 - 46847.

Analyst

Two Copies	rate District C	Office		State of New Mexico					Form C-105 July 17, 2008								
	N French Dr , Hobbs, NM 88240					sources)	July 17, 2008 1. WELL API NO.									
	Il W Grand Avenue, Artesia, NM 88210 Oil Conservation Division					Į	30-045-34579										
District III 1000 Rio Brazos Rd, Aztec, NM 87410 1220 South St. Francis Dr.						2 Type of Lease											
District IV 1220 S St. Francis Dr., Santa Fe, NM 87505 Santa Fe, NM 87505						ŀ	STATE FEE FED/INDIAN 3 State Oil & Gas Lease No										
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								OG-1649-1									
4 Reason for file		= HON C)R R	ECO	MPL	E HON RE	POF	RIA	NL	LOG		5 Lease Nam	e or I	Inst Agre	oment N	lame	Electrology
_							FARMING	OT			raine						
COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only)							6. Well Number 100S										
C-144 CLOS #33; attach this a	nd the plat to										l/or	1005					
7 Type of Comp		WORKOVE	RП	DEEPE	NING	□PLUGBAC	ж П	DIFFEI	REN	NT RESERV	/OIR	OTHER					
8 Name of Opera	ator											9 OGRID					-
Burlington R		Oil Gas	Com	pany,	LP							14538 11 Pool name	or W	ildeat			
PO Box 4298, Fa		M 87499															
12.Location	Unit Ltr	Section		Towns	hip	Range	Lot			Feet from	the	N/S Line	Fee	from the	E/W	E/W Line County	
Surface:															ļ <u>.</u>		
BH:				1.55								(D. 1. D.	<u> </u>			· /DE	LDVD
13 Date Spudde	1 14 Date	T.D Reach	ed	03/18		g Released			16	Date Comp	leted	(Ready to Prod	Produce) 17 Elevations (DF and RT, GR, etc.)		and KKB,		
18. Total Measur	ed Depth of	Well		19 P	lug Ba	ck Measured De	epth		20	Was Direct	tiona	l Survey Made?)	21. Ty	pe Elect	ric and O	ther Logs Run
22 Producing In	erval(s), of t	this complet	ion - T	op, Bot	tom, Na	ame								I			
23				· · · · · · · · · · · · · · · · · · ·	CAS	ING REC	OR	D (Re	enc	ort all st	ring	gs set in w	ell)				
CASING SI	ZE	WEIGHT	LB /F			DEPTH SET				LE SIZE		CEMENTIN		CORD	Δ	MOUNT	PULLED
												ļ					
			-		-						•						-
			-														
SIZE	TOP		BOT	ТОМ	LIN	ER RECORD SACKS CEN		SCRI	FEN	J	25. S17	TUBING REZE DEPTH S					
, ole	1.01		BOI	TOM		Briens CER	ALC: VI	Serti	<u> </u>	•	1012	ZE OEITH SET				THER	EK OB.
26 Perforation	record (inte	erval, size, ai	nd num	nber)						ID, SHOT, INTERVAL		ACTURE, CE					
								DEI	111	INTERVAL		AMOUNT AND KIND MATERIAL USED					
Date First Produ	etion	D	oducti	on Metl	and (FI	owing, gas lift,				TION	<u>, i</u>	Well Status	· (Pro	d or Shu	t.ml		
Date 1 list 1 lodd	ction	' '	oducti	on wica	iou (1°1	owing, gas igi, _i	ритри	1g - 512c	un	и гуре ритр	"	Wen Status	, (1 7 0	a or ona	i- <i>iii)</i>		
Date of Test	Hours T	ested .	Cho	ke Size		Prod'n For Test Period	-	Oil -	Bbl		Ga	s - MCF	"	ater - Bb	l	Gas - 0	Oil Ratio
Flow Tubing Press	Casing	Pressure		culated 24- Oil - Bbl Gas - N			- MCF		Water - Bbl Oil Gra			ravity - API - (Corr)					
29 Disposition of	of Gas (Sold,	used for fue	l, vent	ed, etc.)									30	Test Witr	essed B	у	
31 List Attachm	ents														-		
32 If a temporar	y pit was us	ed at the wel	l, attac	ch a plat	with th	e location of th	e temp	orary pi	it							1	
33. If an on-site	burial was u	sed at the we	ll, rep	ort the e	xact lo	cation of the on	-site bi	ırial.									
I hereby certi	for that the	Latitude	36.85	923333	on hat	Longitude 108	.16171	11°W	NA	D 1927	Note	to the best	of m	knowl	odaa a	nd halia	ſ
	jy inai ine La	_	1		Pri	n staes of thi nted ne Crystal				-				1/16/2	_	na vene,	,
E-mail Addre	,	,					,			ŭ							

ConocoPhilips

Pit Closure Form:
Date: 9/23/2008
Well Name: harmington Com 1005
Footages: 1685 FNL 820 FWL Unit Letter: E
Section: 36, T-31-N, R-13-W, County:55 State: NEW
Contractor Closing Pit: Ace
Construction inspector: Norman Faver Date: 9/23/2008
Inspector Signature:

Jaramillo, Marie E

From:

Busse, Dollie L

Sent:

Wednesday, September 17, 2008 3:15 PM

To:

Brandon Powell, Mark Kelly, Robert Switzer, Sherrie Landon

Cc:

acedragline@yahoo.com; 'Faver Norman'; Becker, Joey W; Bowker, Terry D; Chavez, Virgil E:

Green, Cary J; GRP:SJBU Production Leads; Kennedy, Jim R; Kramme, Jeff L; Larry Thacker; Lopez, Richard A; Loudermilk, Jerry L; Nelson, Terry J; O'Nan, Mike J.; Peace. James T; Poulson, Mark E; Richards, Brian; Stamets, Stephan A; Work, James A; Blair, Maxwell O; Blakley, Maclovia; Clark, Joan E; Cornwall, Mary Kay K; Farrell, Juanita R;

Maxwell, Mary Alice; McWilliams, Peggy L; Seabolt, Elmo F; Valencia, Desiree (SOS Staffing

Services, Inc.)

Subject:

Clean Up Notice - Farmington Com 100S

Importance:

High

Attachments:

Farmington Com 100S.pdf

Ace Services will move a tractor to the Farmington Com 100S on Monday, September 22, 2008 to start the reclamation process. Please contact Norman Faver (320-0670) if you have any questions or need additional information.

Thanks! Dollie

Network #: 10210943

Operator:

Burlington Resources

Legals:

1685' FNL, 820' FWL Section 36, T31N, R13W Unit Letter 'E' (SWNW) San Juan County, NM

Lease:

NM State of OG-1649-1

API#:

30-045-34579

Surface/Minerals:

State/State



Farmington Com 100S.pdf (274 K...

Dollie L. Busse


ConocoPhillips Company-SJBU

Construction Technician Project Development 505-324-6104 505-599-4062 (fax)


Dollie.L.Busse@conocophillips.com


ediir foota (

Construction inspector: Norman Tan Date: 10.8.2008
Seeding Date: 10/3/2005
Road Completion Date: 9/23/2008
Reclamation Date: 9/23/2008
Reclamation Contractor:
Section: 36, 7-31-N, R-13-W, County: NM State: 55
Well Marrie: Farmington Com 1005 Footsges: 1685 FNL 820 FWL Unit Letter: F
8005-8-0/ :elaG
Reclamation Form:

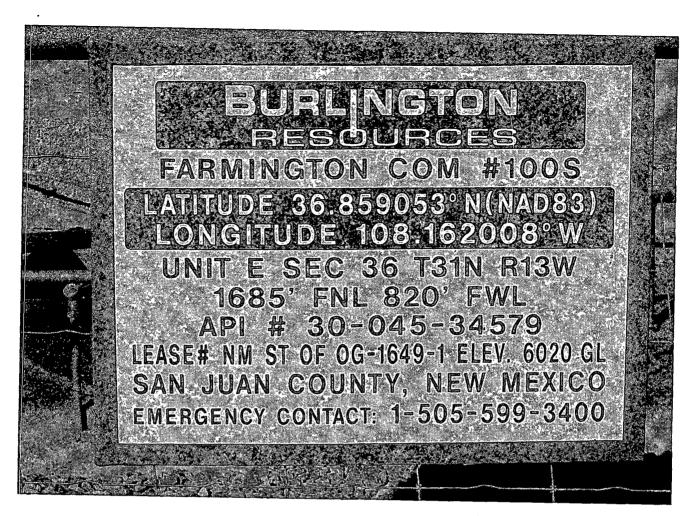



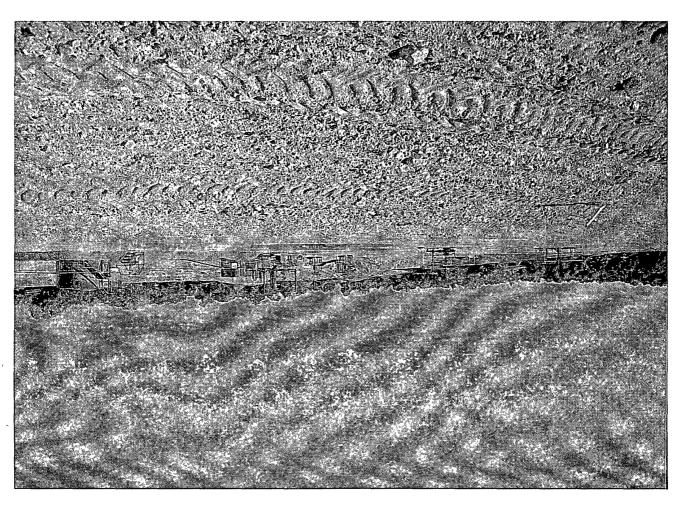

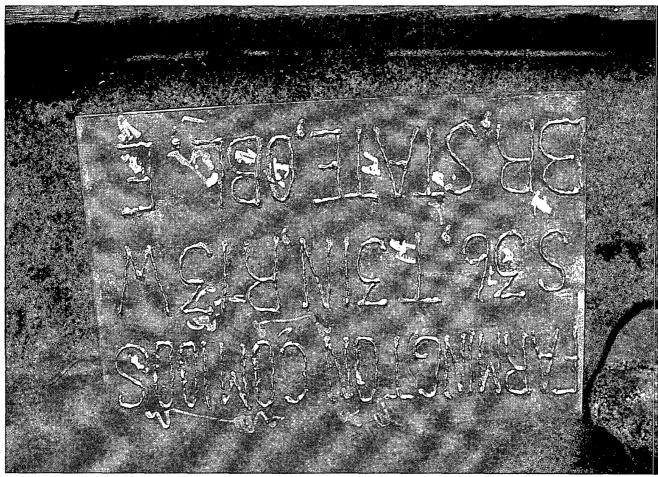

WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

WELL NAME: Farmington Com #100S

API#: 30-045-34579

DATE	INSPECTOR	SAFETY CHECK	LOCATION CHECK	PICTURES TAKEN	COMMENTS
3/19/08	Eric Smith	Х	Х		Liner torn, fence left down, called vendor to repair, notified OCD
4/25/08	Jared Chavez				Rig is on location
5/10/08	Jared Chavez	Χ	Х		Reserve pit needs water pulled, called vendor
5/29/08	Jared Chavez	Х	Х		Fence needs tightened, hole in liner, called vendor and called OCD
6/9/08	Jared Chavez	Х	Χ -		Pit and location in good condition
. 6/13/08	Jared Chavez	Х	Х		Pit and location in good condition
6/16/08	Jared Chavez	Х	Х		Pit and location in good condition
6/23/08	Jared Chavez	Х	Х	,	Pit and location in good condition
7/3/08	Jared Chavez	Х	Х		Pit and location in good condition
7/14/08	Jared Chavez	Х	Х		Pit and location in good condition
7/28/08	Jared Chavez	Х			Rig is on location
8/4/08	Jared Chavez	Х	Х		Fence needs tightened, contacted vendor for repairs
8/11/08	Jared Chavez	Χ	X .	_	Pit and location in good condition
8/18/08	Jared Chavez	Х	Х		Pit and location in good condition
8/29/08	Jared Chavez	, X	Х		Pit and location in good condition
9/12/08	Jared Chavez	Х	Х		Pit and location in good condition
9/19/08	Jared Chavez	Χ	Х		Pit and location