District I 1625 N French Dr., Hobbs, NM.88240. District III 1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM.87410 District IV 1220 S St. Francis Dr., Santa Fe, NM 87505 2009 Mar

# State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

9775	
1 10.	٠

# Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
Existing BGT	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system
below-grade tank	x, or proposed alternative method
Df	

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances

1.	
Operator:         XTO Energy, Inc.         OGRID #:         53/2           Address:         #382 County Road 3100, Aztec, NM 87410	
Facility or well name:Florance LS #4	
API Number: 30-045-06472 OCD Permit Number:	
U/L or Qtr/Qtr K Section 18 Township 27N Range 08W County	
Center of Proposed Design Latitude 36.572300 Longitude 107.724800	NAD [1927 [X] 1983
Surface Owner.  Federal  State  Private  Tribal Trust or Indian Allotment	
Pit: Subsection F or G of 19.15.17.11 NMAC	RCVD WAR 12'12
Temporary.  Drilling  Workover	OIL CONS. DIV.
Permanent Emergency Cavitation P&A	DIST. 3
Lined Unlined Liner type: Thicknessmil ther	
String-Reinforced	
Liner Seams   Welded   Factory   Other   bbl Dimensio	ns: L x W x D
Lined   Unlined Liner type: Thickness   mil     String-Reinforced     Liner Seams   Welded   Factory   Other     String-Reinforced     Liner Seams   Welded   Factory   Other     Subsection H of 19 15.1     Type of Operation   P&A   Drilling a new well intent)     Drying Pad   Above Ground Steel Tanks   Hau. of Bins   Other     Lined   Unlined Liner type: Thickness   mil   LLDPE   HDPE   PVC   Other     Liner Seams   Welded   Factory   Other	
4.  Below-grade tank: Subsection I of 19.15.17.11 NMAC	
Volume: 11, 4 95 bbl Type of fluid: Produced Water	
Tank Construction material: Steel	
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut	-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ Other Visible sidewalls, vaulted, automatic high-le	
Liner type: Thickness mil	
5.  Alternative Method:  Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau	office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing	hospītāl,		
7.  Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen □ Netting ☑ Other Expanded metal or solid vaulted top  Monthly inspections (If netting or screening is not physically feasible)			
<ul> <li>8.</li> <li>Signs: Subsection C of 19.15 17.11 NMAC</li> <li>☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers</li> <li>☑ Signed in compliance with 19.15.3.103 NMAC</li> </ul>			
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for		
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.			
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No		
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA		
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No		
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes 🏻 No		
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No		
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ⊠ No		
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No		

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached.  ☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC.
<ul> <li>☑ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC</li> <li>☑ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC</li> <li>and 19 15 17.13 NMAC</li> </ul>
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number. (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19 15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Climatological Factors Assessment  Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC  Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC  Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC  Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC  Quality Control/Quality Assurance Construction and Installation Plan  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Nuisance or Hazardous Odors, including H <sub>2</sub> S, Prevention Plan  Emergency Response Plan  Oil Field Waste Stream Characterization  Monitoring and Inspection Plan  Erosion Control Plan  Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17 9 NMAC and 19.15 17.13 NMAC
Proposed Closure: 19.15 17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative  Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)
<ul> <li>☐ On-site Closure Method (Only for temporary pits and closed-loop systems)</li> <li>☐ In-place Burial</li> <li>☐ On-site Trench Burial</li> <li>☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)</li> </ul>
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office o	vo				
Disposal Facility Name:    Disposal Facility Permit Number:					
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations:    Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC   Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.10 NMAC   Interval In					
Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC   Siting Criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  Topographic map, Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well fiel	rations?				
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office of considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  Topographic map, Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  Written confirmation or verif					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map, Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality  Within 500 feet of a wetland.	Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or				
- NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - 'Topographic map, Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of initial application  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality  Within 500 feet of a wetland.	] No				
NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - 'Topographic map, Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality  Within 500 feet of a wetland.	] No				
lake (measured from the ordinary high-water mark).  Topographic map, Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Within 500 feet of a wetland.	] No				
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality  Within 500 feet of a wetland.	] No				
watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Within 500 feet of a wetland.	] No				
adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality  Within 500 feet of a wetland.	] No				
	] No				
	] No				
Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	] No				
Within an unstable area.  - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	] No				
Within a 100-year floodplain FEMA map	] No				
18 On Site Classes Dis. Charles (10.15.12.12.2014.C) I. and G. H. dis. Cit. Cit. Cit. Cit. Cit. Cit. Cit. Cit	11				
On-Site Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15 17 13 NMAC  Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC  Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC  Protocols and Procedures - based upon the appropriate requirements of 519.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)  Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC					

19. Operator Application Certification:			
I hereby certify that the information submitted with this application is true, accurately	rate and complete to	the best of my knowledge and belief.	
Name (Print): Kim Champlin	Title:	Environmental Representative	
Signature: Him Champlin	Date:	02/25/2009	
e-mail address: kim_champlin@xtoenergy.com	Telephone:	···	
20.			
OCD Approval: Permit Application (including closure plan)	- CN	ent)	
OCD Representative Signature:	DEN	0/22/1	<u> </u>
Title: Frimment tricides	Josure Permit	· -	
21.			
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior The closure report is required to be submitted to the division within 60 days of section of the form until an approved closure plan has been obtained and the	to implementing any the completion of the closure activities hav	y closure activities and submitting the closo e closure activities. Please do not completo e been completed.	
	★ Closure Cor	npletion Date: <u>J- 9 - 1 2</u>	
22. Closure Method: Waste Excavation and Removal On-Site Closure Method Altern If different from approved plan, please explain.	native Closure Metho	d  Waste Removal (Closed-loop system	ns only)
23. Closure Report Regarding Waste Removal Closure For Closed-loop System	s That Utilize Abov	e Ground Steel Tanks or Haul-off Bins O	nlv:
Instructions: Please indentify the facility or facilities for where the liquids, dr			
two facilities were utilized.	Dispessal Essility	Downit Niverhous	
Disposal Facility Name:		Permit Number:	
Disposal Facility Name:  Were the closed-loop system operations and associated activities performed on or			,
Yes (If yes, please demonstrate compliance to the items below) No	7 III al oas alat 7777 775	77 00 4000 101 141410 001 1100 4114 0 p -1 4110 110	
Required for impacted areas which will not be used for future service and opera	tions:	·	
☐ Site Reclamation (Photo Documentation) ☐ Soil Backfilling and Cover Installation			
Re-vegetation Application Rates and Seeding Technique			
24. Closure Report Attachment Checklist: Instructions: Each of the following	items must be attache	ed to the closure report. Please indicate, b	y a check
mark in the box, that the documents are attached.	•	•	
Proof of Closure Notice (surface owner and division)  Proof of Deed Notice (required for on-site closure)			
Plot Plan (for on-site closures and temporary pits)			
Confirmation Sampling Analytical Results (if applicable)			
☐ Waste Material Sampling Analytical Results (required for on-site closure) ☐ Disposal Facility Name and Permit Number	•		
Soil Backfilling and Cover Installation			
Re-vegetation Application Rates and Seeding Technique			
Site Reclamation (Photo Documentation) On-site Closure Location: Latitude Long	ıtude	NAD· □1927 □ 1983	3
25.			
Operator Closure Certification:			
I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure require			ge and
Name (Print). Logar Hixon	Title: <u>En</u>	viconmental Technicio	an_
Signature: Joga /		J-16-12	
e-mail address: Lacan Hivan @ X40 c 17 & CSV . CAM		(505) 233-3683	

District I , 1625 N French Dr , Hobbs, NM 88240 District II 1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S St Francis Dr , Santa Fe, NM 87505

### State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-141 Revised October 10, 2003

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

## **Release Notification and Corrective Action**

	OPERATOR			
Name of Company: XTO Energy, Inc.  Contact: Logan Hixon				
Address: 382 Road 3100, Aztec, New Mexico 87410	Telephone No.: (505) 333-3683			
Facility Name: Florance LS #4 (API 30-045-06472)	Facility Type: Gas Well (Mesa V	(erde)		
Surface Owner: Federal Mineral Owner	•	Lease No.: NMSF078625		
LOCATIO	ON OF RELEASE			
	1	t/West Line   County		
K 18 27 N 8 W 1550	FSL 1825	FWL San Juan County		
	00Longitude: W-107.724800			
	E OF RELEASE			
Type of Release: Produced Water Source of Release: BGT 95 BBL	Volume of Release Unknown   Volume Recovered: None     Date and Hour of Occurrence: Date and Hour of Discovery			
Source of Release. Bol 93 BBE	Historical	November 7, 2011		
Was Immediate Notice Given? ☐ Yes ☐ No ☒ Not Required	If YES, To Whom?			
By Whom?	Date and Hour.			
Was a Watercourse Reached?	If YES, Volume Impacting the Wa	atercourse		
☐ Yes ☒ No				
If a Watercourse was Impacted, Describe Fully.*				
Describe Cause of Problem and Remedial Action Taken.*  The two below grade tank were taken out of service at the Florance LS #4 well site due to the plugging and abandoning of this well site. A composite sample was collected beneath the location of the on-site BGT's, and submitted for laboratory analysis for TPH via USEPA Method 418 1 and 8015, Benzene and BTEX via USEPA Method 8021, and for total chlorides. The sample for the 21 bbl BGT returned results below the 'Pit Rule' spill confirmation standards for TPH, Benzene, Total BTEX and the total chlorides. The sample for the 95 bbl BGT returned results below the 'Pit Rule' spill confirmation standards for Benzene, Total BTEX and equal to the 'Pit Rule' spill confirmation standards for chlorides, but above the 'pit rule' standards for TPH, confirming that a release had occurred at this location. The site was then ranked pursuant to the NMOCD Guidelines for the Remediation of Leaks, Spills, and Releases. The NMOCD ranking for this site is a 10 due to a distance of less than 1000' to a dry arroyo. This set the closure standard to 1000 ppm TPH, 50 ppm BTEX and 10 ppm benzene.				
Describe Area Affected and Cleanup Action Taken * Based on TPH results of 1380 PPM beneath the 95 bbl BGT, it has been confirmed that a release had occurred at this location				
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.				
	<u>OIL CONSER</u>	VATION DIVISION		
Signature.		ļ		
Printed Name: Logan Hixon	Approved by District Supervisor			
Title: Environmental Technician	Approval Date.	Expiration Date.		
E-mail Address. Logan_Hixon@xtoenergy.com	Conditions of Approval:	Attached		
Date: 3/6/2012 Phone: 505-333-3683				

# XTO Energy Inc. San Juan Basin Below Grade Tank Closure Report

Lease Name: Florance LS #4 API No.: 30-045-06472

Description: Unit K, Section 18, Township 27N, Range 8W, San Juan County

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

#### General Plan

1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.

Closure Date is January 9, 2012

2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.

Closure Date is January 9, 2012

3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.

Required C-144 Form is attached to this document.

4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B
Soil contaminated by exempt petroleum hydrocarbons
Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005

Produced water

All liquids and sludge were removed from the tank prior to closure activities.

5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
XTO has removed the below grade tanks, and will dispose of them at a division approved facility, or recycle, reclaim or reuse it in a manner that is approved by the division.

6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.

All equipment has been removed due to the plugging and abandoning of the Florance LS #4

7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

A five point composite sample was taken of the pits using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

#### 21 BBL BGT

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	< 0.0031 mg/kg
BTEX	EPA SW-846 8021B or 8260B	50	< 0.0464 mg/kg
TPH	EPA SW-846 418.1	100	72 mg/kg
Chlorides	EPA 300.1	250 or background	64 mg/kg

#### 95 BBL BGT

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	< 0.0032 mg/kg
BTEX	EPA SW-846 8021B or 8260B	50	< 0.0479 mg/kg
ТРН	EPA SW-846 418.1	100	1380 mg/kg
Chlorides	EPA 300.1	250 or background	=250 mg/kg

- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
  - Due to TPH results of 1380 PPM beneath our 95 bbl BGT, a release has been confirmed for this location. A C-141 Release Notification form will be sent outlining any remediation activities taken regarding this release.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
  - The pit cellars were backfilled using compacted, non-waste containing earthen material, with a division prescribed soil cover.
- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally. The notification will include the following:

- i. Operator's name
- ii. Well Name and API Number
- iii. Location by Unit Letter, Section, Township, and Range

Notification was provided to Mr. Brandon Powell with the Aztec office of the OCD via email on December 30, 2011; see attached email printout.

The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.

The surface owner was notified on December 30, 2011 via email. Email has been approved as a means of surface owner notification to the BLM by Brandon Powell, NMOCD Aztec Office.

11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The location has been recontoured to match the above specifications.

12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The site has been backfilled to match these specifications.

- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

  Site will be reclaimed pursuant to the BLM MOU.
- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
  - i. Proof of closure notice to division and surface owner; attached
  - ii. Details on capping and covering, where applicable; per OCD Specifications
  - iii. Inspection reports; attached
  - iv. Confirmation sampling analytical results; attached
  - v. Disposal facility name(s) and permit number(s); see above
  - vi. Soil backfilling and cover installation; per OCD Specifications
  - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable); **Per BLM MOU.**
  - viii. Photo documentation of the site reclamation. attached



Johnson State Children Line Co. The St.

NON-CONFORMANCE FORM
Login No.: 1544273  Date: 10/28/11  Evaluated by: MAHS  Client: XTORNM
Non-Conformance (check applicable items)
□ Parameter(s) past holding time □ Improper temperature □ Improper container type □ Improper preservation □ Improper preservation □ Broken container(s) (See below)
□ Container lid not intact □ Broken container sufficient sample
Volume remains for analysis requested (See below)  If no COC· Received by
Login Instructions:  TSR Initials:
Client informed by call / email / fax / voice mail date: 10/31 time. 9:15  Client contact: BTEX GRO DRO
TS



12065 Lebanon Rd Mt Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I D 62-0814289

Est 1970

James McDaniel XTO Energy - San Juan Division 382 County Road 3100 Aztec, NM 87410

#### Report Summary

Monday November 07, 2011

Report Number: L544273 Samples Received: 10/29/11 Client Project:

Description: BGT Closure / Florance LS 4

The analytical results in this report are based upon information supplied by you, the client, and are for your exclusive use. If you have any questions regarding this data package, please do not hesitate to call.

Entire Report Reviewed By:

Daphne Richards , ESC Representative

#### Laboratory Certification Numbers

A2LA - 1461-01, AIHA - 100789, AL - 40660, CA - I-2327, CT - PH-0197, FL - E87487 GA - 923, IN - C-TN-01, KY - 90010, KYUST - 0016, NC - ENV375/DW21704, ND - R-140 NJ - TN002, NJ NELAP - TN002, SC - 84004, TN - 2006, VA - 00109, WV - 233 AZ - 0612, MN - 047-999-395, NY - 11742, WI - 998093910, NV - TN000032008A, TX - T104704245, OK-9915, PA - 68-02979

Accreditation is only applicable to the test methods specified on each scope of accreditation held by ESC Lab Sciences

Note The use of the preparatory EPA Method 3511 is not approved or endorsed by the CA ELAP

This report may not be reproduced, except in full, without written approval from ESC Lab Sciences Where applicable, sampling conducted by ESC is performed per guidance provided in laboratory standard operating procedures 060302, 060303, and 060304



12065 Lebanon Rd Mt Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I D 62-0814289

Est 1970

REPORT OF ANALYSIS

November 07,2011

James McDaniel XTO Energy - San Juan Division 382 County Road 3100 Aztec, NM 87410

ESC Sample # L544273-01

Date Received October 29, 2011
Description : BGT Closure / Florance LS 4

Site ID : FLORANCE LS 4 Sample ID 21 BBL BGT Project #

Collected By : Brad Griffith Collection Date : 10/28/11 07 57

Parameter	Dry Result	Det Lımit	Units	Method	Date	Dil
Chloride	64.	12	mg/kg	9056	11/03/11	1
Total Solids	81.		용	2540G	11/04/11	1
Benzene	BDL	0.0031	mg/kg	8021/8015	11/01/11	5
Toluene	BDL	0.031	mg/kg	8021/8015	11/01/11	5
Ethylbenzene	BDL	0 0031	mg/kg	8021/8015	11/01/11	5
Total Xylene	BDL	0.0092	mg/kg	8021/8015	11/01/11	5
TPH (GC/FID) Low Fraction	BDL	0 62	mg/kg	GRO	11/01/11	5
Surrogate Recovery-%			3, 3		• • •	
a,a,a-Trifluorotoluene(FID)	94 5		% Rec	8021/8015	11/01/11	5
a,a,a-Trifluorotoluene(PID)	93 7		% Rec.	8021/8015	11/01/11	5
TPH (GC/FID) High Fraction Surrogate recovery(%)	BDL	4 9	mg/kg	3546/DRO	11/04/11	1
o-Terphenyl	59 9		% Rec.	3546/DRO	11/04/11	1

Results listed are dry weight basis. BDL - Below Detection Limit Det. Limit - Practical Quantitation Limit(PQL)

This report shall not be reproduced, except in full, without the written approval from ESC The reported analytical results relate only to the sample submitted Reported 11/07/11 14 53 Printed: 11/07/11 15.09



12065 Lebanon Rd Mt Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I D 62-0814289

Est 1970

#### YOUR LAB OF CHOICE

REPORT OF ANALYSIS

November 07,2011

James McDaniel XTO Energy - San Juan Division 382 County Road 3100 Aztec, NM 87410

ESC Sample # L544273-02

Date Received . October 29, 2011
Description : BGT Closure / Florance LS 4

Site ID FLORANCE LS 4

Sample ID

: 95 BBL BGT

Project #

Collected By · Brad Griffith Collection Date : 10/28/11 07 59

Parameter	Dry Result	Det Limit	Units	Method	Date	Dıl
Chloride	250	13.	mg/kg	9056	11/03/11	1
Total Solids	79		8	2540G	11/04/11	1
Benzene Toluene Ethylbenzene Total Xylene TPH (GC/FID) Low Fraction Surrogate Recovery-%	BDL BDL BDL BDL	0 0032 0 032 0 0032 0.0095 0.63	mg/kg mg/kg mg/kg mg/kg mg/kg	8021/8015 8021/8015 8021/8015 8021/8015 GRO	11/01/11 11/01/11 11/01/11 11/01/11 11/01/11	5 5 5 5
a,a,a-Trifluorotoluene(FID) a,a,a-Trifluorotoluene(PID)	94 4 94 5		% Rec % Rec	8021/80 <b>1</b> 5 8021/8015	11/01/11 11/01/11	
TPH (GC/FID) High Fraction	31	5.1	mg/kg	3546/DRO	11/03/11	1
Surrogate recovery(%) o-Terphenyl	71.2		% Rec.	3546/DRO	11/03/11	1

Results listed are dry weight basis BDL - Below Detection Limit
Det Limit - Practical Quantitation Limit(PQL)

This report shall not be reproduced, except in full, without the written approval from ESC. The reported analytical results relate only to the sample submitted Reported 11/07/11 14.53 Printed. 11/07/11 15.09



12065 Lebanon Rd Mt Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I D 62-0814289

Est 1970

YOUR LAB OF CHOICE XTO Energy - San Juan Division James McDaniel 382 County Road 3100

Aztec, NM 87410

Quality Assurance Report Level II

L544273

November 07, 2011

DDD 3	Dan: 31	Laboratory		7	D	Date 31
Analyte	Result	Units	% Rec	Limit	Batch	Date Analyze
Benzene .	-< 0005	mq/kg·		t	· WG563388	3 11/01/11 12
Sthylbenzene	< 0005	mg/kg				3 11/01/11 12
Coluene	< 005	mg/kg				3 11/01/11 12
TPH (GC/FID) Low Fraction	< , 1	mg/kg		-		3, 11/01/11 12
Cotal Xylene	< 0015	mg/kg	, ,			3 11/01/11 12
, a, a-Trifluorotoluene (FID)	- 0023	% Rec	95 09	59-128		3 11/01/11 12
,a,a-Trifluorotoluene(PID)	•	% Rec	95 09	54-144		3 11/01/11 12
Chloride	< 10	mg/kg			WG563720	11/03/11 10
Total Solids	< 1	*			WG563566	5 11/04/11 12
IPH (GC/FID) High Fraction	< 4	mqq			WG563943	1-11/04/11 14
o-Terphenyl	-	% Rec	76 10	50-150		11/04/11 14
FPH (GC/FID) High Fraction	< 4	mqq			., WG563742	2 11/03/-11 17
o-Terphenyl		% Rec	66 04	50-150	WG563742	2 11/03/11 17
		Duplic	ate			
nalyte	Units	Result Dup	licate RPD	Limit	Ref San	np Batch
otal Solids	8	91 0 86 '	2 5 73*	* , , e = + 6 × = 16 , 18 , 18 , 18 .	L544344	r-07 ' WG5635
		Laboratory Con	trol Samble			
analyte	Units	Known Val	Result	% Rec	Limit	Batch
Senzene is the company of the series of the	mg/kg	05 '	0 0465	\$ " 93 1 1. " ( ) )	ر با <sup>17</sup> 7,6%113 د	, WG5633
thylbenzene	mg/kg	05	0 0446	89 3	78-115	WG5633
oluene	mg/kg	05	0 0484	96 7	76-114	WG5633
otal Xylene	mg/kg	15	্বি 🖫 01 132 📜 🕟	1 1 1 8 87 1 9 1 Sec. 3 2 .	🥠 🔭 81-118 <sup>1</sup>	WG563
,a,a-Trifluorotoluene (PID)	, 3. 3		27,74	93 74	54-144	WG563
PH (GC/FID) Low Fraction	mg/kg	55,	5 38	97 8	67-135	WG5633
,a,a-Trifluòrotoluene(FID)				103-2	59-128	` ₩d5633
hloride	mg/kg	200	210	105	85-115	WG5637
i i		•		1 1 1 1 1 1 1 1	* • . • • •	a - v - i
otal Solids	*	50	50 0	100	85-155	WG5635
PH (GC/FID) High Fraction	ppm	60 · , '	45 5	75 8	50-150	
-Terphenyl				73 51	50-150	WG5635
PH (GC/FID) High Fraction	ppm	60	49 5 .	82 6	` 50-150	
o-Terphenyl			<del></del>	80 15	50-150	WG5637
	La	boratory Control				
nalyte	Units R	esult Ref	*Rec	Limit R	PD L:	lmit Batch
enzene .		0458 0 0465	92 0 ~		53 & 20	
		0441 0 0446	88 0	78-115 1	29 20	WG563
thylbenzene Oluene		0481 0 0484	96 0 ^' 83 0	76-114 0	600 20	WG563

For additional information, please see Attachment A 'List of Analytes with QC Qualifiers '



XTO Energy - San Juan Division James McDaniel 382 County Road 3100

Aztec, NM 87410

12065 Lebanon Rd Mt Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I D 62-0814289

Est 1970

# Quality Assurance Report Level II

L544273

November 07, 2011

a.a.a-Trifluorotoluene(PID) TPH (GC/FID) Low Fraction mg/kg 5 50 5 38 100 67-135 2 36 20 WG56: a.a.a-Trifluorotoluene(FID)  mg/kg 205 210 102 85-115 2 41 20 WG56: Chloride mg/kg 205 210 102 85-115 2 41 20 WG56: TPH (GC/FID) High Fraction ppm 49 0 45 5 82 0 50-150 7 35 25 WG56: O-Terphenyl  ppm 45 2 49 5 75 0 50-150 9 26 25 WG56: O-Terphenyl  mg/kg 0 213 0 00370 05 85 1 32-137 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 213 0 00370 05 96 20-142 L544313-01 WG56: TRH (GC/FID) Low Fraction mg/kg 0 249 0 05 99 6 20-142 L544313-01 WG56: TRH (GC/FID) Low Fraction mg/kg 0 695 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) Low Fraction mg/kg 0 695 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) Limit Fraction mg/kg 0 695 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) Limit Fraction mg/kg 0 695 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) Limit Fraction mg/kg 0 695 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 695 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) Limit Fraction mg/kg 0 695 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 895 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 895 0650 15 84 2 16-141 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 194 0.213 77 4 32-137 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 194 0.213 77 4 32-137 9 4 29 Limit Ref Samp Barch TRH (GC/FID) High Fraction mg/kg 0 208 0 230 81 81 10-150 10 11 44 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 208 0 230 81 81 20-150 10 11 44 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 208 0 209 81 81 10-150 10 11 44 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 208 0 209 81 81 10-150 10 11 44 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 206 0 249 90 2 20-142 9 84 42 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 206 0 249 90 2 20-142 9 84 42 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 206 0 249 90 2 20-142 9 84 42 L544313-01 WG56: TRH (GC/FID) High Fraction mg/kg 0 206 0 206 0 249 90 2 20-142 9 84 42 L54			Laborator	ry Control Sa	mple Dupl	icate			
THH (GC/FID) Low Fraction mg/kg 5 50 5 38 100 67-135 2 36 20 WGS6:	Analyte	Units	Result	Ref	*Rec	Limit	RPD	Limit	Batch
THH (GC/FID) Low Fraction mg/kg 5 50 5 38 100 67-135 2 36 20 WGS6:	a a a-Trifluorotoluono(DID)				. 03 '05				
Analyte		ma /lea	F FA '	F 30				, ,	
Chloride mg/kg 205 210 102 85-115 2 41 20 WGS6:  TPH (GC/FID) High Fraction		mg/kg	5 50	5 36			2 36	20	
TPH (GC/FID) High Fraction	a, a, a-11111dolocoldene (F1D)				103 2	59-128			
O-Terphenyl  TH (GC/FID) High Fraction  TH (GC/F	Chloride	mg/kg	205	210	102	85-115	2 41	20	WG563720
O-Terphenyl  TH (GC/FID) High Fraction  TH (GC/F	TPH (GC/FID) High Fraction	м́аа	49 0	45 5	82 0	50-150	7 35	25	. WG563941
Analyte   Contempt					78 06				WG56394
Analyte   Contempt									
Matrix Spike   Name		ppm	45 2	49 5			9 26	25	WG56374
Note	o-Terphenyl				74 51	50-150			WG56374
Note				Matrix Spi	ke				
Ethylbenzene mg/kg 0 230 0 00370 05 90 6 10-150 L544313-01 WG563 mg/kg 0 249 0 05 99 6 20-142 L544313-01 WG563 a,a,a-Trifluorotoluene(PID) mg/kg 0 695 0 0630 15 84 2 16-141 L544313-01 WG563 a,a,a-Trifluorotoluene(PID) 94 34 54-144 WG563 a,a,a,a-Trifluorotoluene(PID) 98 75 59-128 WG563 WG	Analyte	Units	MS Res	-		% Rec I	Limit	Ref Samp	Batch
Ethylbenzene mg/kg 0 230 0 00370 05 90 6 10-150 L544313-01 WG563 mg/kg 0 249 0 05 99 6 20-142 L544313-01 WG563 a,a,a-Trifluorotoluene(PID) mg/kg 0 695 0 0630 15 84 2 16-141 L544313-01 WG563 a,a,a-Trifluorotoluene(PID) 94 34 54-144 WG563 a,a,a,a-Trifluorotoluene(PID) 98 75 59-128 WG563 WG									
Toluene mg/kg 0 249 0 05 99 6 20-142 L544313-01 WG563				-					WG563388
Total Xylene									WG563388
a,a,a-Trifluorotoluene(PID) TPH (GC/FID) Low Fraction TPH (GC/FID) Low Fraction TPH (GC/FID) Low Fraction TPH (GC/FID) High Fraction TPH (GC/FID) Low Fraction TPH (GC/FID) Low Fraction TPH (GC/FID) High Fractio				-				L544313-01	WG563388
TPH (GC/FID) Low Fraction a, a, a-Trifluorotoluene (FID) mg/kg 24 6 0 5 5 89 6 55-109 L544313-01 WG563 a, a, a-Trifluorotoluene (FID) mg/kg 24 6 0 5 5 89 75 59-128 MG563 MG56		mg/kg	0 695	0 0630	15		16-141	L544313-01	WG563388
A, a, a-Trifluorotoluene (FID)  ### (GC/FID) High Fraction   ppm   116   70 0   60   76 6   50-150   L544298-02   WG563   WG56						94 34 5	54-144		WG563388
TPH (GC/FID) High Fraction ppm 116 70 0 60 76 6 50-150 L544298-02 WG563 o-Terphenyl		mg/kg	24 6	0	5 5	89 6	55-109	L544313-01	WG563388
O-Terphenyl 83 54 50-150 WG563  TPH (GC/FID) High Fraction ppm 46 3 0 60 77 2 50-150 L544425-38 WG563 58 41 50-150 WG563	a,a,a-Trifluorotoluene(FID)					98 75 5	59-128	•	WG563388
O-Terphenyl 83 54 50-150 WG563  TPH (GC/FID) High Fraction ppm 46 3 0 60 77 2 50-150 L544425-38 WG563 58 41 50-150 WG563	TPH (GC/FID) High Fraction	nnm	116	70 0	60	76.6	10-150	T E44299 - 02	WG563742
TPH (GC/FID) High Fraction ppm 46 3 0 60 77 2 50-150 L544425-38 WG563 o-Terphenyl		ppm	110	70 0	00			11544230-02	WG563742
Matrix Spike Duplicate   Matrix Spike Duplic									
Matrix Spike Duplicate  Analyte  Units MSD  Ref Trec  Limit RFD  Limit Ref Samp  Batch  Benzene  mg/kg 0 194 0.213 77 4 32-137 9 42 39 L544313-01 WG563  Ethylbenzene  mg/kg 0 208 0 230 81 8 10-150 10 1 44 L544313-01 WG563  mg/kg 0 226 0 249 90 2 20-142 9 84 42 L544313-01 WG563  mg/kg 0 627 0 695 75 3 16-141 10 2 46 L544313-01 WG563  mg/kg 0 627 0 695 75 3 16-141 10 2 46 L544313-01 WG563  mg/kg 0 627 0 695 75 3 16-141 10 2 46 L544313-01 WG563  mg/kg 0 627 0 695 75 3 16-141 10 2 46 L544313-01 WG563  mg/kg 0 3 54-144  TPH (GC/FID) Low Fraction  mg/kg 23 7 24 6 86 2 55-109 3 84 20 L544313-01 WG563  mg/kg 23 7 24 6 86 2 55-109 3 84 20 L544313-01 WG563  mg/kg 0 3 7 116 0* 50-150 52 6* 25 L544298-02 WG563  mg/kg 0 83.78 50-150 10 3 25 L54425-38 WG563  TPH (GC/FID) High Fraction  ppm 41 8 46 3 69 6 50-150 10 3 25 L544425-38 WG563	TPH (GC/FID) High Fraction	ppm	46 3	0	60		50-150	L544425-38	WG56394
## Analyte Units MSD Ref Tree Limit RPD Limit Ref Samp Batch  ## Benzene : mg/kg 0 194 0.213 77 4 32-137 9 42 39 L544313-01 WG563  ## Ethylbenzene mg/kg 0 208 0 230 81 8 10-150 10 1 44 L544313-01 WG563  ## Total Xylene : mg/kg 0 226 0 249 90 2 20-142 9 84 42 L544313-01 WG563  ## a,a-Trifluorotoluene(PID)	o-Terphenyl ·	•		·		58 41 '.' ' 5	50-150 ·		WG56394:
## Analyte Units MSD Ref Tree Limit RPD Limit Ref Samp Batch  ## Benzene : mg/kg 0 194 0.213 77 4 32-137 9 42 39 L544313-01 WG563  ## Ethylbenzene mg/kg 0 208 0 230 81 8 10-150 10 1 44 L544313-01 WG563  ## Total Xylene : mg/kg 0 226 0 249 90 2 20-142 9 84 42 L544313-01 WG563  ## a,a-Trifluorotoluene(PID)			Mode	man Coales Du	-1				
Benzene         mg/kg         0 194         0.213         77 4         32-137         9 42         39         L544313-01         WG563           Ethylbenzene         mg/kg         0 208         0 230         81 8         10-150         10 1         44         L544313-01         WG563           Total Xylene         mg/kg         0 226         0 249         90 2         20-142         9 84         42         L544313-01         WG563           a, a, a-Trifluorotoluene(PID)         mg/kg         0 627         0 695         75 3         16-141         10 2         46         L544313-01         WG563           TPH (GC/FID) Low Fraction a, a, a-Trifluorotoluene(PID)         mg/kg         23 7         24 6         86 2         55-109         3 84         20         L544313-01         WG563           TPH (GC/FID) High Fraction         ppm         67 7         116         0*         50-150         52 6*         25         L544298-02         WG563           TPH (GC/FID) High Fraction         ppm         41 8         46 3         69 6         50-150         10 3         25         L544425-38         WG563	Analyte	Units				Limit RF	D Limit	Ref Samp	Batch
Ethylbenzene mg/kg 0 208 0 230 81 8 10-150 10 1 44 L544313-01 WG563 TOLURE mg/kg 0 226 0 249 90 2 20-142 9 84 42 L544313-01 WG563 a,a,a-Trifluorotolurene(PID) mg/kg 0 627 0 695 75 3 16-141 10 2 46 L544313-01 WG563 a,a,a-Trifluorotolurene(PID) mg/kg 23 7 24 6 86 2 55-109 3 84 20 L544313-01 WG563 a,a,a-Trifluorotolurene(FID)									
Toluene mg/kg 0 226 0 249 90 2 20-142 9 84 42 L544313-01 WG563 Total Xylene mg/kg 0 627 0 695 75 3 16-141 10 2 46 L544313-01 WG563 a,a,a-Trifluorotoluene(PID) 94 03 54-144 WG563 TPH (GC/FID) Low Fraction mg/kg 23 7 24 6 86 2 55-109 3 84 20 L544313-01 WG563 TPH (GC/FID) High Fraction ppm 67 7 116 0* 50-150 52 6* 25 L544298-02 WG563 TPH (GC/FID) High Fraction ppm 41 8 46 3 69 6 50-150 10 3 25 L544425-38 WG563	Benzene : .				-				WG563388
Total Xylene (1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1	Ethylbenzene	mg/kg	0 208	0 230 81	8	10-150 10	1 44	L544313-01	WG563388
a,a,a-Trifluorotoluene(PID)       94 03       54-144       WG563         TPH (GC/FID) Low Fraction       mg/kg 23 7 24 6 86 2 55-109 3 84 20 L544313-01 WG563       a,a,a-Trifluorotoluene(FID)        WG563         TPH (GC/FID) High Fraction       ppm 67 7 116 0*       50-150 52 6* 25 L544298-02 WG563       WG563         TPH (GC/FID) High Fraction       ppm 41 8 46 3 69 6 50-150 10 3 25 L544425-38 WG563	Toluene	mg/kg	0 226	0 249 90	2	20-142 9	84 42	L544313-01	WG56338
TPH (GC/FID) Low Fraction mg/kg 23 7 24 6 86 2 55-109 3 84 20 L544313-01 WG563 a,a,a-Trifluorotoluene (FID)	Total Xylene	mg/kg	0 6271 -	0 695 '75	з , "	16-141 1 10	2 46	L544313-01	, WG56338
a,a,a-Trifluorotoluene(FID) 98 64 59-128 WG563  TPH (GC/FID) High Fraction ppm 67 7 116 0* 50-150 52 6* 25 L544298-02 WG563  O-Terphényl 83.78 50-150	a,a,a-Trifluorotoluene(PID)		,	9	4 03			,	WG563381
### Application   Application	TPH (GC/FID) Low Fraction	mg/kg	23 7	24 6 86	2	55-109 3		L544313-01	WG563381
o-Terphényl 83.78 50-150	a,a,a-Trifluorotoluene(FID) , '	• -		, , , 9	8 64	59-128\"		. •	WG563388
o-Terphényl 83.78 50-150	TRU (GC/FID) Wigh Fraction	<b>222</b>	67 7	116 0+		E0-1E0 55	2 6 * 2 5	T.E.4.4.2.B.O 0.2	WG563742
TPH (GC/FID) High Fraction		pp	011		2 70			1144230-02	WG563742
- Marie and	O-lerbuenyi , ,	•	•	- 8	3.18	20-120 11			MG303/42
O-Tembery) 52 90 50-150 ' ' Wasisa	TPH (GC/FID) High Fraction	ppm	41 8	46 3 69	6	50-150 10	3 25	L544425-38	WG563943
, 52 30 30-130 "M3505	o-Terphenyl		,	5	2 90	50-150 ` '	٠,	•	WG563941

Batch number /Run number / Sample number cross reference

WG563388 R1916795 L544273-01 02

WG563780 R1920893 L544273-01 02 WG563760 R1921291 L544273-01 02 \* Performance of this Analyte is outside of established criteria For additional information, please see Attachment A 'List of Analytes with QC Qualifiers '



XTO Energy - San Juan Division James McDaniel 382 County Road 3100

Aztec, NM 87410

WG563941 R1921494 L544273-01 WG563742 R1921573 L544273-02

12065 Lebanon Rd Mt Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I D 62-0814289

Est 1970

Quality Assurance Report Level II

L544273

November 07, 2011

<sup>\* \*</sup> Calculations are performed prior to rounding of reported values
\* Performance of this Analyte is outside of established criteria
For additional information, please see Attachment A 'List of Analytes with QC Qualifiers '



XTO Energy - San Juan Division James McDaniel 382 County Road 3100

Aztec, NM 87410

Quality Assurance Report Level II

1.544273

The data package includes a summary of the analytic results of the quality control samples required by the SW-846 or CWA methods. The quality control samples include a method blank, a laboratory control sample, and the matrix spike/matrix spike duplicate analysis. If a target parameter is outside the method limits, every sample that is effected is flagged with the appropriate qualifier in Appendix B of the analytic report.

Method Blank - an aliquot of reagent water carried through the entire analytic process. The method blank results indicate if any possible contamination exposure during the sample handling, digestion or extraction process, and analysis. Concentrations of target analytes above the reporting limit in the method blank are qualified with the "B" qualifier.

Laboratory Control Sample - is a sample of known concentration that is carried through the digestion/extraction and analysis process. The percent recovery, expressed as a percentage of the theoretical concentration, has statistical control limits indicating that the analytic process is "in control". If a target analyte is outside the control limits for the laboratory control sample or any other control sample, the parameter is flagged with a "J4" qualifier for all effected samples

Matrix Spike and Matrix Spike Duplicate - is two aliquots of an environmental sample that is spiked with known concentrations of target analytes. The percent recovery of the target analytes also has statistical control limits. If any recoveries that are outside the method control limits, the sample that was selected for matrix spike/matrix spike duplicate analysis is flagged with either a "J5" or a "J6". The relative percent difference (%RPD) between the matrix spike and the matrix spike duplicate recoveries is all calculated. If the RPD is above the method limit, the effected samples are flagged with a "J3" qualifier.

12065 Lebanon Rd Mt Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I D 62-0814289

Est 1970

November 07, 2011

Λ	4	Λ	Ω
-		u	О

Company Name/Address			Alternate Bil	lling				Anal	/sis/Cont	ainer/Presen	/ative		Chain of Custody
XTO ENERGY, IN 382 County Road 3100 AZTEC, NM 87410	С.									Prepared by	Pageof		
			Report to Jam	<del></del>									ONMENTAL ICE CORP ION Road
Project Description BGT Closure	FLORAN	ICE L	E-mail to Jame	es_mcdaniel@xt	tate Collected							Mt. Juliet TN Phone (615)	
PHONE 505-333-3701 FAX	Client Project I			Lab Project#								Phone (800) FAX (61	767-5859
Collected by Brad Griffith  Collected by(signature)	Site/Facility ID:	#FLURANI ab MUST b	46 C 3 -	P O # Date Results	s Needed	1						Cocode	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1
Blogger		Next Day . 「WO Day .	100% 50%	Email?No_X_Yes o		No of			Jes (2)			XTORNM Template/Prelogin	
Packed on Ice NY_\(\frac{\chi}{\chi}\)  Sample ID	Comp/Grab	hree Day Matrix	25%	FAX?No	Time	Cntrs	80.15	8021	Chloride			Shipped Via Fed Ex	Sample # (lab only)
21 BBL BGT	COMP	SS	Depth	10/28	757	1	×	X	X			Remarks/contaminant	S14273 61
95 BBL BGT	COMP	ss		10/28	759	1	X	X	X				学文型 5 型 0 Z
	<del> </del>					<del> </del>							
			<u> </u>	-		┼	1000	***					
-	<del> </del>			<del> </del>		+							
													<b>多独思性和</b>
				<del> </del>		-							
Matrix SS-Soil/Solid GW-Groundw	rater \MM-\M/	estewater (	)W-Drinking \	Water OT-O	ther		E. T	7	\$35.50°		pH_	Temp	<b>建心物性,被导流是影响的</b> 25
Remarks "ONLY 1 COC Per Site		asicwater t	JVV-Dillikilig (	vvaler 01-01							pi (	Flow	Other
Religensher by (Signature	Date	7ime 0925 Time	Received by (						urned via	FedEx UPS		Condition	(lab use only)
Relinquisher by (Signature			Received by		72,71		lem T		3.19	2 Bothes He	celypt 07		
Relinquisher by (Signature	Date	Time	Received for	tab by: (Signature			Date			Пте 0 9с	n, 11	pH Checked	



# **EPA METHOD 418.1** TOTAL PETROLEUM HYDROCARBONS

Client:	XTO	Project #:	98031-0528
Sample ID:	21 BBL BGT	Date Reported:	10/28/11
Laboratory Number:	60132	Date Sampled:	10/28/11
Chain of Custody No:	12837	Date Received:	10/28/11
Sample Matrix:	Soil	Date Extracted:	10/28/11
Preservative:	Cool	Date Analyzed:	10/28/11
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

**Total Petroleum Hydrocarbons** 

72.0

7.2

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Florance LS #4

Review



# EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	XTO	Project #:	98031-0528
Sample iD:	95 BBL BGT	Date Reported:	10/28/11
Laboratory Number:	60133	Date Sampled:	10/28/11
Chain of Custody No:	12837	Date Received:	10/28/11
Sample Matrix:	Soil	Date Extracted:	10/28/11
Preservative:	Cool	Date Analyzed:	10/28/11
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/k <b>g</b> )	(mg/kg)

**Total Petroleum Hydrocarbons** 

1,380

7.2

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Florance LS #4

Review

5796 US Highway 64, Farmington, NM 87401

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc.com envirotech-inc.com



## **EPA METHOD 418.1** TOTAL PETROLEUM HYDROCARBONS **QUALITY ASSURANCE REPORT**

Client:

QA/QC

Project #:

N/A

Sample ID:

**QA/QC** 

Date Reported: Date Sampled:

10/28/11 N/A

Laboratory Number: Sample Matrix:

10-28-TPH.QA/QC 60132 Freon-113

10/28/11

Date Analyzed:

10/28/11

Preservative:

N/A

Date Extracted:

10/28/11

Condition:

N/A

Analysis Needed:

**TPH** 

Calibration : 1-Cal Date

10/18/2011

1,800

1,720

L'Cal'RE C-Cal'RE % Difference Accept Range

4.4%

+/- 10%

Blank Conc (mg/Kg)

**TPH** 

**TPH** 

Concentration ND

7.2

Detection Limit

Duplicate Conc. (mg/Kg)

**TPH** 

Sample 72.0

64.8

Difference 10.0%

+/- 30%

Spike Conc. (mg/Kg)

Sample 72.0

2,000

1,870

90.3%

80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

QA/QC for Samples 60132 and 60133.

Review

# CHAIN OF CUSTODY RECORD

12837

Client	<del></del>		Project Name /	Location					T					A . I A I									
OTX			FLORAN	CE	LS	#4								ANAL	.1515	/ PAH	AIVIE	TERS					
Client Address:			Sampler Name.						<u>(2</u> )	23)	6						Τ						Γ
387 7080 3 Client Phone No.: 04	100		BRAO	GZ	IFF IT	+			801	98 8	826	8	_					j					
Client Phone No.:	MES		Client No.:	ent No.:			J g	‡ j	poq	leta	je	İ	😤		=	ш				8	tact		
787-05	19		9803	1-05	128				Met	₩	Meti	8	Ā.		wif.		418	GIF.				ۆ ق	e II
Sample No./	Sample	Sampl	Lab No.	S	ample	No./Volume of			(Method 8015)	BTEX (Method 8021)	VOC (Method 8260)	RCRA 8 Metals	Cation / Anion	꼾	TCLP with H/P	PAH	TPH (418.1)	CHLORIDE				Sample Cool	Sample Intact
Identification	Date	Time		<del> </del>	Matrix Sludge	Ontainers	S Ingu		<del>  -</del>	<u> </u>	>	<u> </u>	0	<u> </u>	F	a	-	0				,	Ŝ
ZI BBL BGT	10/28	075	+ (00132	Solid	Aqueous	402											X					X	Y
21 BBL BGT 95 BBL BGT	inha	1750	[133	Solid	Sludge Aqueous	1 400											X					X	/
13 1306 1361	10/28	0121	16000	Soil Solid	Sludge Aqueous	704																	
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
				Soil Solid	Sludge Aqueous																		
Relinquished by: (Signa					Date	Time	F	Recei	ed by:	(Sign	ature)		` ,							(	ate	(	me
BL 6 / Relinquished by (Signal	M				10/28	0905			M			VI	ML	M	$\mathbb{X}$					10-	29	9:	US
Relinquished by (Signa	ature)						F	Recei	ed by:	(Sign	ature)	1											
Relinquished by: (Signa	ature)						F	Receiv	ed by:	(Sign	ature)	- <del>*</del>							<del></del>				
						en			) t										<u></u>	l		L	

5796 US Highway 64 • Farmington, NM 87401 • 505-632-0615 • lab@envirotech-inc.com



#### James McDaniel /FAR/CTOC 12/30/2011 03 30 PM

To brandon.powell@state.nm.us

cc Thomas Dawes/FAR/CTOC@CTOC

bcc

Subject Johnson Gas COM B #1E BGT Closure

Brandon,

Please accept this email as the required notification for BGT closure activities at the following two well sites:

Johnson Gas COM B #1E (api #30-045-24166) located in Unit I, Section 21, Township 27N, Range 10W, San Juan County, New Mexico.

Florance LS #4 (api #30-045-06472) located in Unit K, Section 18, Township 27N, Range 8W, San Juan County, New Mexico

Both of these below grade tanks are being closed due to plugging and abandoning of these well locations. Thank you for your time in regards to this matter.



James McDaniel, CHMM #15676
EH&S Supervisor
XTO Energy, Inc.
omice #505-333-3701
ceil #505-787-0519
James Mcdanlet@xtoenergy.com



# James McDaniel /FAR/CTOC

12/30/2011 03:35 PM

To Mark\_Kelly@blm.gov

CC

bcc

Subject BGT Closure Notifications

Mark,

Please accept this email as the required notification for BGT closure activities at the following two well sites:

Johnson Gas COM B #1E (api #30-045-24166) located in Unit I, Section 21, Township 27N, Range 10W, San Juan County, New Mexico.

Florance LS #4 (api #30-045-06472) located in Unit K, Section 18, Township 27N, Range 8W, San Juan County, New Mexico

Both of these below grade tanks are being closed due to plugging and abandoning of these well locations. Thank you for your time in regards to this matter.



James McDaniel, CHMM #15676 EH&S Supervisor

XTO Energy, Inc. Office # 505-333-3701 Cell # 505-787-0519

James Mcdanlel@xtoenergy.com

#### Jones, Brad A., EMNRD

From: Sent: James\_McDaniel@xtoenergy.com Thursday, October 27, 2011 12:18 PM

To: Subject: Jones, Brad A., EMNRD Florance LS #4 BGT Closure

James\_Mcdanlel@xtoenergy.com

#### Brad,

Please accept this email as a request for approval of the closure plan only for the BGT at the Florance LS #4 location (api #30-045-06472) located in Unit K, Section 18, Township 27N, Range 8W, San Juan County, New Mexico. Our records show that this closure plan was submitted to your office on 2/27/2009. This BGT is being closed due to the plugging and abandoning of this well location. Thank you for your time in regards to this matter.



James McDaniel, CHMM #15676 EH&S Supervisor XTO Energy, Inc. Office # 505-333-3701 Cell # 505-787-0519

## XTO Energy, Inc. Florance LS #4 Section 18, Township 27N, Range 8W Closure Date: 1/9/2012



Photo 1: Florance LS #4 after reclamation (View 1)

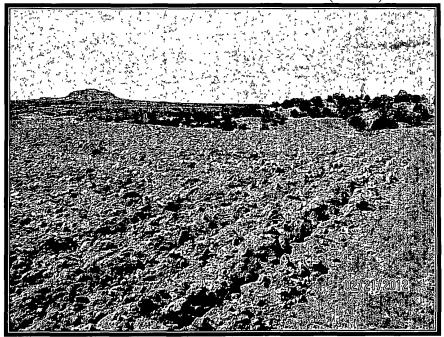


Photo 2: Florance LS #4 after reclamation (View 2)



# Well Below Tank Inspection Report

	ms (Temp ) Inspection 07/23/2008	Florans LS Inspection 10 30	04 Visible No	Thompson Ronnie VisibleTankLeak No	Unassigned Collection Yes	FLORAN Visible Yes	CE 04 (PA Vısıble No	Freeboard 3	3004506472 PitLocation	PitType	18 Notes	8W	27N
L Parke	08/20/2008	10 55	No	No	Yes	Yes	No	3					
MIKE G	09/17/2008	10 25	No	No	Yes	Yes	No	3					
LPARKE	10/30/2008	11 45	No	No	Yes	Yes	No	3	Well Water F	Below G	round		
LPARKE	12/31/2008	11 00	No	No	Yes	Yes	No	3	Well Water F	Below G	round		
LPARKE	01/17/2009	11 00	No	No	Yes	Yes	No	3	Well Water F	Below G	round		
LPARKE	02/21/2009	11 00	No	No	Yes	Yes	No	3	Well Water F	Below G	round		
M .GARCIA	04/30/2009	02 00	No	No	Yes	Yes	No	4	Well Water F	Below G	round		
LP	06/03/2009	02 00	No	No	Yes	Yes	No	4	Well Water F	Below G	round		
LP	01/19/2010	02 00	No	No	Yes	Yes	No	3	Well Water P	Below G	round		
LP	02/27/2010	02 00	No	No	Yes	Yes	No	2	Well Water F	Below G	round		
MG	03/25/2010	02 00	No	No	Yes	Yes	No	2	Well Water P	Below G	MG		
MG	05/20/2010	02 00	No	No	Yes	Yes	No	2	Well Water P	Below G	MG		
LR	08/31/2010	02 00	No	No	Yes	Yes	No	5	Well Water F	Below G	LR-WELL INA	8-18-10	
MG	10/13/2010	02 30	No	No	Yes	Yes	No	5	Well Water F	Below G	LR-WELL INA	8-18-10	
	02/28/2011 09/06/2011	02 30 11 20	No No	No No	Yes Yes	Yes Yes	No No	5 5	Well Water F Well Water F		LR-WELL INA	8-18-10	