District I
1625 N. French Dr., Hobbs. NM 88240
District II
1301 W Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec. NM 87410
District IV
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St Francis Dr

Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks. submit to the appropriate NMOCD District Office
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

1596	7
\	

<u>Pit, Closed-Loop System, Below-Grade Tank, or</u> <u>Proposed Alternative Method Permit or Closure Plan Application</u>

Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method			
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request			
Please be advised that approval of this request does not relieve the operator of hability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances			
Operator: DJ Simmons, Inc OGRID# 005578			
Address: 1009 Ridgeway Place Farmington, NM 87410			
Facility or well name: Simmons S-1A			
API Number: 30-045232170000 OCD Permit Number			
U/L or Qtr/Qtr P Section 25 Township 29N Range 9W County: San Juan			
Center of Proposed Design: Latitude <u>36 692540</u> Longitude <u>-107 728297</u> NAD: ☐1927 ☑ 1983			
Surface Owner: Federal State Private Tribal Trust or Indian Allotment			
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Lined ☐ Unlined Liner type Thickness			
Closed-loop System: Subsection H of 19.15 17 11 NMAC Type of Operation			
Below-grade tank: Subsection I of 19.15 17.11 NMAC Volume: 210			
s. Alternative Method: Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval			

Fencing: Subsection D of 19.15.17 11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital,	
7. Netting: Subsection E of 19.15 17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen □ Netting □ Other □ Monthly inspections (If netting or screening is not physically feasible)		
Signs: Subsection C of 19 15 17 11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.3 103 NMAC	,	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s). Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions. The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells	☐ Yes 🖾 No	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA	
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No	
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No	
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No	
Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources, USGS; NM Geological Society; Topographic map	☐ Yes ☑ No	
Within a 100-year floodplain FEMA map	☐ Yes ☑ No	

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15.17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are			
attached. ☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17.9 NMAC ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17 9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC			
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19.15 17 13 NMAC			
Previously Approved Design (attach copy of design) API Number: 30-045232170000 or Permit Number:			
12 Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.			
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC			
Previously Approved Design (attach copy of design) API Number:			
Previously Approved Operating and Maintenance Plan API Number. (Applies only to closed-loop system that use			
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)			
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Limer Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC			
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: □ Drilling □ Workover □ Emergency □ Cavitation □ P&A □ Permanent Pit ☑ Below-grade Tank □ Closed-loop System □ Alternative Proposed Closure Method: ☑ Waste Excavation and Removal □ Waste Removal (Closed-loop systems only) □ On-site Closure Method (Only for temporary pits and closed-loop systems) □ In-place Burial □ On-site Trench Burial □ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)			
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15.17 13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC			

16.			
<u>Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:</u> (19.15.17.13 I Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.			
Disposal Facility Name: Disposal Facility Permit Number:			
Disposal Facility Name. Disposal Facility Permit Number.			
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future ser Yes (If yes, please provide the information below) No	vice and operations?		
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19 15.17 13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17 13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC			
Siting Criteria (regarding on-site closure methods only): 19.15 17.10 NMAC Instructions. Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.			
Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells	☐ Yes ☐ No ☐ NA		
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA		
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No		
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application NM Office of the State Engineer - iWATERS database. Visual inspection (certification) of the proposed site	☐ Yes ☐ No		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality	☐ Yes ☐ No		
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map, Visual inspection (certification) of the proposed site	☐ Yes ☐ No		
Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No		
Within an unstable area - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No		
Within a 100-year floodplain - FEMA map	Yes No		
18. On-Site Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of the following items must be attached to the closure p. by a check mark in the box, that the documents are attached. □ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17 10 NMAC □ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15 17 13 NMAC □ Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15 17.11 NMAC □ Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15 17.13 NMAC			

_				
	Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC			
	Operator Application Certification:			
	I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief			
	Name (Print). <u>John Byrom</u> Title <u>President</u>			
-				
	Signature			
l	e-mail address jbyrom@djsmmons.com Telephone 505-326-3753			
l				
	no. OCD Approval: ⊠ Permit Application (including dostre plan)/⊠, Closure Plan (only) ☐ OCD Conditions (see attachment)			
	OCD Representative Signature:Approval Date:Approval Date:			
	OCD Representative Signature: Approval Date: 3/09/2012 Title: OCD Permit Number:			
Ŋ	Title: Comp l'ance Office OCD Permit Number:			
, - 	11.			
	Closure Report (required within 60 days of closure completion): Subsection K of 19.15 17 13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.			
	☐ Closure Completion Date:			
į	12. Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain			
	13. Closure Penert Peggerding Waste Pemeral Closure For Closed Ican Systems That Utilize Above Cround Steel Tentre or Haul off Rins Only			
	Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.			
	Disposal Facility Name: Disposal Facility Permit Number:			
	Disposal Facility Name: Disposal Facility Permit Number:			
	Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) \(\subseteq \text{No} \)			
	Described for impacted areas which will not be used for future sources and energians			
	Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation)			
	Soil Backfilling and Cover Installation			
	☐ Re-vegetation Application Rates and Seeding Technique			
Ī	ы.			
- {	Closure Report Attachment Checklist: Instructions. Each of the following items must be attached to the closure report. Please indicate, by a check			
	mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)			
	Proof of Deed Notice (surface owner and division) Proof of Deed Notice (required for on-site closure)			
	Plot Plan (for on-site closures and temporary pits)			
ĺ	Confirmation Sampling Analytical Results (if applicable)			
	☐ Waste Material Sampling Analytical Results (required for on-site closure) ☐ Disposal Facility Name and Permit Number			
	☐ Disposal Facility Name and Permit Number ☐ Soil Backfilling and Cover Installation			
	Re-vegetation Application Rates and Seeding Technique			
ļ	Site Reclamation (Photo Documentation)			
- 1	On alta Clasura Lagatian Latituda Lagatian Lagatian Latituda Lagatian Lagatian NAD: 1027 1023			

It Note test result limit correction in Closure Plan

Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure repobelief. I also certify that the closure complies with all applicable closure requirement	
Name (Print)	Title
Signature:	Date:
e-mail address:	Telephone

Hydrogeologic Report DJ Simmons, Inc Simmons S-1A T29N, R9W, Sec. 25 Regional Hydrological Context

Referenced Well Location:

The referenced well and pit is located on Federal Bureau of Land Management land in San Juan County, New Mexico. This site is positioned in the northeastern portion of the San Juan Basin, an asymetrical syncline that extends from northwestern New Mexico into southwestern Colorado (Carson National Forest DEIS, 2007). Elevation of the referenced well is approximately 5994 feet MSL

General Regional Groundwater Description:

As a portion of the San Juan Basin, this region is underlain by sandstone aquiters of the Colorado Plateau. The primary aquifer of potential concern at this location is the Unita-Animas Aquifer, composed primarily of Lower Tertiary rocks in the San Juan Basin. The aquifer consists of the San Jose Formation; the underlying Animas formation and its lateral equivalent, the Nacimiento formation; and the Ojo Alamo Sandstone. The thickness of the Unita-Animas aquifer generally increases toward the central part of the basin. In the northeastern part of the San Juan Basin, the maximum thickness of the aquifer is approximately 3500 feet (USGS, 2001). This aquifer contains fresh to moderately saline water.

Groundwater generally flows toward the San Juan River and it tributaries, where it becomes alluvial groundwater or is discharged to stream flow. Additional information regarding the Hydrogeologic setting can be found in the provided references.

Site Specific Information:

Surface Hydrology: The site location and BGT are located on relatively even terrain

on an upland bench associated with Largo Canyon. The BGT area is 560 ft to the nearest delineated significant waterway, an ephemeral tributary drainage of Largo Canyon watershed

1st Water Bearing Formation: San Jose, Tertiary
Formation Thickness: Approximately 1,900- feet
Underlying Formation: Nacimiento, Tertiary

Depth to Groundwater: Depth to groundwater is estimated at equal to or greater than 100

feet bgs. There are no iWATERS wells within a two-mile radius of this location. The Closest Well(s) with iWATERS data are located 2.5-2.7 miles distance, they are the domestic San Juan 00005, T29N, 08W, Sec 21, has a depth to water of 406 feet bgs and the stock well San Juan 01880, T29, R8W, Sec. 18 with an

unknown depth to groundwater

References:

Allen, Erin Undated. Colorado Plateau Aquifers.

http://academic.emporia.edu/schulmem/hydro/TERM%20PROJECTS/2007/Allen/Aquifer.html

New Mexico Energy, Minerals and Natural Resources Department, Division of Mining and Minerals. Database. 2008. Internet accessed August 2008

New Mexico Office of the State Engineer. August 2008. iWaters database. Internet accessed August 2008

New Mexico WQCC. 2005. State of New Mexico Water Quality Act and the Water Control Commission Regulations

United States Department of Agriculture, Forest Service. 2007. Draft Environmental Impact Statement for Surface Management of Gas Leasing and Development. Jicarilla Ranger District, Carson National Forest, Rio Arriba County, New Mexico.

United States Department of the Interior. Bureau of Land Management. 2003 Final Farmington Resource Management Plan and Final Environmental Impact Statement Farmington Field Office, Farmington, New Mexico

United States Geological Survey. 2001. Groundwater Atlas of the United States. Arizona, Colorado, New Mexico and Utah. USGS Publication HA 730-C. http://capp.water.usgs.gov

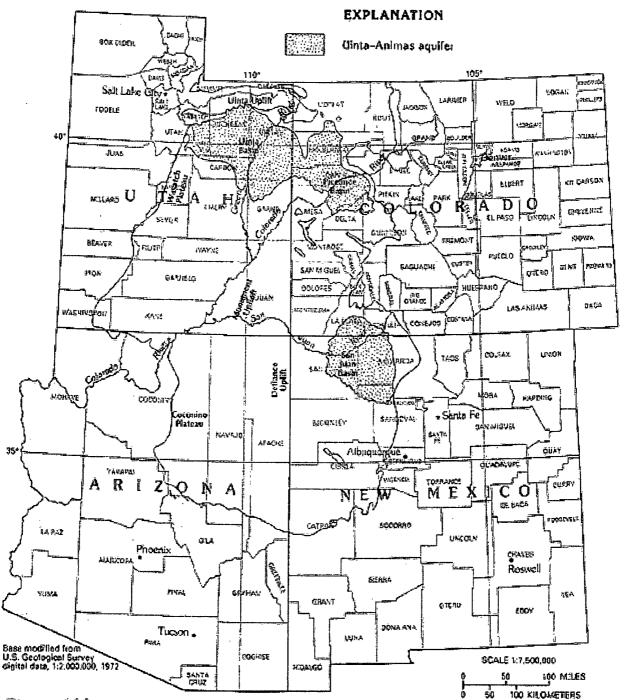


Figure 108. The Uinta-Animas aquifer is the shallowest of the Colorado Plateaus aquifers and is present in the Uinta, Piceance, and San Juan Basins.

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 29N Range: 09W Sections: 26,25,24,13,16,12,11,33,21			
NAD27 X: Y: Zone: Search Radius:			
County: Basin: SJ(San Juan) Number: Suffix:			
Owner Name: (First) (Last) Non-Domestic			

POD / Surface Data ReportAvg Depth to Water ReportWater Column Report

POD / SURFACE DATA REPORT


09/14/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)
(acre ft per annum)


	•	•			
(quarters are b	iggest to	smallest X Y a	are in Feet		UTM are in
Meters)	Start	Finish	Depth Dept	h (in	feet)
DB File Nbr	Use Div	ersion Owner			POD
Number	Source	Tws Rng Sec q	qq Zone	х	Y
UTM_Zone Easti	ng Northi	ng Date	Date	Well	Water
SJ 02883	DOM	3 KENNETH	W. JOINER		SJ
02883	Shallow	29N 09W 16 2	3 3		_
13 251496	4068078	07/20/1998 07,	/31/1998	123	87
SJ 03185	DOM	3 MARCIA 1	MAGEE		SJ
03185	Shallow	29N 09W 16 3	4 4		_
13 251290	4067283	05/28/2002 06	/01/2002	220	100

Record Count: 2

New Mexico Office of the State Engineer POD Reports and Downloads

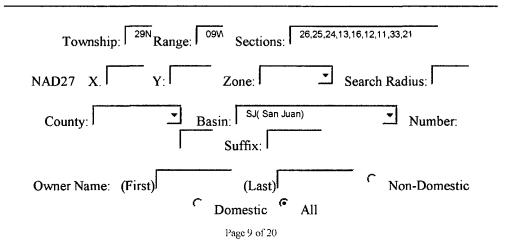

AVERAGE DEPTH OF WATER REPORT 09/14/2008 (Depth Water in Feet) Bsn Rng Sec X Wells Min Max Avg 09W 16 SJ 29N 100 2 87 94 Record Count: 2 New Mexico Office of the State Engineer **POD Reports and Downloads** 26,25,24,13,16,12,11,33,21 Sections:

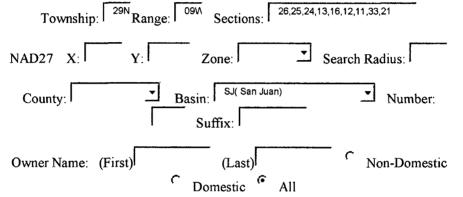


POD / Surface Data ReportAvg Depth to Water ReportWater Column Report


WATER COLUMN REPORT 09/14/2008

(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Water (in feet) Depth POD Number Rng Sec q q q Zone x Well Water Column SJ 02883 09W 16 2 3 3 123 29N 87 <u>SJ 03</u>185 29N 09W 16 3 4 4 220 100 120


Record Count: 2

Siting Criteria Map I Existing Known Water Wells and Springs DJ Simmons, Inc Simmons S-1A T29N, R09W, Section 25, NMPM San Juan County, New Mexico

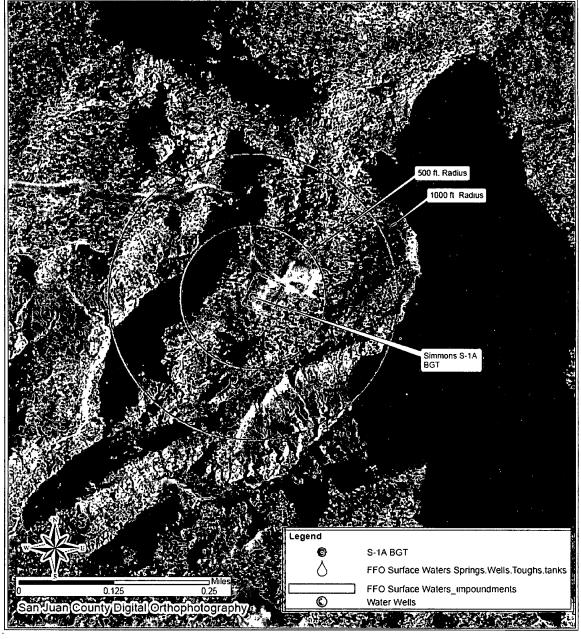

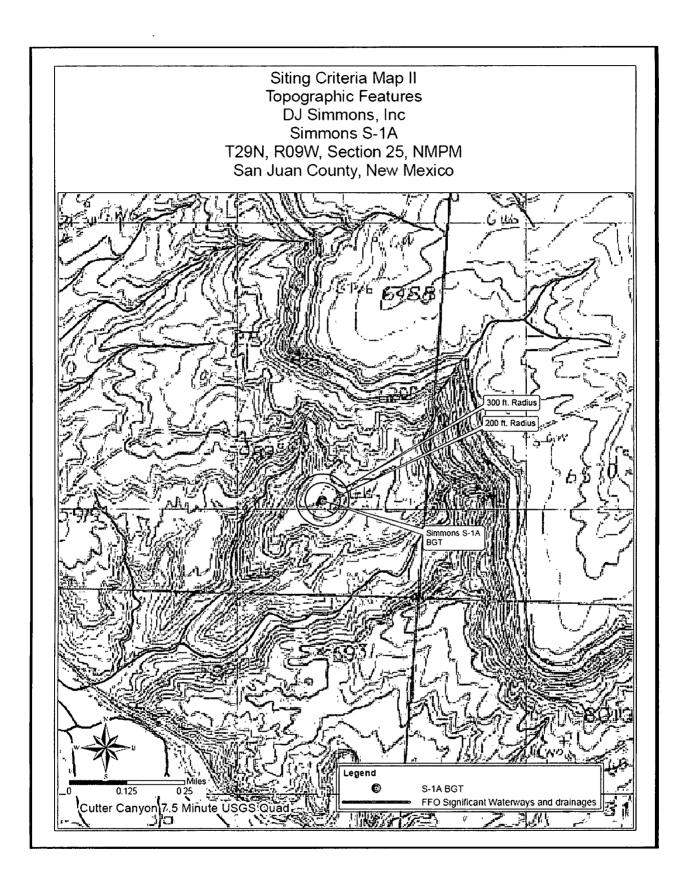

Simmons S-1A Mines, Mills and Quarries Web Vicinity Map

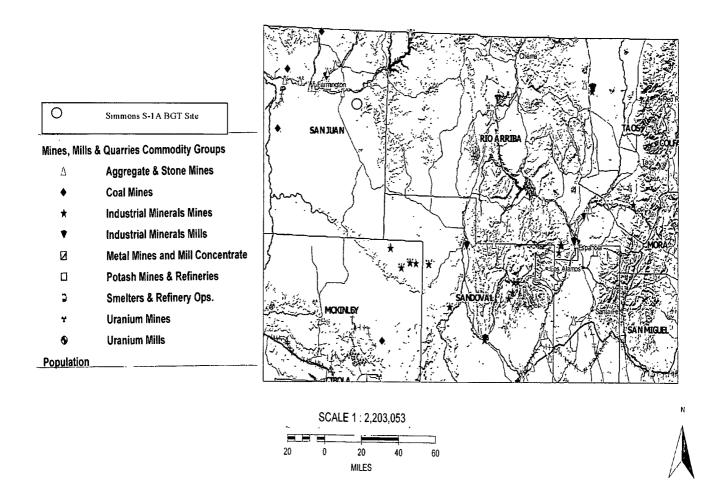



Siting Criteria Compliance Demonstrations:

The Simmons S No. 1A well and BGT are not located in an unstable area. The location is not situated over a mine or a steep slope. The Below Grade Tank (BGT) is not located within 300 feet of a continuously flowing water course or within 200 feet of any other significant water course, lakebed, sinkhole, or playa lake (see Siting Compliance Map II). The site is not within 500 feet of a delineated and reported riparian area or wetland (see attached USFWS Wetland Map). The Below Grade Tank (BGT) is not within 500 feet of any private, domestic fresh water well or spring; or within 1000 feet of any other fresh water well or spring (see Siting Compliance Map I). The BGT is not within any incorporated municipal boundaries or defined municipal freshwater well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The location of the existing BGT is not within 300 feet of any permanent residence, school, hospital, institution, or church

FEMA Map - 100-Year Floodplain:

According to FEMA records, this site is not located in a 100-year floodplain (see attached FEMA map on the following page)

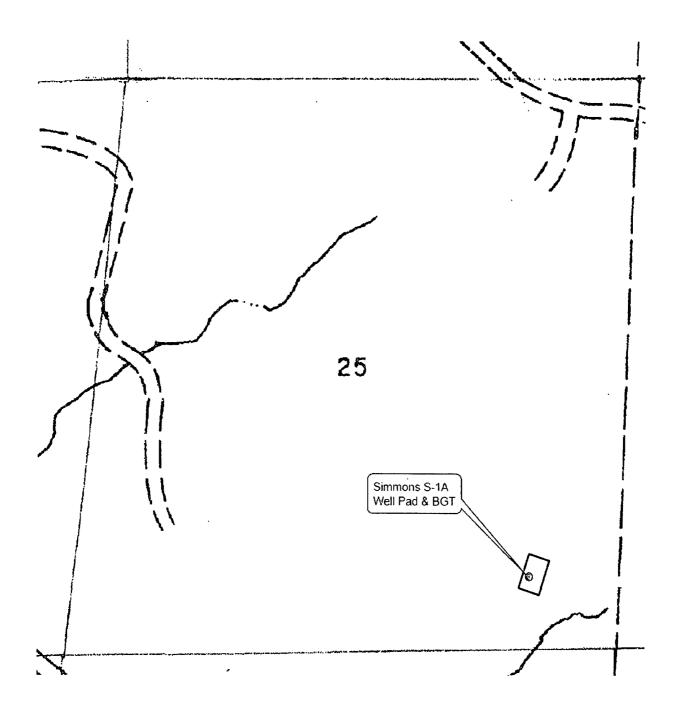

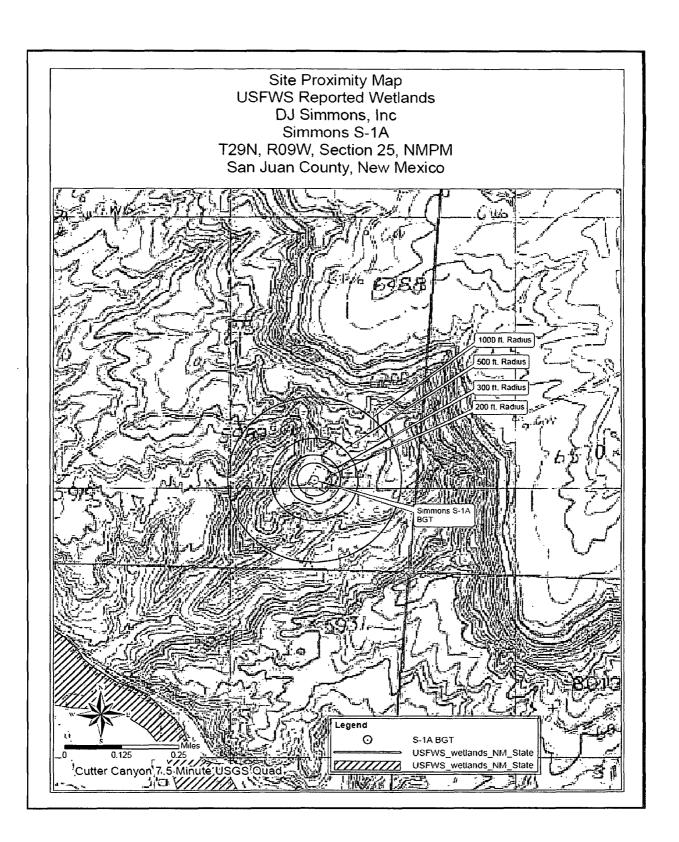

DJ Simmons, Inc

San Juan Basin Below Grade Tank and Sump Operating and Maintenance Plan

In Accordance wit Rule 19 15 17, the following information describes the general operation and maintenance (O&M) of Below Ground Tanks (BGT) and Sumps on DJ Simmons, Inc (DJ Simmons) locations in the San Juan Basin of New Mexico. This is DJ Simmons standard operating and maintenance procedure for BGTs and Sumps. A Separate plan would be submitted and implemented for any BGT or sump which does not conform to DJ Simmons standard plan outlined hereafter pursuant to 19 15 17 11 Subsection I and 19 15 17 12 Subsection D.

General Operating and Maintenance:

- 1 DJ Simmons will operate and maintain a BGT to contain liquids and solids and would maintain the integrity of the liner, prevent contamination of fresh water and protect public health and the environment
- 2 DJ Simmons shall not store or discharge into any hazardous waste in the below ground tank or sump
- 3 DJ Simmons shall not allow a below grade tank to overflow or allow surface run-on to enter the below grade tank
- 4 DJ Simmons shall continuously remove any visible or measurable layer of oil from the fluid surface of a below grade tank in an effort to prevent significant accumulation of oil overtime
- 5 DJ Simmons shall inspect the below grade tank at least monthly, assessing tank and sump integrity, and would maintain a cumulative written record of each inspection for five years
- 6 DJ Simmons shall maintain adequate freeboard to prevent overtopping of the below grade tank
- If any DJ Simmons BGT, Sump or BGT liner's integrity is compromised, or if any penetration of the liner occurs or if penetration of the tank occurs above the liquid's surface, DJ Simmons shall repair the damage or replace the liner or tank as necessary. DJ Simmons will notify the NMOCD Aztec District Office by phone or email within 48-hours of discovery. Any leakage below the liquid's surface, DJ Simmons shall suspend operations, remove all liquids above the damaged tank area within 48 hours, and repair the damage or replace the tank. DJ Simmons will notify and report to NMOCD.
- 8 DJ Simmons shall visually inspect a sump's integrity annually and promptly repair or replace a sump that fails the inspections
- 9 DJ Simmons shall maintain records of sump inspection and make the records available for the appropriate division district offices review upon request

DG Simmons, Inc San Juan Basin Below Grade Tank Closure Plan

In Accordance with Rule 19 15 17 12 NMAC the following information describes the closure requirements of Below Grad Tanks (BGTs) on DJ Simmons. Inc locations, hereinafter known as DJ Simmons locations, in the San Juan Basin of New Mexico. This is DJ Simmons's standard procedure for all BGTs. A separate plan would be submitted and utilized for any BGT which does not conform to this plan.

All closure activities will include proper documentation as stipulated by 19 15 17 NMAC and will be submitted to OCD within 60 days of the closure on a Closure Report using Division Form C-144 The Report will include the following

- Details on Capping and Covering, where applicable
- Plot Plan (Pit Diagram)
- Inspection reports
- Sampling Results

Copy of Deed Notice filed with the County Clerk (format to meet County requirements)

General Requirements

- 1 DJ Simmons shall close a below-grad tank within the time periods provided in 1915 1713 NMAC, or by an earlier date that, if the division requires due to any imminent danger to fresh water, public health or the environment
- 2 DJ Simmons shall close an existing below grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19 15 17 11 NMAC or is not included in Paragraphs (5) of Subsection I of 19 15 17 11 NMAC within five years after 16 June 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19 15 17 11 NMAC
- 3 DJ Simmons shall close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19 15 17 17 NMAC in accordance with a closure plan that the appropriate division district office approves The closure report would be filed on a C-144 form
- 4 DJ Simmons shall remove all free standing liquids and sludge from a below grade tank prior to implementation of a closure method. Liquids will be removed in a manner that the appropriate District Office approves including, recycled, reused, reclaimed, evaporated, and/or disposed of in a Division-approved facility.
- 5 DJ Simmons shall remove the below-grade tank and dispose of it at a heensed disposal facility (probably San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426) and/or recycled, reused, or reclaimed in a manner that the appropriate division district office approves
- 6 If there is any on-site equipment associated with a below grade tank, DJ Simmons shall remove the equipment, unless the equipment is required for some other purpose(s)
- DJ Simmons shall test the soils beneath the below-grad tank to determine whether a release has occurred DJ Simmons shall collect, at a minimum, a five point, composite sample. The samples would be taken of the affected area using sampling tools and all samples tested per 19.15.17.13(B)(1)(b) NMAC. In the event that the criteria are not met (See Table 1), all contents will be handled per 19.15.17.13(B)(1)(a) (i.e. dig and haul to a Division-approved facility). Approval to haul will be requested of the Aztec District office prior to initiation. Collected samples would include undividual grab samples from any area that is wet, discolored or showing other evidence of a release, and analyze samples for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA methodology that the division approves, does not exceed 50mg/kg, the TPH concentration, as

determined by the EPA method 418 1 or other EPA methodology that the division approves, does no exceed 100~mg/kg and the chloride concentration , as determined by the EPA method 300~1~or other EPA methodology that the division approves, does not exceed 250~mg/kg, or the background concentration, which may be greater DJ Simmons shall notify the division of its results on form C-141

Table 1 Closure Criteria for Below Grade Tanks

Components	Testing Methods	Closure Limits (mg/kg)			
Benzene	EPA SW-846 Wethod 8021B or 8260B	02			
BTEX	EPA SW-846 Method 8021B or 8286	50			
TPH	EPA SW-846 Method 8015 M(Full Range)* or	2500			
	Method 4181				
GRO/DRO	EPA SW-846 Method 8015M (GRO/DRO)	500			
Chiorides	EPA SW-846 Method 300 I	1000			

* Preferred method

See above text for correct test result limits

- 8 If DJ Simmons or the division determines that a release has occurred, DJ Simmons shall comply with 19 15 17 116 NMAC and 19 15 1 19 NMAC stipulations as appropriate
- 9 If contamination is confirmed by field sampling. DJ Simmons will follow the *Guidelines For Remediation Of Leaks*, Spills, and Releases per NMOCD August 1993 mandate, when remediating identified contaminants
- 10 IF the sampling program demonstrates that a release has occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19 15 17 13 NMAC, then DJ Simmons shall backfill the excavation with compacted, non-waste containing, earther material construct a division prescribed soil cover re-contour and re-vegetate the site.
- 11 Notice of Closure will be given to the Aztec Division office between 72 and 7 days (one Week) of the closure via e-email, or verbally The notification of closure will include the following
 - Operator's name (DJ Simmons)
 - 11 Well Name and API Number
 - 111 Location (USTR)
- 12 All closure activities will include proper documentation and be available for review per request and will be submitted to OCD within 60 days of closure of the below grade tank. The closure report will be filed on a C-144 form and incorporate the following
 - Details on Capping and Covering, where applicable
 - Inspection reports
 - ui Sampling Results
- 13 Re-contouring of the location would match the original geographic features and topographic fit, lines, form, shape and texture of the surrounding topographical contours Re-shaping of the contour would include establishment or reestablishment of drainages to control sedimentation, total dissolved solids (TDS), and to mitigate ponding and prevent crosson. Natural drainages will be unimpeded and appropriate hydrologic BMPs such as water bars and/or silt traps will be placed in areas where needed to prevent crosson and sediment movement on a large scale. The final recontour shall have a uniform appearance with smooth surface, fitting the aesthetic of the surrounding natural landscape.
- 14 DJ Simmons shall seed the disturbed areas within the first growing season after the operator has closed the pit. Seeding will be accomplished via drill on the contour whenever possible or by other division approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: DJ Simmons assumes the seeding stipulations including mix and seeding methods specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) or Land owner as part of a surface use agreement or APD are Division-approved methods unless notified by the Division of

- their unacceptability The Operator would be responsible for monitoring vegetative stand development and for cradicating all noxious/invasive weeds within the re-vegetated area
- 15 A Minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil whichever maybe greater
- 16 The surface owner shall be notified of DJ Simmons's proposed below-grade tank closure plan using a means that provides proof of notice (i.e. certified mail/return receipt requested)