

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
OMB No 1004-0136
Expires January 31, 2004

APPLICATION FOR PERMIT TO DRILL OR REENTER FEB 01 2012

1a Type of Work ☒ DRILL ☐ REENTER		Farmington Field Office Bureau of Land Management		5 Lease Serial No NMNM023044
1b Type of Well ☐ Oil Well ☒ Gas Well ☐ Other ☐ Single Zone ☐ Multiple Zone				6 If Indian, Allottee or Tribe Name
2 Name of Operator WPX Energy Production, LLC (FKA) Williams Production Company, LLC				7 If Unit or CA Agreement, Name and No
3a Address P O Box 640 Aztec, NM 87410		3b Phone No (include area code) (505) 333-1808		8 Lease Name and Well No Schalk 32 #2B
4 Location of Well (Report location clearly and in accordance with any State requirements *) At surface N 635' FSL & 2000' FWL At proposed prod zone I 2066' FSL & 50' FEL				9 API Well No 30-039-31107
14 Distance in miles and direction from nearest town or post office* approximately 31 miles northeast of Blanco, New Mexico				10 Field and Pool, or Exploratory Basin Fruitland Coal
15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drg unit line, if any) 635'				11 Sec, T, R, M, or Blk and Survey or Area Section 32, 31N, 4W
16 No of Acres in lease 640.0				12 County or Parish Rio Arriba
17 Spacing Unit dedicated to this well 320.0 - (S/2)				13 State NM
18 Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft 50'				20 BLM/BIA Bond No on file UTB000178
19 Proposed Depth 7071'				21 Estimated duration 1 month
22 Approximate date work will start* April 1, 2012				23 Estimated duration 1 month
24 Attachments This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4				25 Signature Larry Higgins

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, shall be attached to this form

- 1 Well plat certified by a registered surveyor
- 2 A Drilling Plan
- 3 A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office)
- 4 Bond to cover the operations unless covered by an existing bond on file (see Item 20 above)
- 5 Operator certification
- 6 Such other site specific information and/or plans as may be required by the authorized officer

25 Signature *Larry Higgins* Name (Printed/Typed) LARRY HIGGINS Date 2-1-12

PERMIT SUPRV
Approved by *[Signature]* Name (Printed/Typed) Title Office FFO Date 3/26/12

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon
Conditions of approval, if any, are attached

Title 18 U S C Section 1001 and Title 43 U S C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

*(Instructions on reverse)

WPX Energy Production, LLC. proposes to develop the Basin Fruitland Coal formation at the above described location in accordance with the attached drilling and surface use plans.

The surface is under Jurisdiction of the Carson National Forest, Jicarilla Ranger District

This location has been archaeologically surveyed by La Plata Archaeological Consultants. Copies of their report have been submitted directly to the CNF

No new access road will be required for this proposed well

This APD is also serving as an application to obtain a pipeline right-of-way. An associated pipeline tie of 34.6 feet would be required for this

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

A COMPLETE C-144 MUST BE SUBMITTED TO AND APPROVED BY THE NMOC FOR: A PIT, CLOSED LOOP SYSTEM, BELOW GRADE TANK, OR PROPOSED ALTERNATIVE METHOD, PURSUANT TO NMOC PART 19.15.17, PRIOR TO THE USE OR CONSTRUCTION OF THE ABOVE APPLICATIONS.

NMOC

APR 02 2012 ca

for Directional Survey and "As Drilled" plat

RECEIVED
BLM - MAIL ROOM
2012 MAR 28 PM 2:04
STATE OFFICE
SANTA FE, NEW MEXICO

NOTIFY AZTEC OCD 24 HRS.
PRIOR TO CASING & CEMENT

District I
1625 N. French Drive, Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number 30-039-31107		*Pool Code 71629	*Pool Name BASIN FRUITLAND COAL
*Property Code 301345	*Property Name SCHALK 32		*Well Number 2B
*GRID No. 120782	*Operator Name WILLIAMS PRODUCTION COMPANY		*Elevation 6938'

¹⁰ Surface Location

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	32	31N	4W		635	SOUTH	2000	WEST	RIO ARriba


¹¹ Bottom Hole Location If Different From Surface

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	32	31N	4W		2066	SOUTH	50	EAST	RIO ARriba

¹² Dedicated Acres 320.0 Acres - (S/2)	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16	5278.02'	2640.00'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <u>Heather Riley</u> 1/25/12 Signature Date <u>Heather Riley</u> Printed Name <u>heather.riley@wpxenergy.com</u> E-mail Address
SURFACE LOCATION LAT: 36.85065°N LONG: 107.27984°W DATUM: NAD1927 LAT: 36.85066°N LONG: 107.28044°W DATUM: NAD1983	POINT OF ENTRY LAT: 36.85110°N LONG: 107.27859°W DATUM: NAD1927 LAT: 36.85111°N LONG: 107.27919°W DATUM: NAD1983	END OF LATERAL LAT: 36.85458°N LONG: 107.26883°W DATUM: NAD1927 LAT: 36.85459°N LONG: 107.26943°W DATUM: NAD1983	18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date Revised: DECEMBER 5, 2011 Survey Date: SEPTEMBER 23, 2011 Signature and Seal of Professional Surveyor  JASON C. EDWARDS Certificate Number 15269

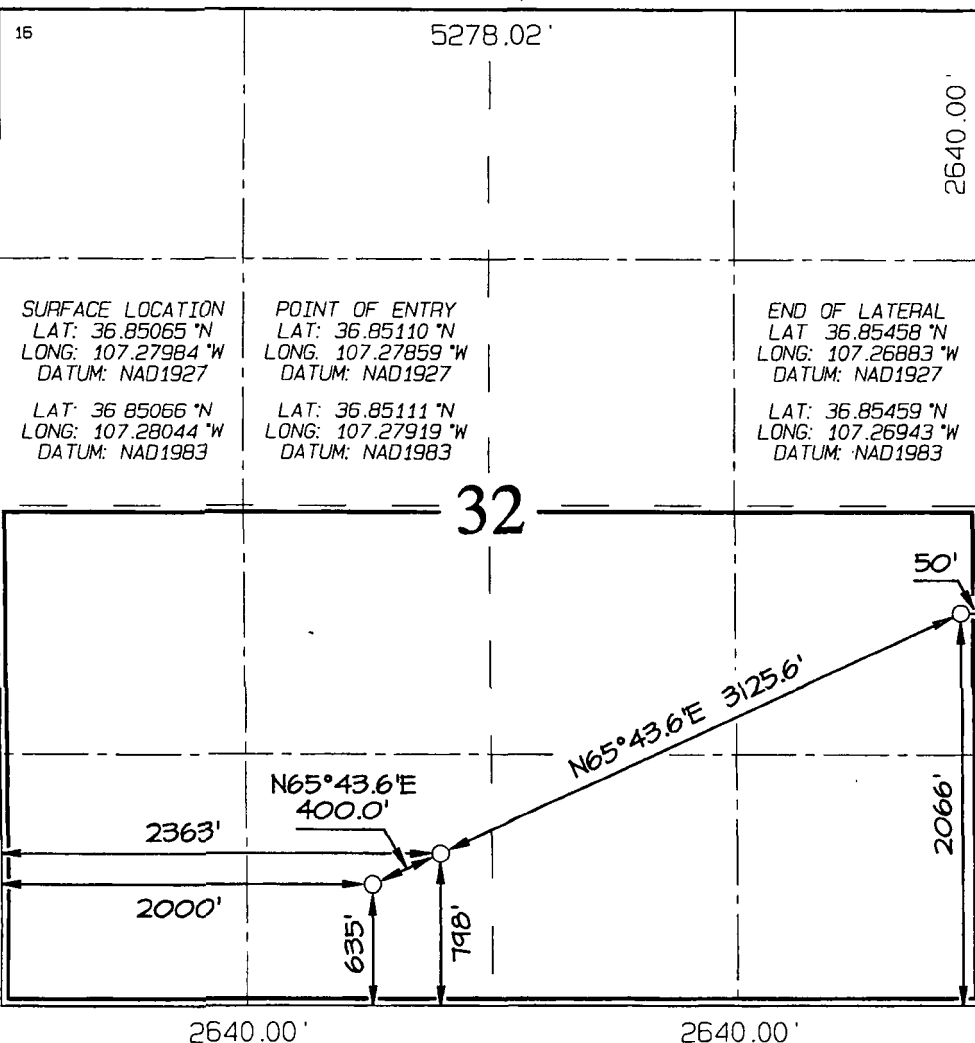

WPX Energy Production, LLC

Operations Plan

(Note: This procedure will be adjusted on site based upon actual conditions)

DATE: 12/08/2011

WELLNAME: Schalk #32-2B **FIELD:** Basin Fruitland Coal

BH LOCATION: SESW Sec. 32-T31N-4W
Rio Arriba, NM **SURFACE:** USFS

ELEVATION: 6,938' GR **MINERALS:** Federal WOC 12 hours.
Test csg to 600psi.

TOTAL DEPTH: 7,071 **LEASE #** NM-23044

I. GEOLOGY: Surface formation - San Jose

A. FORMATION TOPS: (KB)

NAME	TVD	MD	NAME	TVD	MD
San Jose	Surface	Surface	Top Target Coal	3,739	3,990
Nacimiento	2,111	2,111	Bottom Target Coal	3,755	
Ojo Alamo	3,161	3,161	Base Coal	3,771	
Kirtland	3,276	3,276	Picture Cliffs	3,770	
Fruitland	3,531	3,540	TD	3,743	7,071

- **NOTE:** Well will be vertically drilled to 100' into Pictured Cliffs, logged through the PC, 7" csg will be run with shoe 100' into Pictured Cliffs. Cased hole whipstock will be set at KOP (+/-441') above top of target coal). Well will be geosteered in lateral.
- B. LOGGING PROGRAM:** HRI/SDL/DSN from pilot hole TD to surface csg. MWD Gamma Ray in curve and lateral.
- C. NATURAL GAUGES:** Gauge any noticeable increases in gas flow. Record all gauges in Tour book and on morning reports.
- D. MUD LOGGING PRORAM:** Mud logger will be on location from 500' to TD of intermediate casing. Then from mill out of intermediate casing to TD.

II. DRILLING

- A. MUD PROGRAM:** Clear water with benex to 7" casing point. Convert to a LSND mud to log and run pipe. Treat for lost circulation as necessary. Obtain 100% returns prior to cementing. Notify Engineering of any mud losses.
- B. DRILLING FLUID:** Horizontal section will be drilled with produced water.

RECEIVED
B.L.M.-MAILROOM
2012 MAR 28 PM 2:04
STATE OFFICE
SANTA FE, NEW MEXICO

- C. **BOP TESTING:** While drill pipe is in use, the pipe rams and the blind rams will be function tested once each trip. The anticipated reservoir is expected to be less than 1300 psi, so the BOPE will be tested to **250 psi (Low) for 5 minutes** and **1500 psi (High) for 10 minutes**. Utilize a BOPE Testing Unit with a recording chart and appropriate test plug for testing. The drum brakes will be inspected and tested each tour. **All tests and inspections will be recorded in the tour book as to time and results.**

III. **MATERIALS**

A. **CASING PROGRAM:**

<u>CASING TYPE</u>	<u>HOLE SIZE</u>	<u>DEPTH (MD)</u>	<u>CASING SIZE</u>	<u>WT. & GRADE</u>
Surface	12-1/4"	+ 300'	9-5/8"	36# K-55
Intermediate	8-3/4"	+/- 3,870'	7"	23# K-55
Prod. Liner	6-1/4"	+/- 3,300' - 7,071'	4-1/2"	11.6# K-55

Note: Intermediate casing is set 100' into Pictured Cliffs in the pilot hole. Production liner is 4-1/2" 11.6# Pre-perforated K-55 and the liner will be set with liner hanger 5-10' outside of the window.

B. **FLOAT EQUIPMENT:**

1. **SURFACE CASING:** 9-5/8" notched regular pattern guide shoe. Run (1) standard centralizer on each of the bottom (4) joints of Surface Casing.
2. **INTERMEDIATE CASING:** 7" cement nose guide shoe with a self-fill insert float. Place float collar one joint above the shoe. Install (1) Turbulent centralizer on each of the bottom (3) joints and one standard centralizer every (3) joints to 2,500 ft. Run (1) Turbulent centralizer at 2,700 ft., 2,500 ft., 2,300ft., 2,000ft., 1,500 ft., and 1,000 ft. (**NTL-FRA 90-1**).
3. **PRODUCTION LINER / CASING:** No centralization

C. **CEMENTING:**

(Note: Volumes may be adjusted onsite due to actual conditions)

1. **SURFACE:** Slurry: 150sx (269.4 cu.ft.) of "Type III" + 2% Cal-Seal 60 + ¼ # of poly-e-flake/sk + 0.3% Versaset + 2% Econolite + 6% Salt (Yield = 1.796 cu.ft./sk, Weight = 13.5 #/gal.). The 100% excess should circulate cement to the surface. WOC 12 hours. Test csg to 600psi.
2. **INTERMEDIATE:** Lead - 340 sx (928.2 cu.ft.) of "EXTENDACEM" + 5 #/sk pheno-seal + 5% Cal-Seal 60 (Yield = 2.723 cu.ft./sk, Weight = 11.5 #/gal.). Tail - 100 sx (117.8cu.ft.) of Premium cement + 0.125 #/sk Poly-E-Flake, (Yield = 1.178 cu.ft./sk, Weight = 15.6#/gal.). Total volume = 1046 cu.ft. Bump Plug to 1,500 psi. Notify engineering if cement is not circulated to surface. WOC 12 hours. Test csg to 1500psi.
3. **PRODUCTION LINER:** Open hole completion. No cement.

RECEIVED
B.L.M.-MAILROOM
2012 MAR 28 PM 2:04
STATE OFFICE
SANTA FE, NEW MEXICO

IV. COMPLETION

A. PRESSURE TEST

1. Pressure test 7" casing to 1500# for 15 minutes.

B. STIMULATION

1. No stimulation

C. RUNNING TUBING

1. Fruitland Coal: Run 2-7/8", 6.5#, J-55, EUE tubing with a SN on top of bottom joint. Land tubing approximately 50' above PBTD of 7" casing.


Larry Higgins
Permit Supervisor

RECEIVED
B.L.M.-MAILROOM
2012 MAR 28 PM 2:04
STATE OFFICE
SANTA FE, NEW MEXICO



Schalk 32-2B ST01
Sec 32 T31N R04W - 32-2B

Rio Arriba Co., NM



GE: 6938' / KB: 14'

PATHFINDER

A Schlumberger Company

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
LAND 32-2B3743 0		176.3	403.92130658.55	199090.10		Point
TD 32-2B ST01 7071.5 0		1407.4	3223.82131859.14	201923.13		Point

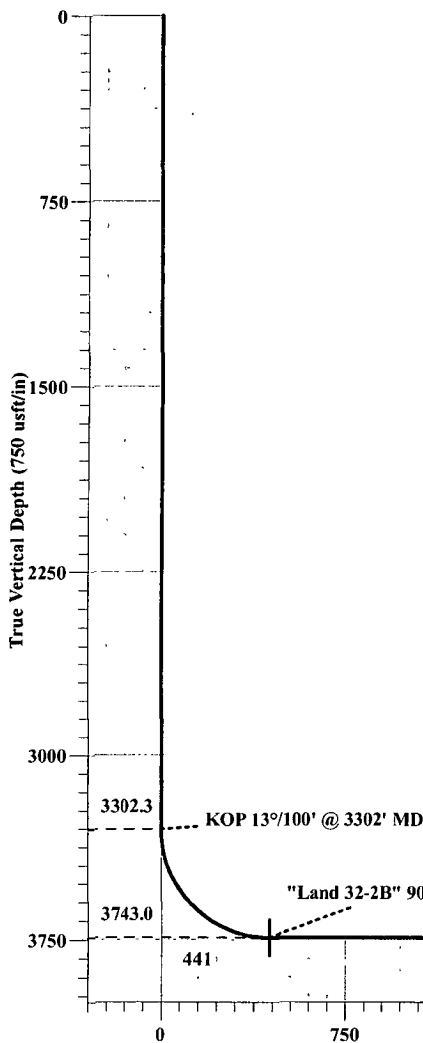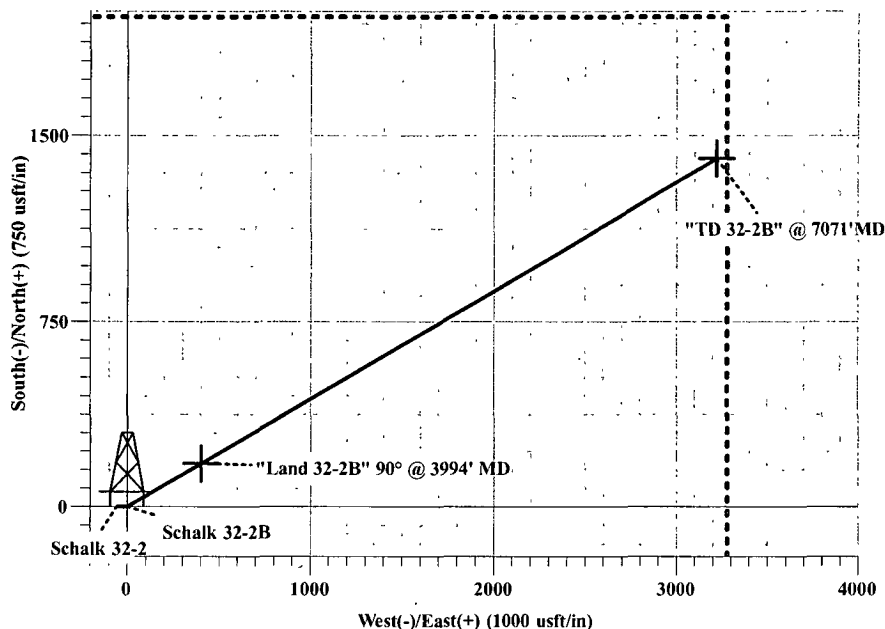

WELL DETAILS: Schalk 32-2B

Ground Level:	6938.0
Northing	2130486.61
Easting	198684.33
Latitude	36° 51' 2.340 N
Longitude	107° 16' 47.424 W

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
3302.3	0.00	0.00	3302.3	0.0	0.0	0.00	0.00	0.0	
3994.6	90.00	66.42	3743.0	176.3	403.9	13.00	66.42	440.7	
7071.5	90.00	66.42	3743.0	1407.4	3223.8	0.00	0.00	3517.6	TD 32-2B ST01

RECEIVED
B.L.M.-MAIL ROOM
2012 MAR 28 PM 2:05
STATE OFFICE
SANTA FE, NEW MEXICO

Plan: Design #2 (Schalk 32-2B/ST01)

Created By: Breck Enoch

Date: 07-Dec-2011

Planning Report

Database: EDM 5000 1 Single User Db
 Company: Williams Production Co
 Project: Rio Arriba Co., NM
 Site: Sec 32 T31N R04W - 32-2B
 Well: Schalk 32-2B
 Wellbore: ST01
 Design: Design #2

Local Co-ordinate Reference: Site Sec 32 T31N R04W - 32-2B
 TVD Reference: WELL @ 6952.0usft (Original Well Elev)
 MD Reference: WELL @ 6952.0usft (Original Well Elev)
 North Reference: True
 Survey Calculation Method: Minimum Curvature

Project: Rio Arriba Co., NM
 Map System: US State Plane 1927 (Exact solution)
 Geo Datum: NAD 1927 (NADCON CONUS)
 Map Zone: New Mexico Central 3002
 System Datum: Mean Sea Level

Site: Sec 32 T31N R04W - 32-2B
 Site Position: Northing: 2,130,486.61 usft Latitude: 36° 51' 2.340 N
 From: Lat/Long Easting: 198,684.33 usft Longitude: 107° 16' 47.424 W
 Position Uncertainty: 0.0 usft Slot Radius: 13-3/16" Grid Convergence: -0.62°

Well: Schalk 32-2B
 Well Position: +N/-S 0.0 usft Northing: 2,130,486.61 usft Latitude: 36° 51' 2.340 N
 +E/-W 0.0 usft Easting: 198,684.33 usft Longitude: 107° 16' 47.424 W
 Position Uncertainty: 0.0 usft Wellhead Elevation: Ground Level: 6,938.0 usft

Wellbore: ST01
 Magnetics: Model Name Sample Date Declination Dip Angle Field Strength
 (°) (°) (nT)
 IGRF2010 12/2/2011 9.65 63.64 50,812

Design: Design #2
 Audit Notes:
 Version: Phase: PROTOTYPE Tie On Depth: 0.0
 Vertical Section: Depth From (TVD) +N/-S +E/-W Direction
 (usft) (usft) (usft) (°)
 0.0 0.0 0.0 66.42

Plan Sections

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
3,302.3	0.00	0.00	3,302.3	0.0	0.0	0.00	0.00	0.00	0.00	
3,994.6	90.00	66.42	3,743.0	176.3	403.9	13.00	13.00	0.00	66.42	
7,071.5	90.00	66.42	3,743.0	1,407.4	3,223.8	0.00	0.00	0.00	0.00	TD 32-2B ST01

RECEIVED
 B.L.M.-MAIL ROOM
 2012 MAR 28 PM 2:05
 STATE OFFICE
 SANTA FE, NEW MEXICO

Planning Report

Database: EDM 5000 1 Single User Db
 Company: Williams Production Co
 Project: Rio Arriba Co , NM
 Site: Sec 32 T31N R04W - 32-2B
 Well: Schalk 32-2B
 Wellbore: ST01
 Design: Design #2

Local Co-ordinate Reference: Site Sec 32 T31N R04W - 32-2B
 TVD Reference: WELL @ 6952 0usft (Original Well Elev)
 MD Reference: WELL @ 6952 0usft (Original Well Elev)
 North Reference: True
 Survey Calculation Method: Minimum Curvature

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0 0	0.00	0 00	0 0	0.0	0 0	0 0	0 00	0.00	0 00	
100 0	0.00	0 00	100 0	0 0	0 0	0 0	0 00	0.00	0 00	
200 0	0.00	0 00	200 0	0 0	0 0	0 0	0.00	0 00	0.00	
300.0	0.00	0 00	300 0	0.0	0 0	0 0	0 00	0 00	0 00	
400 0	0.00	0 00	400 0	0 0	0 0	0 0	0 00	0 00	0 00	
500 0	0.00	0.00	500 0	0 0	0 0	0.0	0 00	0 00	0 00	
600 0	0.00	0 00	600 0	0.0	0 0	0 0	0 00	0 00	0 00	
700 0	0.00	0 00	700 0	0 0	0 0	0 0	0.00	0 00	0.00	
800 0	0.00	0 00	800.0	0 0	0 0	0 0	0 00	0 00	0 00	
900 0	0.00	0 00	900 0	0 0	0 0	0 0	0.00	0 00	0 00	
1,000 0	0.00	0 00	1,000.0	0.0	0 0	0 0	0 00	0 00	0 00	
1,100 0	0.00	0.00	1,100.0	0 0	0 0	0.0	0 00	0 00	0 00	
1,200 0	0.00	0 00	1,200 0	0 0	0 0	0 0	0.00	0 00	0.00	
1,300 0	0.00	0 00	1,300.0	0 0	0 0	0 0	0 00	0 00	0 00	
1,400 0	0.00	0 00	1,400.0	0 0	0 0	0 0	0 00	0 00	0 00	
1,500 0	0.00	0 00	1,500.0	0.0	0 0	0 0	0 00	0 00	0 00	
1,600 0	0.00	0 00	1,600 0	0 0	0 0	0 0	0 00	0 00	0 00	
1,700 0	0.00	0 00	1,700 0	0 0	0 0	0 0	0.00	0 00	0.00	
1,800.0	0.00	0 00	1,800 0	0 0	0 0	0 0	0 00	0 00	0 00	
1,900 0	0.00	0 00	1,900 0	0 0	0 0	0 0	0 00	0 00	0 00	
2,000 0	0.00	0 00	2,000 0	0 0	0 0	0 0	0 00	0 00	0.00	
2,100 0	0.00	0 00	2,100 0	0.0	0 0	0 0	0 00	0.00	0 00	
2,200 0	0.00	0 00	2,200 0	0 0	0 0	0 0	0 00	0 00	0 00	
2,300 0	0.00	0 00	2,300 0	0 0	0 0	0 0	0 00	0 00	0 00	
2,400 0	0.00	0 00	2,400 0	0 0	0 0	0 0	0 00	0 00	0 00	
2,500.0	0.00	0.00	2,500 0	0 0	0 0	0 0	0 00	0 00	0 00	
2,600 0	0.00	0 00	2,600.0	0 0	0.0	0 0	0 00	0 00	0 00	
2,700 0	0.00	0.00	2,700.0	0 0	0 0	0 0	0 00	0 00	0 00	
2,800 0	0.00	0 00	2,800 0	0 0	0 0	0 0	0.00	0 00	0 00	
2,900 0	0.00	0.00	2,900.0	0 0	0 0	0 0	0 00	0 00	0 00	
3,000 0	0.00	0 00	3,000 0	0 0	0.0	0.0	0 00	0 00	0 00	
3,100 0	0.00	0 00	3,100.0	0.0	0 0	0 0	0.00	0 00	0 00	
3,200.0	0.00	0 00	3,200 0	0 0	0 0	0 0	0 00	0 00	0 00	
3,300 0	0.00	0 00	3,300 0	0 0	0 0	0 0	0 00	0 00	0 00	
3,302.3	0.00	0 00	3,302.3	0 0	0 0	0 0	0 00	0 00	0.00	
3,400 0	12 71	66 42	3,399 2	4 3	9 9	10 8	13 00	13 00	0 00	
3,500 0	25 71	66 42	3,493 4	17 5	40 0	43.6	13 00	13.00	0 00	
3,600 0	38 71	66 42	3,577 9	38 7	88 7	96 8	13 00	13 00	0 00	
3,700 0	51 71	66.42	3,648 2	67 1	153 6	167 6	13 00	13 00	0 00	
3,800 0	64 71	66.42	3,700.7	101 0	231 3	252 4	13.00	13 00	0 00	
3,900 0	77 71	66 42	3,732 9	138 8	317 9	346 9	13.00	13 00	0 00	
3,994 6	90 00	66.42	3,743 0	176.3	403 9	440 7	13 00	13 00	0 00	
4,000 0	90.00	66 42	3,743 0	178 5	408 9	446 2	0 00	0 00	0.00	
4,100 0	90 00	66 42	3,743 0	218.5	500.5	546.2	0.00	0 00	0 00	
4,200 0	90.00	66 42	3,743.0	258 5	592.2	646 2	0 00	0 00	0.00	
4,300 0	90.00	66 42	3,743 0	298.5	683 8	746 2	0.00	0 00	0 00	
4,400 0	90 00	66 42	3,743 0	338 5	775 5	846 2	0 00	0 00	0 00	
4,500 0	90 00	66 42	3,743 0	378 6	867.1	946 2	0 00	0 00	0 00	
4,600.0	90 00	66 42	3,743 0	418 6	958 8	1,046 2	0 00	0 00	0 00	
4,700 0	90 00	66 42	3,743 0	458.6	1,050 4	1,146 2	0 00	0 00	0 00	
4,800 0	90 00	66 42	3,743 0	498 6	1,142.1	1,246 2	0 00	0 00	0 00	
4,900 0	90 00	66 42	3,743 0	538.6	1,233.7	1,346 2	0 00	0 00	0 00	
5,000 0	90 00	66.42	3,743 0	578 6	1,325.4	1,446.2	0 00	0 00	0 00	
5,100 0	90 00	66 42	3,743 0	618 6	1,417.0	1,546 2	0 00	0 00	0 00	

Planning Report

Database: EDM 5000 1 Single User Db
 Company: Williams Production Co
 Project: Rio Arriba Co, NM
 Site: Sec 32 T31N R04W - 32-2B
 Well: Schalk 32-2B
 Wellbore: ST01
 Design: Design #2

Local Co-ordinate Reference:
 TVD Reference:
 MD Reference:
 North Reference:
 Survey Calculation Method:

Site Sec 32 T31N R04W - 32-2B
 WELL @ 6952 0usft (Original Well Elev)
 WELL @ 6952 0usft (Original Well Elev)
 True
 Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,200 0	90 00	66 42	3,743 0	658 6	1,508 7	1,646 2	0 00	0 00	0 00
5,300 0	90 00	66 42	3,743 0	698 6	1,600 3	1,746 2	0 00	0 00	0 00
5,400 0	90 00	66 42	3,743 0	738 6	1,692 0	1,846 2	0 00	0 00	0 00
5,500 0	90 00	66 42	3,743 0	778 6	1,783 6	1,946 2	0 00	0 00	0 00
5,600 0	90 00	66 42	3,743 0	818 6	1,875 3	2,046 2	0 00	0 00	0 00
5,700 0	90 00	66 42	3,743 0	858 7	1,966 9	2,146 2	0 00	0 00	0 00
5,800 0	90 00	66 42	3,743 0	898 7	2,058 6	2,246 2	0 00	0 00	0 00
5,900 0	90 00	66 42	3,743 0	938 7	2,150 2	2,346 2	0 00	0 00	0 00
6,000 0	90 00	66 42	3,743 0	978 7	2,241 9	2,446 2	0 00	0 00	0 00
6,100 0	90 00	66 42	3,743 0	1,018 7	2,333 5	2,546 2	0 00	0 00	0 00
6,200 0	90 00	66 42	3,743 0	1,058 7	2,425 1	2,646 2	0 00	0 00	0 00
6,300 0	90 00	66 42	3,743 0	1,098 7	2,516 8	2,746 2	0 00	0 00	0 00
6,400 0	90 00	66 42	3,743 0	1,138 7	2,608 4	2,846 2	0 00	0 00	0 00
6,500 0	90 00	66 42	3,743 0	1,178 7	2,700 1	2,946 2	0 00	0 00	0 00
6,600 0	90 00	66 42	3,743 0	1,218 7	2,791 7	3,046 2	0 00	0 00	0 00
6,700 0	90 00	66 42	3,743 0	1,258 7	2,883 4	3,146 2	0 00	0 00	0 00
6,800 0	90 00	66 42	3,743 0	1,298 8	2,975 0	3,246 2	0 00	0 00	0 00
6,900 0	90 00	66 42	3,743 0	1,338 8	3,066 7	3,346 2	0 00	0 00	0 00
7,000 0	90 00	66 42	3,743 0	1,378 8	3,158 3	3,446 2	0 00	0 00	0 00
7,071 5	90 00	66 42	3,743 0	1,407 4	3,223 8	3,517 6	0 00	0 00	0 00

Design Targets

Target Name	Dip Angle (°)	Dip Dir (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
hit/miss target									
- Shape									
TD 32-2B ST01	0 00	0 00	3,743 0	1,407 4	3,223 8	2,131,859 14	201,923 14	36° 51' 16 254 N	107° 16' 7 759 W
- plan hits target center									
- Point									
LAND 32-2B	0 00	0 00	3,743 0	176 3	403 9	2,130,658 55	199,090 11	36° 51' 4 083 N	107° 16' 42 455 W
- plan hits target center									
- Point									

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
3,302 3	3,302 3	0 0	0 0	KOP 13°/100' @ 3302' MD
3,994 6	3,743 0	176 3	403.9	"Land 32-2B" 90° @ 3994' MD
7,071 5	3,743 0	1,407 4	3,223 8	"TD 32-2B" @ 7071' MD

RECEIVED
 BLM-MAILROOM
 2012 MAR 28 PM 2:05
 STATE OFFICE
 SANTA FE, NEW MEXICO

Well Control Equipment Schematic for 2M Service

Attachment to Drilling Technical Program

Exhibit #1 Typical BOP setup

Location: San Juan Basin, New Mexico

Date: August 20, 2001

By: John Thompson (Walsh E&P)

